



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671

BOTTLE INTELLIGENT FILLING LINE

- Linear Filling Machine
- Semi Automatic Filling Machine
- Filling Capping 2 In 1 Machine
- Washing Filling Capping 3In 1 Machine
- Powder/Granule Filling Machine
- Bottle Unscrambler
- Bottle Washing Machine
- Cap Unscramble
- Capping Machine
- Sealing Machine



CONTACT US

Multimagotrade.com
+40-758-667-671

GP125伺服活塞式灌装机 Servo Piston Filling Machine

产品描述 Product Description

本机适用于膏体、酱料、液体的灌装，适用于食品、医药、日化等行业，如辣椒酱、番茄酱、沙拉酱、调味料、蜂蜜、面霜、精油、润肤霜、精油、洗眼液等产品的灌装。

This machine is suitable for filling pastes, sauces, and liquids, and is suitable for food, medicine, daily chemical and other industries, such as filling chili sauce, ketchup, salad dressing, seasoning, honey, facial cream, essential oil, moisturizer, essential oil, eye wash and other products.



技术参数 Technical Parameters

型号 Model	GP125-4	GP125-6	GP125-8	GP125-10	GP125-12
灌装容量范围 Filling Range			30-125ml		
灌装头数 Filling nozzle	4	6	8	10	12
产量(以100ml为例) Capacity(based on 100ml)	≤1200瓶/时 bottles/hour	≤1800瓶/时 bottles/hour	≤2400瓶/时 bottles/hour	≤3000瓶/时 bottles/hour	≤3600瓶/时 bottles/hour
灌装精度 Accuracy	≤±0.5%				
电压 Voltage	AC220V/380V 50/60HZ (特殊可定制 Special customizable)				
消耗功率 Power	2.0KW	2.0KW	2.5KW	3KW	3KW
气源压力 Air pressure	0.5-0.8Mpa				
设备尺寸 Dimension/mm	1200*1150*2100	1600*1150*2100	1600*1150*2100	1800*1150*2100	2000*1150*2100

GP500 伺服活塞式灌装机 Servo Piston Filling Machine

产品描述 Product Description

本机适用于膏体、酱料、液体的灌装，适用于食品、医药、日化、化工等行业，如洗手液、护发素、润肤膏、磨砂膏、营养液、车用油、稀释液等产品的灌装。

This machine is suitable for filling pastes, sauces, and liquids. It is suitable for food, medicine, daily chemicals, chemical and other industries, such as filling hand sanitizer, conditioner, moisturizer, scrub, ect.



技术参数 Technical Parameters

型号 Model	GP500-4	GP500-6	GP500-8	GP500-10	GP500-12
灌装容量范围 Filling Range			50-500ml		
灌装头数 Filling nozzle	4	6	8	10	12
产量(以500ml为例) Capacity(based on 500ml)	≤1200瓶/时 bottles/hour	≤1800瓶/时 bottles/hour	≤2400瓶/时 bottles/hour	≤3000瓶/时 bottles/hour	≤3600瓶/时 bottles/hour
灌装精度 Accuracy	≤±0.5%				
电压 Voltage	AC220V/380V 50-60HZ (特殊可定制 Special customizable)				
消耗功率 Power	2.5KW	3.0KW	3.0KW	3.5KW	3.5KW
气源压力 Air pressure	0.5-0.8Mpa				
设备尺寸 Dimension/mm	1400*1150*2100	1600*1150*2100	1800*1150*2100	2000*1150*2100	2000*1150*2100



CONTACT US

Multimagotrade.com
+40-758-667-671

GP1000 伺服活塞式灌装机 Servo Piston Filling Machine

产品描述 Product Description

本机适用于膏体、酱料、液体的灌装，适用于食品、医药、日化、化工、润滑油等行业，如洁厕液、洗衣液、消毒液、凝胶类、防冻液、营养液、农药、食用油、玻璃水、润滑油等产品的灌装。
This machine is suitable for filling pastes, sauces, and liquids. It is suitable for food, medicine, daily chemicals, chemicals, lubricants and other industries, such as filling toilet cleaners, laundry detergents, disinfectants, gels, antifreeze, nutrient solutions, pesticides, edible oils, windshield washers, lubricants and other products.



技术参数 Technical Parameters


型号 Model	GP1000-4	GP1000-6	GP1000-8	GP1000-10	GP1000-12
灌装容量范围 Filling Range	100-1000ml				
灌装头数 Filling nozzle	4	6	8	10	12
产量(以1000ml为例) Capacity(based on 1000ml)	≤1200瓶/时 bottles/hour	≤1800瓶/时 bottles/hour	≤2400瓶/时 bottles/hour	≤3000瓶/时 bottles/hour	≤3600瓶/时 bottles/hour
灌装精度 Accuracy	≤±0.5%				
电压 Voltage	AC220V/380V 50-60HZ (特殊可定制 Special customizable)				
消耗功率 Power	2.5KW	3.0KW	3.0KW	3.5KW	3.5KW
气源压力 Air pressure	0.5-0.8Mpa				
设备尺寸 Dimension/mm	1600*1200*2100	2000*1200*2100	2000*1200*2100	2200*1200*2100	2200*1200*2100

GP3000 伺服活塞式灌装机 Servo Piston Filling Machine

产品描述 Product Description

本机适用于膏体、酱料、液体的灌装，适用于食品、医药、日化、化工、润滑油等行业，如添加剂、洗衣液、消毒液、凝胶类、防冻液、营养液、农药、食用油、润滑油等产品的灌装。

This machine is suitable for filling pastes, sauces, and liquids. It is suitable for food, medicine, daily chemicals, chemicals, lubricants and other industries, such as filling additives, laundry detergents, disinfectants, gels, antifreeze, nutrient solutions, pesticides, edible oil, lubricate oil/motor oil.

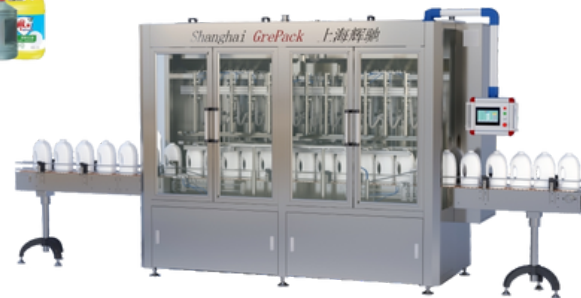

技术参数 Technical Parameters

型号 Model	GP3000-4	GP3000-6	GP3000-8	GP3000-10	GP3000-12
灌装容量范围 Filling Range	500-3000ml				
灌装头数 Filling nozzle	4	6	8	10	12
产量(以1000ml为例) Capacity(based on 1000ml)	≤1200瓶/时 bottles/hour	≤1500瓶/时 bottles/hour	≤2000瓶/时 bottles/hour	≤2400瓶/时 bottles/hour	≤3000瓶/时 bottles/hour
灌装精度 Accuracy	≤±0.5%				
电压 Voltage	AC220V/380V 50-60HZ (特殊可定制 Special customizable)				
消耗功率 Power	3.0KW	3.5KW	3.5KW	4.0KW	5.0KW
气源压力 Air pressure	0.5-0.8Mpa				
设备尺寸 Dimension/mm	1600*1250*2200	2000*1250*2200	2200*1250*2200	2400*1250*2200	3000*1800*2200



CONTACT US

GP5000 伺服活塞式灌装机 Servo Piston Filling Machine

产品描述 Product Description

本机适用于膏体、酱料、液体的灌装，适用于食品、医药、日化、化工、润滑油等行业，如添加剂、洗衣液、消毒液、防冻液、营养液、农药、食用油、润滑油等产品的灌装。

This machine is suitable for filling pastes, sauces, and liquids. It is suitable for food, medicine, daily chemicals, chemicals, lubricants and other industries, such as filling additives, laundry detergents, disinfectants, antifreeze, nutrient solutions, pesticides, edible oils, lubricants and other products.



技术参数 Technical Parameters

型号 Model	GP5000-4	GP5000-6	GP5000-8	GP5000-10	GP5000-12
灌装容量范围 Filling Range	1000-5000ml				
灌装头数 Filling nozzle	4	6	8	10	12
产量(以1000ml为例) Capacity(based on 1000ml)	≤900瓶/时 bottles/hour	≤1400瓶/时 bottles/hour	≤1700瓶/时 bottles/hour	≤2100瓶/时 bottles/hour	≤2500瓶/时 bottles/hour
灌装精度 Accuracy	≤ ± 0.5%				
电压 Voltage	AC220V/380V 50-60HZ (特殊可定制 Special customizable)				
消耗功率 Power	3.5KW	4.0KW	4.5KW	5.5KW	6.5KW
气源压力 Air pressure	0.5-0.8Mpa				
设备尺寸 Dimension/mm	1800*1250*2200	2000*1250*2200	2400*1250*2200	2600*1250*2200	3200*1800*2200

GPT跟踪式灌装机 Tracking Filling Machine

产品描述 Product Description

本机在灌装工作中可以控制灌装嘴跟随移动的瓶子，各喷嘴可单独控制进行高精度灌装，适用于食品、医药、日化、化工、润滑油等行业，如添加剂、洗衣液、消毒液、防冻液、营养液、农药、食用油、润滑油等产品的灌装。

During the filling process, the machine can control the filling nozzle to follow the moving bottle. Each nozzle can be controlled individually for high-precision filling. It is suitable for food, medicine, daily chemicals, chemicals, lubricants and other industries, such as filling additives, laundry detergents, disinfectants, antifreeze, nutrient solutions, pesticides, edible oils, lubricants and other products.



技术参数 Technical Parameters

型号 Model	GPT5000-2	GPT5000-4
灌装头数 Filling Nozzle	2	4
灌装容量范围 Filling Range	1000-5000ml	
计量方式 Measurement method	容积式 Measuring method	
产量(以1000ml为例) Capacity(based on 1000ml)	≤1800瓶/时 bottles/hour	≤3600瓶/小时 bottles/hour
灌装精度 Accuracy	≤ ± 1%	
电压 Voltage	AC380V 50-60HZ (特殊可定制 special customizable)	
消耗功率 Power	3.2KW	6.4KW
气源压力 Air pressure	0.5-0.7Mpa	
设备尺寸 Dimension(mm)	1800*1500*2200	2200*1600*2200



CONTACT US

Multimagotrade.com
+40-758-667-671

GPS系列防腐蚀灌装机 Anti-corrosion Filling Machine

产品描述 Product Description

本机专用于处理腐蚀性液体或化学品的灌装，适用于油料，油漆，油墨，固化剂，胶粘剂，有机溶剂，清洗剂，稀释剂，树脂，聚氨酯，农药，医药，润滑油及各种可流动性液体。

This machine is specially used for filling corrosive liquids or chemicals, and is suitable for oil, paint, ink, curing agent, adhesive, organic solvent, cleaning agent, diluent, resin, polyurethane, pesticide, medicine, lubricant and various flowable liquids.



技术参数 Technical Parameters


型号 Model	GPS-6	GPS-8	GPS-10	GPS-12	GPS-14	GPS-16
灌装容量范围 Filling Range	100-5000ml,其他装量定制 customized for other sizes					
理想灌装范围 Ideal Filling Range	100-1000ml/500-3000ml/1000-5000ml					
计量方式 Measurement method	时间控制、流量计控制、重力灌装，适用于无粘度的物料 Time control, flow meter control, gravity filling, suitable for materials without viscosity					
灌装头数 Filling Nozzle	6	8	10	12	14	16
产量(以1000ml为例) Capacity(based on 1000ml)	≤1000瓶/时 bottles/hour	≤1300瓶/时 bottles/hour	≤1600瓶/时 bottles/hour	≤2100瓶/时 bottles/hour	≤2400瓶/时 bottles/hour	≤2700瓶/时 bottles/hour
灌装精度 Accuracy	±1%					
电压 Voltage	AC220V/380V 50-60HZ (特殊可定制 Special customizable)					
消耗功率 Power	1.2KW	1.2KW	1.5KW	1.5KW	2.0KW	2.0KW
气源压力 Air pressure	0.5-0.8Mpa					
设备尺寸 Dimension(mm)	2000*1150*2200	2200*1150*2200	2400*1150*2200	2600*1150*2200	2800*1150*2200	3000*1150*2200

GPS自流式灌装机 Gravity Filling Machine

产品描述 Product Description

本机适用于各种水剂、易起泡、易流动液体的灌装，适用于医药、日化、食品、农药及特殊行业中，如车用尿素、泡泡水、清洁剂、玻璃水、液体化肥等。

This machine is suitable for filling various aqueous solutions, easy-to-foam and easy-to-flow liquids. It is suitable for medicine, daily chemicals, food, pesticides and special industries, such as automotive urea, bubble water, detergent, windshield washer fluid, liquid fertilizer, etc.

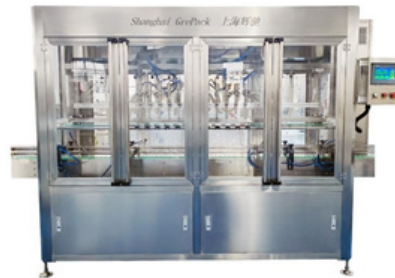

技术参数 Technical Parameters

型号 Model	GPS-6	GPS-8	GPS-10	GPS-12	GPS-14	GPS-16
灌装容量范围 Filling Range	100-5000ml,其他装量定制 customized for other sizes					
理想灌装范围 Ideal Filling Range	100-1000ml/500-3000ml/1000-5000ml					
计量方式 Measurement method	时间控制、流量计控制、重力灌装，适用于无粘度的物料 Time control, flow meter control, gravity filling, suitable for materials without viscosity					
灌装头数 Filling Nozzle	6	8	10	12	14	16
产量(以1000ml为例) Capacity(based on 1000ml)	≤1000瓶/时 bottles/hour	≤1300瓶/时 bottles/hour	≤1600瓶/时 bottles/hour	≤2100瓶/时 bottles/hour	≤2400瓶/时 bottles/hour	≤2700瓶/时 bottles/hour
灌装精度 Accuracy	±1%					
电压 Voltage	AC220V/380V 50-60HZ (特殊可定制 Special customizable)					
消耗功率 Power	1.2KW	1.2KW	1.5KW	1.5KW	2.0KW	2.0KW
气源压力 Air pressure	0.5-0.8Mpa					
设备尺寸 Dimension(mm)	2000*1150*2200	2200*1150*2200	2400*1150*2200	2600*1150*2200	2800*1150*2200	3000*1150*2200



CONTACT US

Multimagotrade.com
+40-758-667-671

GPW全自动称重式灌装机 Automatic Weighing Filling Machine

产品描述 Product Description

本机适用于膏体、酱料、液体的灌装，适用于食品、医药、日化、化工、润滑油等行业，如添加剂、洗衣液、消毒液、凝胶类、防冻液、营养液、农药、食用油、润滑油等产品的灌装。

This machine is suitable for filling pastes, sauces, and liquids. It is suitable for food, medicine, daily chemicals, chemicals, lubricants and other industries, such as filling additives, laundry detergents, disinfectants, gels, antifreeze, nutrient solutions, pesticides, edible oils, lubricants and other products.



技术参数 Technical Parameters

型号 Model	GPW-1	GPW-2	GPW-3	GPW-4	GPW-6
灌装头数 Filling Nozzle	1	2	3	4	6
灌装容量范围 Filling Range	5-50L				
计量方式 Measuring method	称重计量 Weighing and measuring				
产量(以20L为例) Capacity(based on 20L)	≤120瓶/时 bottles/hour	≤240瓶/时 bottles/hour	≤360瓶/时 bottles/hour	≤480瓶/时 bottles/hour	≤720瓶/时 bottles/hour
灌装精度 Accuracy	≤0.1%				
防爆等级 Explosion-proof grade	Exd11BT4				
电压 Voltage	AC220V/380V 50-60HZ (特殊可定制 Special customizable)				
消耗功率 Power	1.6KW	2.0KW	2.5KW	3KW	4KW
气源压力 Air Pressure	0.5-0.8Mpa				

半自动称重式灌装机 Semi-automatic Weighing Filling Machine

产品描述 Product Description

本机可用于各种液体及粘性材料的中大桶称重灌装，适用于食品、医药、日化、化工、润滑油等行业，如添加剂、调味料、消毒液、油料、油漆、油墨、固化剂、胶粘剂等产品的灌装。

This machine can be used for medium barrels of various liquid and viscosity materials. It is suitable for food, medicine, daily chemicals, chemical, lubricant and other industries, such as additives, seasonings, disinfectant, oil, paint, ink, curing agent, adhesive and other products.



技术参数 Technical Parameters

型号 Model	GP-20	GP-50	GP-200	GP-1000
灌装容量范围 Filling Range	≤20kg	≤50kg	≤200kg	≤1000kg
计量方式 Measurement method	称重计量 Weighing and measuring			
产量 Capacity	90-120桶/时 Barrels/hour	70-80桶/时 Barrels/hour	60-70桶/时 Barrels/hour	4-10桶/时 Barrels/hour
灌装精度 Accuracy	≤0.1%			
分度值 Division	5g			
灌装头材质 Filling Nozzle Material	SUS304 SUS316 PTFE(可选 can choose)			
防爆等级 Explosion-proof grade	Exd11BT4			
电压 Voltage	AC220V 50-60HZ (特殊可定制 Special customizable)			
消耗功率 Power	0.1KW	0.1KW	0.1KW	0.2KW
气源压力 Air Pressure	0.5-0.7Mpa			



CONTACT US

Multimagotrade.com
+40-758-667-671

半自动灌装机 Semi Automatic Filling Machine

产品描述 Product Description

本机适用于水状到膏状的任何种类的粘稠度产品的定量灌装，广泛用于日化、医药、化工、润滑油及精细化工行业。

This machine is suitable for quantitative filling of any kind of viscous products from water to paste, and is widely used in daily chemical, pharmaceutical, chemical, lubricant and fine chemical industries.



技术参数 Technical Parameters

型号 Model	GP-G100	GP-G200	GP-G500	GP-G1000	GP-G2600	GP-G5000
灌装容量范围 Filling Range	5-100ml	10-200ml	50-500ml	100-1000ml	500-2600ml	1000-5000ml
产量 Capacity	≤180瓶/时 Barrels/hour	≤170瓶/时 Barrels/hour	≤160瓶/时 bottles/hour	≤150瓶/时 bottles/hour	≤130瓶/时 bottles/hour	≤120瓶/时 bottles/hour
灌装精度 Accuracy	0.5-1%					
灌装头材质 Filling Nozzle Material	SUS304 SUS316 (可选 can choose)					
电压 Voltage	AC220V 50-60HZ (特殊可定制 Special customizable)					
消耗功率 Power	0.1KW	0.1KW	0.1KW	0.1KW	0.1KW	0.1KW
气源压力 Air Pressure	0.4-0.6Mpa					

GPJ500-2 酱料膏体灌装机 Sauce/Cream Filling Machine

产品描述 Product Description

本机适用于各种调味酱料、粘稠体、膏体、半流体和各种含颗粒物料的灌装；如辣椒酱、番茄酱、芝麻酱、花生酱、果酱、糖浆、蜂蜜、果肉饮料以及各类膏状物料。

This machine is suitable for filling various seasoning sauces, viscous bodies, pastes, semi-fluids and various granular materials; such as chili sauce, tomato sauce, sesame paste, peanut butter, jam.



技术参数 Technical Parameters

型号 Model	GPJ 500-1	GPJ 500-2
灌装头数 Filling heads	1	2
灌装容量范围 Filling Range	100-300ml	
灌装速度 Filling capacity	20-25瓶/分钟 Bottles/minute	40-50瓶/分钟 Bottles/minute
灌装精度 Accuracy	±1%	
气源压力 Air Pressure	0.6-0.7Mpa	
耗气量 Air consumption	0.2m3/min	
电源电压 Voltage	AC220V 50-60HZ (特殊可定制 Special customizable)	
消耗功率 Power	0.5KW	0.8KW



CONTACT US

GP-FC 眼药水灌装旋盖一体机 Eye Drops Filling Capping Machine

产品描述 Product Description

本机主要用于2-30ml圆形塑料瓶或玻璃瓶等各种材质的眼药水灌装，适用于医药、兽药等行业。

This machine is mainly used for filling eye drops in 2-30ml round plastic bottles or glass bottles and other materials, and is suitable for the pharmaceutical, veterinary and other industries.



技术参数 Technical Parameters

型号 Model	GP-FC	
灌装容量范围 Filling volume range	2-30ml	
灌装头数 Filling nozzle	1	2
产量 Capacity	≤2400瓶/小时 bottles/hour	≤3600瓶/小时 bottles/hour
灌装精度 Accuracy	≤±0.5%	
电压 Voltage	AC220V 50HZ (特殊可定制 Special Customizable)	
消耗功率 Power	3.0KW	3.5KW
气源压力 Air pressure	0.5-0.7Mpa	
设备尺寸 Dimension(mm)	2400*1500*2100	

GP-FC 精油灌装旋盖一体机 Essential Oil Filling Capping Machine

产品描述 Product Description

本机可广泛用于食品、制药、化妆品行业，适用于各种小剂量液体的灌装、压塞及旋(轧)盖，如精油、香水、指甲油、面霜、乳液试用装、眼药水、口服液等。

The machine can be widely used in food, pharmaceutical and cosmetics industries, and is suitable for filling, pressing and screwing (rolling) lids of various small doses of liquids, such as essential oil, perfume, nail polish, cream, emulsion trial package, ophthalmic liquid, oral liquid, etc.



技术参数 Technical Parameters

型号 Model	GP-FC	
灌装容量范围 Filling volume range	30-100ml	
灌装头数 Filling nozzle	1	2
产量(以100ml为例) Capacity(based on 100ml)	≤1800瓶/小时 bottles/hour	≤3600瓶/小时 bottles/hour
灌装精度 Accuracy	≤±0.5%	
电压 Voltage	AC220V 50HZ (特殊可定制 Special Customizable)	
消耗功率 Power	1.0KW	1.5KW
气源压力 Air pressure	0.5-0.7Mpa	
设备尺寸 Dimension(mm)	2000*1400*1600	



CONTACT US

GP-FC 诊断试剂灌装线 Diagnostic Reagent Filling Line

产品描述 Product Description

本生产线适用于冻存管、小容量的体外检测、缓冲液、清洗液、稀释液、酶免试剂等产品的灌装、旋盖、贴标等工序。

This production line is suitable for the filling, capping and labeling processes of cryopreservation tubes, small volume in vitro tests, buffer solutions, cleaning solutions, diluents, enzyme-free reagents and other products.



技术参数 Technical Parameters

计量方式 Measurement method	客户可选 Customer optional: 柱塞泵, 活塞泵, 蠕动泵等 Piston pump, piston pump, peristaltic pump, etc
灌装范围 Filling range	1ul-1.3ml、100ul-1.5ml、1-5ml (按客户实际产品规格 According to customer's actual product specifications)
生产能力 Capacity	2000-2200瓶/小时 Bottles / hour
灌装头数 Filling nozzle	2
旋盖头数 Capping head	2
灌装精度 Accuracy	1%
旋盖合格率 Pass rate	≥99.8%
气源压力 Air pressure	0.5-0.7Mpa
电压 Voltage	380V (220V), 50HZ (可定制 Customizable)
消耗功率 Consumption power	4KW
机器净重 Weight	860Kg

GP-FC 诊断试剂灌装线 Diagnostic Reagent Filling Line

产品描述 Product Description

本生产线适用于质控品、校准品、生化试剂、缓冲液、清洗液、稀释液等产品的灌装等产品的灌装、加塞、旋盖(轧铝盖)的生产。

This production line is suitable for the filling, stoppering and capping (aluminum twist cap) of quality control products, calibration products, biochemical reagents, buffer solutions, cleaning solutions, diluents and other products.



技术参数 Technical Parameters

计量方式 Measurement method	客户可选 Customer optional: 柱塞泵, 活塞泵, 蠕动泵等 Piston pump, piston pump, peristaltic pump, etc	
灌装范围 Filling range	5-50ml, 50-100ml, 100-150ml (按客户实际产品规格 According to customer's actual product specifications)	
灌装头数 Filling nozzle	2	4
旋盖头数 Capping head	1	2
灌装精度 Accuracy	1%	
旋盖合格率 Pass rate	≥99.8%	
气源压力 Air pressure	0.5-0.7Mpa	
电压 Voltage	380V (220V), 50HZ (可定制 Customizable)	
消耗功率 Consumption power	4KW	6KW
机器净重 Weight	900Kg	1100Kg




CONTACT US

GP-FC 口服液灌装旋盖一体机 Oral Liquid Filling Capping Machine

产品描述 Product Description

本机适用各种材质圆形瓶，各种规格盖子的灌装旋(轧)盖，广泛应用于医药、保健品等行业，如眼药水、口服液、药剂等液体产品的灌装。

This machine is suitable for filling and screwing (rolling) caps of round bottles made of various materials and caps of various specifications. It is widely used in the pharmaceutical and health care products industries, such as filling eye drops, oral liquids, medicines and other liquid products.

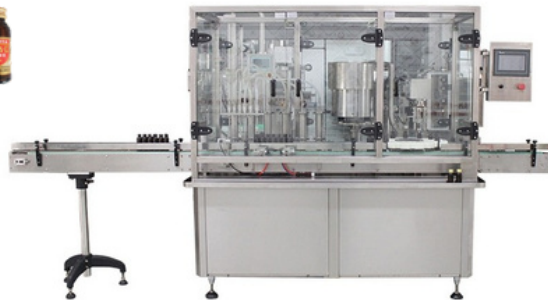

技术参数 Technical Parameters

型号 Model	GP-FC					
灌装容量范围 Filling volume range	10-200ml					
灌装头数 Filling nozzle	1	2	4	6	8	10
产量(以100ml为例) Capacity(based on 100ml)	≤1800瓶/小时 bottles/hour	≤2600瓶/小时 bottles/hour	≤3200瓶/小时 bottles/hour	≤3600瓶/小时 bottles/hour	≤4000瓶/小时 bottles/hour	≤4800瓶/小时 bottles/hour
灌装精度 Accuracy	≤ ± 0.5%					
电压 Voltage	AC220V/380V 50/60HZ (特殊可定制 Special Customizable)					
消耗功率 Power	2.0KW	2.4KW	3.2KW	4.0KW	4.8KW	6.0KW
气源压力 Air pressure	0.5-0.7Mpa					
设备尺寸 Dimension(mm)	1200*1200*1900	1600*1200*1900	1600*1200*1900	1800*1200*1900	2000*1200*1900	2200*1200*1900

GP-FC PP瓶玻璃瓶洗灌旋一体机 PP Bottle Washing Filling Capping Machine

产品描述 Product Description

本机为跟踪气洗、灌装、回转旋盖结构，灌装 12 工位，旋盖 12 工位。专为 10-60mlpp 瓶、玻璃瓶大健康产品的灌装。

This machine is a tracking air washing, filling, rotary capping structure, with 12 filling stations and 12 capping stations. It is specially designed for filling 10-60mlpp bottles and glass bottles of health products.



技术参数 Technical Parameters

灌装容量范围 Filling volume range	10-60ml	
灌装头数 Filling nozzle	12	
产量 Capacity	150-180瓶 bottles/分钟 minute	
灌装精度 Accuracy	≤ ± 1%	
电压 Voltage	AC220V/380V 50/60HZ (特殊可定制 Special Customizable)	
消耗功率 Power	5.5KW	
气源压力 Air pressure	0.4-0.7Mpa	
设备尺寸 Dimension(mm)	3450*1500*1800	



CONTACT US



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671

GP-XGF 系列洗灌封三合一灌装机 Washing Filling Capping 3 in 1 Filling Machine

产品描述 Product Description

本机适用于纯净水、矿泉水、含汽碳酸饮料、茶、果汁、含乳饮料、功能饮料等产品的灌装生产，适合各种容量及形状的PET瓶、玻璃瓶及铝瓶的洗瓶、灌装和旋盖。

Washing and rotating three-in-one filling machine is suitable for the filling production of pure water, mineral water, carbonated beverages, tea, juice, milk drinks, functional drinks and other products, suitable for washing, filling and capping of PET bottles, glass bottles and aluminum bottles of various capacities and shapes.



技术参数 Technical Parameters

型号 Model	XGF-8-8-3	XGF-16-16-6	XGF-18-18-6	XGF-24-24-8	XGF-32-32-10	XGF-40-40-12	XGF-60-60-15
冲洗头 Washing head	8	16	18	24	32	40	60
灌装头 Filling head	8	16	18	24	32	40	60
旋盖头 Capping head	3	6	6	8	10	12	15
生产能力 Capacity (500ml为例)	1000-2000	6000-8000	8000-10000	10000-12000	12000-15000	15000-20000	28000-32000
适合瓶型 Applied bottle shape	圆形或方形 Round or square bottle, 瓶径 (D) Φ 50-95mm, 瓶高 (H) 150-330mm						
灌装精度 Accuracy	$\leq \pm 1$ mm (液面定位)						
电源电压 Voltage	AC380V 50-60HZ (特殊可定制 special customizable)						
消耗功率 Power	1.5KW	3.0KW	3.8KW	4.2KW	5.6KW	6.4KW	9.6KW
气源压力 Air pressure	0.3-0.7Mpa						
设备尺寸 Dimension (mm)	2000*1500*2100	2350*1900*2400	2600*2000*2400	3000*2600*2400	3400*2600*2400	4200*3000*2400	6300*4400*2500

GP-CF 电子数粒机 Electronic Counting Filling Machine

产品描述 Product Description

本机适用于制药、食品等行业的各种不同形状、不同大小的药片、胶囊、丸剂的计数灌装。

This machine is suitable for counting and filling tablets, capsules and pills of various shapes and sizes in the pharmaceutical and food industries.



技术参数 Technical Parameters

型号 Model	GP-CF-8	GP-CF-16
通道数 Number of channels	8	16
生产能力 Capacity	≤ 6500 粒/分钟 Pcs/minute (直径5mm片剂为例 Take a 5mm diameter tablet as an example)	≤ 13000 粒/分钟 Pcs/minute (直径5mm片剂为例 Take a 5mm diameter tablet as an example)
瓶子规格 Bottle specifications	直径 diameter: 25-100mm; 高度 Height: 最高 max 220mm	直径 diameter: 25-100mm; 高度 Height: 最高 max 220mm
电源电压 Voltage	AC 220V: 50/60Hz	AC 220V: 50/60Hz
空气消耗量 Air consumption	3kg/cm ³ ; 200L/min	6kg/cm ³ ; 250L/min
功率 Power	1.5KW	2KW
外形尺寸 Dimension	2300*1100*1520mm	2840*1550*1700mm
整机重量 Weight	450kg	800kg



CONTACT US

Multimagotrade.com
+40-758-667-671

GP-F-500 粉剂灌装机 Powder Filling Machine

产品描述 Product Description

本机适用于粉末的高精度灌装，适用于食品、日化、医药、农药、兽药等行业。如芝麻粉、核桃粉、调味粉、咖啡粉等。

This machine is suitable for high precision filling of powders, and is suitable for food, daily chemicals, medicine, pesticides, veterinary drugs and other industries, such as sesame powder, walnut powder, seasoning powder, coffee powder, etc.



技术参数 Technical Parameters

包装重量 Packing weight	100-500g
包装精度 Accuracy	<100g, <±2%; 100-500g, <±1%; > 500g, <0.5%
充填速度 Filling speed	20-30次/分钟 times/minute
电源 Voltage	AC208V-415V 50/60Hz
整机功率 Power	1.9Kw
外形尺寸 Dimension	1060x650x1100mm
整机重量 Weight	220kg

GP-L-500 颗粒灌装机 Granule Filling Machine

产品描述 Product Description

本机适用于颗粒状、片状、条状及不规则形状物料的定量称重及分装，广泛用于食品、制药、化工等行业，如坚果、花生、糖果、中药颗粒、留香珠、宠物食品等。

This machine is suitable for quantitative weighing and packaging of granular, flake, strip and irregular shaped materials. It is widely used in food, pharmaceutical, chemical and other industries, such as nuts, peanuts, candy, Chinese medicine granules, fragrance beads, pet food, etc.



技术参数 Technical Parameters

型号 Model	GP-L-500
生产能力 Capacity	30-40罐/分钟 cans/minute
适应范围 Applicable range	罐径: 40-130mm 罐高: 60-190mm (特殊规格可定做) Jar/bottle diameter: 40-130mm Tank height: 60-190mm Special specifications can be customized)
电压 Voltage	三相 Three phase 380V 50Hz
功率 Power	2Kw
重量 Weight	1200Kg
外形尺寸 Dimension	2000x2000x3100mm (不含上料机 excluding feeding machine)
工作压力 Air pressure	约100L/分钟 About 100L/min



CONTACT US

T系列转盘理瓶机 Disc Type Bottle Sorting Machine

产品描述 Product Description

本机采用304不锈钢材料制作，是自动灌装流水生产线上连接和传送不可缺少的辅机，能将瓶子自动排列成单道或双道送入下道工序，并在流水线生产中起到储存、缓冲的作用。

This machine is made of 304 stainless steel material, is an indispensable auxiliary machine for connection and transmission of automatic filling production line, can automatically arrange bottles into single or double channels into the next process, and play the role of storage and buffer in the production line.



技术参数 Technical Parameters

型号 Model	T-600/800/1000/1200/1500
生产能力 Capacity	30-200瓶/分钟 bottles/min
适应范围 Applicable range	瓶径: 20-130mm 瓶高: 16-200mm (特殊规格可定做) Bottle diameter: 20-130mm Bottle height: 16-200mm (Special specifications can be customized)
电压 Voltage	220V 50Hz
功率 Power	0.12Kw
重量 Weight	120Kg
转盘直径 Disk diameter	有600/800/1000/1200/1500可选 Can be selected

BU系列自动回转式理瓶机 Automatic Rotary Round Bottle Unscrambler

产品描述 Product Description

把瓶子倒入理瓶机的存瓶仓中，通过带有光电检测功能的提升机自动至仓，通过相应的理瓶花盘和自动拨瓶机构，以及光电控制检测的装置，自动反瓶，把杂乱的瓶子整理成瓶口一致朝上的状态，整齐地排列到输送线上进入下一道工序。

Pour the bottle into the bottle storage bin of the bottle sorting machine, automatically send the bottle to the bottle bin through the elevator with the photoelectric detection function, through the corresponding bottle sorting flower plate and automatic bottle dialing mechanism, as well as the photoelectric control and detection device, automatically reverse the bottle, arrange the messy bottles into the bottle mouth uniformly upward state, neatly arranged on the conveyor line to enter the next process.



技术参数 Technical Parameters

型号 Model	BU-600/BU-900
生产能力 Capacity	≤200瓶/分钟 bottles/minute
适应范围 Applicable range	15-400ml
电压 Voltage	220V 50Hz
功率 Power	0.5Kw
重量 Weight	380Kg
转盘直径 Disk diameter	有600/900可选 Can be selected
外形尺寸 Dimension	1750x1250x1300mm



CONTACT US

直线高速理瓶机 Linear High Speed Bottle Unscrambler

产品描述 Product Description

高速自动理瓶机速度快，兼容性强，适用于各种形状的塑料瓶，如圆瓶、方瓶、扁瓶、异形瓶、椭圆形瓶等。

The High speed Automatic Bottle Unscrambler Machine is with high speed and high compatibility which are applicable to plastic bottles of all shapes, such as round bottles, square bottles, Flat bottles, irregular bottles, oval bottles, etc.



技术参数 Technical Parameters

型号 Model	LBU-200
生产能力 Capacity	50-150 bottles/min
适应范围 Applicable range	φ 20-φ 100mm
电压 Voltage	40-240mm
功率 Power	220V 50Hz
重量 Weight	0.6 Kw
转盘直径 Disk diameter	430Kg
外形尺寸 Dimension	2080mm*1200mm*1600mm

旋转高速理瓶机 Rotary High Speed Bottle Unscrambler

产品描述 Product Description

本机用于对杂乱的塑料瓶进行整理，将杂乱的瓶子由理瓶机送入储瓶段，在转盘的推力作用下，进入到位，在翻瓶装置和气流的作用下，将瓶子整理到瓶口向上，由风送式送瓶系统送入下一道工序。

The machine is used in ordering disordered polyester bottles. The disordered bottles are carried into the storing bottle section the ordering bottle machine. With the help of pushing force of the rotating disk, the bottles enter their position. With the function of the turning bottle device and the air-flow, the bottles are ordered into bottle mouth-up-position and are carried into the next process with the air-transferring type conveying bottle system.



技术参数 Technical Parameters

型号 Model	XBU-200
生产能力 Capacity	50-180 bottles/min
适应范围 Applicable range	15-1000ml
瓶直径 Bottle diameter	50-90mm
瓶高 Bottle height	150-340mm
电压 Voltage	220V 50Hz
功率 Power	3 Kw
重量 Weight	2000Kg



CONTACT US

转鼓式洗瓶机 Drum Type Bottle Washing Machine

产品描述 Product Description

本机主要用于制药行业口服液、水针、粉针瓶和模具瓶的内外清洗，分别用循环水、纯净水、净化压缩空气对瓶子进行冲洗。

This machine is mainly used for cleaning the inside and outside of oral liquid, water injection, powder injection bottles and mold bottles in the pharmaceutical industry. The bottles are rinsed with circulating water, pure water and purified compressed air respectively.



技术参数 Technical Parameters

型号 Model	ZG-100
生产能力 Capacity	40-50bottles/min
适应范围 Applicable range	10-100ml口服液瓶 oral liquid bottle
回用水量 Reuse water flow	0.5m³/h (pressure: 0.2~0.3MPa)
纯化水用量 Purified water consumption	0.5m³/h (pressure: 0.2~0.3MPa)
纯化压缩空气 Purified compressed air	0.4m³/min (pressure: 0.3~0.4MPa)
电源 Power supply	110V/220V/380V 50-60HZ
功率 Power	3 Kw
外形尺寸 Dimensions	2000*1400*1500mm

夹瓶式洗瓶机 Bottle Clamp Washing Machine

产品描述 Product Description

本机适用于清洗各种不同形状的瓶子，可完成玻璃瓶、PET、玻璃罐等容器的清洗吹干工序，是现代饮料、调味品生产厂家的首选设备。

This machine is suitable for washing bottles of various shapes and can complete the washing and drying process of glass bottles, PET, glass jars and other containers. It is the preferred equipment for modern beverage and condiment manufacturers.



技术参数 Technical Parameters

型号 Model	JB-100
生产能力 Capacity	≤100 瓶/分钟 bottles/min
适应范围 Applicable range	15-1000ml
瓶高 Bottle height	60-300mm
电压 Voltage	220V 50Hz
功率 Power	5.5Kw
重量 Weight	550Kg



CONTACT US

AW系列直线式气洗/水洗瓶机 Linear Bottle Air Flushing/ Water Washing Machine

产品描述 Product Description

本机可用于自动清洗各种材质圆柱形或标准规格玻璃、塑料瓶内外壁，冲洗完毕经洁净压缩空气初步吹干后送入输送带，适用于制药、食品、日化等行业清洗。

This machine can be used to automatically clean the inner and outer walls of cylindrical or standard-sized glass and plastic bottles of various materials. After rinsing, they are initially dried with clean compressed air and then sent to the conveyor belt. It's widely applied to pharmaceutical, food, daily chemical and other industries.



技术参数 Technical Parameters

型号 Model	AW-6	AW-8	AW-10	AW-12
洗瓶方式 Bottle washing method	气洗 Air washing	气洗、水洗 Air washing, water washing		
生产能力 Capacity	1000-1500瓶/小时 Bottles/hour	1500-2000瓶/小时 Bottles/hour	2500-3000瓶/小时 Bottles/hour	3500-4000瓶/小时 Bottles/hour
输送机速度 Conveyor speed	5-15米/分钟可调 5-15 m/min adjustable			
瓶直径 Bottle diameter	φ 50-85mm			
瓶高 Bottle height	65-150mm			
耗气量 Air consumption	0.3m ³ /min	0.3m ³ /min (气洗时)	0.3m ³ /min (气洗时)	0.4m ³ /min (气洗时)
耗水量 Water Consumption	/	1m ³ /小时 (水洗时)		
气源 Air pressure	0.5-0.8MPa			
电源电压 Voltage	AC220V 50Hz			
功率 Power	1KW	2KW	2KW	2KW

提升理盖机 Cap Elevator

产品描述 Product Description

提升理盖机可实现对盖子的自动上盖以及将瓶盖理顺，并依次送入滑道内，以备挂盖用。

The lifting capping machine can realize automatic capping and straightening of bottle caps, and send them into the slideway in sequence for hanging caps.



技术参数 Technical Parameters

型号 Model	TS-100
生产能力 Capacity	≤200 bottles/min
适应范围 Applicable range	φ 20-50mm (可定制 Customized)
瓶高 Bottle height	380V 50Hz/60Hz
功率 Power	0.37Kw



CONTACT US

振动盘理盖机 Cap Vibrator

产品描述 Product Description

本机可用于将盖子按照一定规律进行排列，并将其覆盖到相应的容器上，广泛应用于食品、日化、制药等行业中需要对容器进行封闭的生产线。

This machine can be used to arrange the lids in a certain pattern and cover them on the corresponding containers. It is widely used in production lines in the food, daily chemical, pharmaceutical and other industries where containers need to be closed.



技术参数 Technical Parameters

型号 Model	ZDP-100
振动盘直径 Vibrating plate diameter	300-800mm
生产能力 Capacity	≤100 bottles/min
瓶盖直径 Bottle diameter	φ 10-50mm (可定制 Customizable)
电压 Voltage	220V 50Hz/60Hz
功率 Power	0.3Kw

直线4轮搓盖机 Linear 4-wheel Spindle Screw Capping Machine

产品描述 Product Description

本机主要用于搓动或旋转盖子以完成密封或解开容器，适用于螺纹盖、泵头盖、鸭嘴盖的旋盖锁盖，广泛用于食品、医药、日化、农药、化妆品等行业不同瓶型的旋盖。

This machine is mainly used to rub or rotate the cap to complete the sealing or unlocking of the container. It is suitable for screwing and locking the threaded cap, pump head cap, duckbill cap, and is widely used for screwing caps of different bottle types in the food, medicine, daily chemical, pesticide, cosmetics and other industries. ern beverage and condiment manufacturers.



技术参数 Technical Parameters

型号 Model	CG-4
封瓶高度 Sealing height	38-300mm
盖径 Cover diameter	15-17mm
瓶径 Bottle diameter	35-80mm
生产速度 Production speed	30-40 bottles/min
电源 Voltage	AC 220V/50Hz
功率 Power	1.5KW
工作气压 Working pressure	0.3-0.5Mpa
外形尺寸 Dimensions	2000*700*1600mm
设备重量 Weight	200kg



CONTACT US

直线6轮搓盖机 Linear 6-wheel Screw Capping Machine

产品描述 Product Description

本机可自动提升理盖、挂盖、旋盖。采用夹瓶带夹持瓶子，同步运行挂盖与旋盖，运行中不倒瓶。结构简单、稳定性好，更换规格无需备件，仅作调整即可。

This machine can automatically lift, cap and screw caps. It uses a bottle clamping belt to hold bottles. The capping and screwing operations run synchronously, and the bottles will not tip over during operation. It has a simple structure and good stability. When changing specifications, no spare parts are needed. Only adjustments are required.



技术参数 Technical Parameters

型号 Model	CG-6
瓶子直径 Bottle diameter	30-150mm
瓶子高度 Bottle height	50-300mm
瓶盖直径 Bottle cap diameter	20-80mm(特殊规格可定做 Can be customized)
瓶盖高度 Cap height	10-60mm
生产速度 Production speed	≤120 bottles/min
电源 Voltage	220V 50/60Hz
功率 Power	1.5Kw
驱动方式 Drive mode	变频调速电机 Variable frequency speed motor

全自动星盘旋盖机 Fully Automatic Rotary Star Disk Capping Machine

产品描述 Product Description

本机通过星形转盘的运转，将瓶子或容器带入旋盖区域，并使用旋盖头对其进行自动旋紧。广泛应用于制药、食品、化妆品和化工等行业。

This machine brings bottles or containers into the capping area through the operation of the starshaped turntable and automatically tightens them with the capping head. It is widely used in the pharmaceutical, food, cosmetics and chemical industries.



技术参数 Technical Parameters

型号 Model	XC-100
瓶子直径 Bottle diameter	30-150mm
瓶子高度 Bottle height	根据需求定制 Customizable
瓶盖直径 Bottle cap diameter	20-120mm(特殊规格可定做 Can be customized)
瓶盖高度 Cap height	10-60mm
生产速度 Production speed	≤40-100 bottles/min
电源 Voltage	380/220V 50/60Hz
功率 Power	1.5Kw
设备尺寸	2000mm*1300mm*1500mm




CONTACT US

履带式压盖机 Crawler Type Press Capping Machine

产品描述 Product Description

本机通过履带斜坡角度原理，由履带自动将盖子压好压牢在瓶口上，广泛用于食品、制药、日化、农药、化工等行业。

This machine uses the principle of track slope angle to automatically press the cap firmly onto the bottle mouth. It is widely used in food, pharmaceutical, daily chemical, pesticide, chemical and other industries.

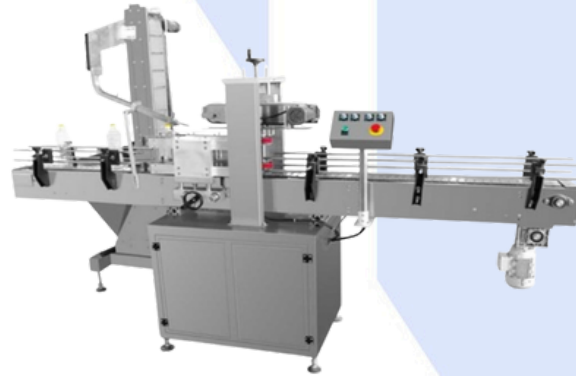

技术参数 Technical Parameters

型号 Model	YG-1
生产能力 Capacity	≤100 bottles/min
瓶盖直径 Bottle cap diameter	φ 20-50mm (可定制 Customizable)
瓶子直径 Bottle diameter	20-300mm 根据瓶子的直径定做输送带的宽度
瓶子高度 Bottle height	100-400mm
电压 Voltage	220V 50Hz/60Hz
功率 Power	0.3Kw

跟踪式旋盖机 Tracking Type Capping Machine

产品描述 Product Description

本机的旋盖装置能够实时跟踪瓶子的移动，当瓶子到达旋盖工位时，旋盖头准确地抓住瓶盖并进行旋转操作，将瓶盖旋紧在瓶口，适用于各种材质的圆瓶、扁瓶（壶）等不同形状的螺纹盖，能兼容一般圆盖、喷雾盖、泵头盖、鸭嘴盖等。适用于日化、食品、医药、化工等行业。

The capping device of this machine can track the movement of the bottle in real time. When the bottle reaches the capping station, the capping head accurately grasps the bottle cap and rotates it to tighten the bottle cap on the bottle mouth. It is suitable for round bottles, flat bottles (pots) and other threaded caps of various shapes made of various materials. It is compatible with general round caps, spray caps, pump head caps, duckbill caps, etc. It is suitable for daily chemical, food, medicine, chemical and other industries.



技术参数 Technical Parameters

型号 Model	GPTX-1	GPTX-2	GPTX-3
旋盖头数 Capping heads	1	2	3
适用瓶子直径/宽度 Applicable bottle diameter/width	50-150mm		
适用瓶子高度 Applicable bottle height	150-400mm		
适用瓶盖直径 Applicable bottle cap diameter	30-80mm		
适用瓶盖高度 Applicable bottle cap height	20-50mm		
生产速度 Production speed	25-30瓶/分钟 Bottles/minute	50-60瓶/分钟 Bottles/minute	70-90瓶/分钟 Bottles/minute
电源电压 Voltage	380V 50/60Hz		
功率 Power	6KW	10KW	14KW
主机重量 Weight	1200kg	2200kg	3300kg
外形尺寸 Dimensions	1800*1650*2450mm	2600*1650*2450mm	3500*1650*2450mm



CONTACT US

Multimagotrade.com
+40-758-667-671

蒸汽式真空旋盖机 Vacuum Tuist Capping Machine

产品描述 Product Description

本机使用蒸汽来创建真空，并通过密封容器来防止空气和湿气进入。广泛应用于食品加工、餐饮业、家庭厨房和实验室等领域。可以用于封水果罐头、调味酱、坚果、咖啡豆、粉末、药品等各种食品和物品。

The machine uses steam to create a vacuum and seals the container to prevent air and moisture from entering. It is used in food processing, catering, home kitchens and laboratories. It can be used to seal various foods and items such as canned fruits, sauces, nuts, coffee beans, powders, medicines, etc.



技术参数 Technical Parameters

型号 Model	ASC-200
旋盖速度 Capping speed	50-100 bottles/min
适用瓶型 Applicable bottle type	玻璃瓶 Glass Bottle
瓶子高度 Bottle height	50-200mm
瓶子直径 Bottle diameter	30-110mm
真空 Vacuum	-20-70Mpa
功率 Power	3Kw

直线式真空旋盖机 Linear Vacuum Capping Machine

产品描述 Product Description

直线式真空旋盖机是采用加热瓶盖产生负压的抽真空方式获取真空度。该设备自动化程度高，设备气动和电器元件均采用国际品牌，设备性能稳定可靠，适用于食品、饮料、调味品、保健品等行业中玻璃瓶三(四)旋马口铁盖的真空旋盖。

The linear vacuum capping machine uses a vacuum pumping method to generate negative pressure by heating the bottle cap to obtain the vacuum degree. The equipment has a high degree of automation, and the pneumatic and electrical components of the equipment are all international brands. The equipment has stable and reliable performance and is suitable for vacuum capping of three (four) screw tinplate caps for glass bottles in the food, beverage, condiment, health care products and other industries.



技术参数 Technical Parameters

型号 Model	ASV-200
生产能力 Capacity	35-65 bottles/min
瓶盖直径 Bottle diameter	35-65mm (可定制 Customizable)
瓶高 Bottle height	70-260mm
瓶径 Bottle diameter	40-85mm
电压 Voltage	220V/380V 50Hz/60Hz
功率 Power	2KW



CONTACT US

风冷式铝箔封口机 Air Cool Aluminum Induction Foil Sealing Machine

产品描述 Product Description

本机是利用电磁感应原理达到密闭铝箔与瓶口的粘合，利用高速冷风对封口处进行快速冷却，确保封口后的铝箔包装迅速固化并达到理想的密封效果。主要适用于带有螺纹的塑料、玻璃等非金属瓶瓶口封口作业，广泛用于医药、农药、化工、食品、饮料、保健品、化妆品等行业。

This machine achieves the adhesion between the sealed aluminum foil and the bottle mouth by utilizing the principle of electromagnetic induction. It uses high-speed cold air to rapidly cool the sealing area to ensure that the aluminum foil packaging after sealing is quickly solidified and achieves an ideal sealing effect. It is mainly suitable for sealing the bottle mouths of non-metallic bottles such as plastic and glass with threads, and is widely used in industries such as medicine, pesticides, chemicals, food, beverages, health products, cosmetics, etc.



技术参数 Technical Parameters

型号 Model	AS-2000A
封口直径 Sealing diameter	Φ30 ~ Φ90mm (特殊口径可按要求订做 Special diameters can be customized upon request)
封口速度 Sealing speed	180瓶/分钟 Bottles/min (以Φ30mmPE瓶为例 Take Φ30mm PE bottle as an example)
离地升降调节 Height adjustable rang	760 ~ 1260mm (可根据需求定做 Can be customized according to demand)
电源电压 Voltage	220V 50/60Hz
输出功率 Power	3KW max (功率可调 Power adjustable)
主机重量 Weight	净重 net weight72kg 毛重 Gross Weight90kg
主机尺寸 Size	800*450*210mm

水冷式铝箔封口机 Water Cool Aluminum Induction Foil Sealing Machine

产品描述 Product Description

本机是利用电磁感应原理达到密闭铝箔与瓶口的粘合，通过循环水冷却封口部位，确保封口后的铝箔包装迅速固化并达到理想的密封效果。主要适用于带有螺纹的塑料、玻璃等非金属瓶瓶口封口作业，特别适合对封口温度敏感的产品，广泛用于医药、农药、化工、食品、饮料、保健品、化妆品等行业。

This machine achieves the adhesion between the sealed aluminum foil and the bottle mouth by utilizing the principle of electromagnetic induction. It cools the sealing part through circulating water to ensure that the aluminum foil packaging after sealing is quickly solidified and achieves an ideal sealing effect. It is mainly suitable for sealing the bottle mouths of non-metallic bottles such as plastic and glass with threads. It is especially suitable for products sensitive to sealing temperature and is widely used in industries such as medicine, pesticides, chemicals, food, beverages, health products, cosmetics, etc.



技术参数 Technical Parameters

型号 Model	AS-6000A
封口直径 Sealing diameter	Φ30 ~ Φ90mm (特殊口径可按要求订做 Special diameters can be customized upon request)
封口速度 Sealing speed	180瓶/分钟 Bottles/min (以Φ30mmPE瓶为例 Take Φ30mm PE bottle as an example)
离地升降调节 Height adjustable rang	760 ~ 1260mm (可根据需求定做 Can be customized according to demand)
电源电压 Voltage	220V 50/60Hz
输出功率 Power	3KW max (功率可调 Power adjustable)
主机重量 Host weight	净重 net weight72kg 毛重 Gross Weight90kg
主机尺寸 Host size	800*450*210mm



CONTACT US




MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671

Intelligent Filling Production Line


We can provide complete set of intelligent filling production lines, Include filling machine, capping machine, labeling machine, coding machine, aluminum foil sealing machine, carton erector, carton packer, carton sealer, palletizer, and storage. Customer can choose different production equipment according to different products and capacity.

Daily Chemicals Product Filling Line

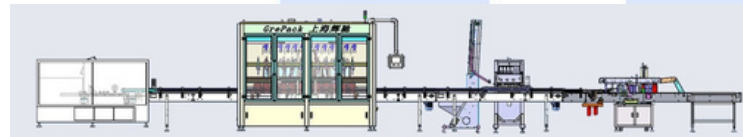


High speed bottle unscrambler Filling machine Capping machine Labeling machine Packing platform

Edible oil Filling Line

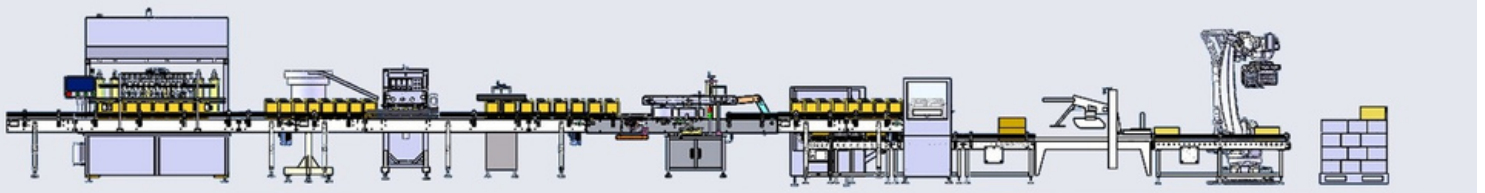

Filling machine Capping machine Aluminum foil sealing machine Labeling machine Unpacking and packing machine Sealing machine Palletizing robot

Sauce/Cream Filling Line

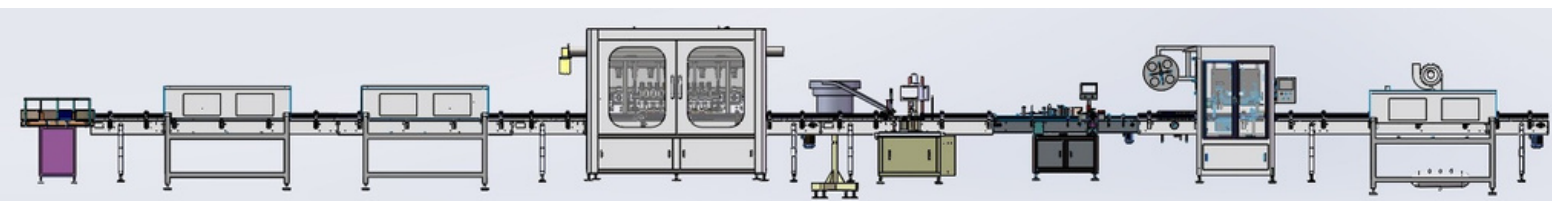

Bottle unscrambler Bottle washing machine Bottle dryer Filling machine Star disk capping machine Labeling machine Sleeve shrink labeling machine Shrink tunnel



CONTACT US

Multimagotrade.com
+40-758-667-671




MULTIMAGO
TRADE


Multimagotrade.com
+40-758-667-671

Intelligent Filling Production Line

Liquid Filling Line

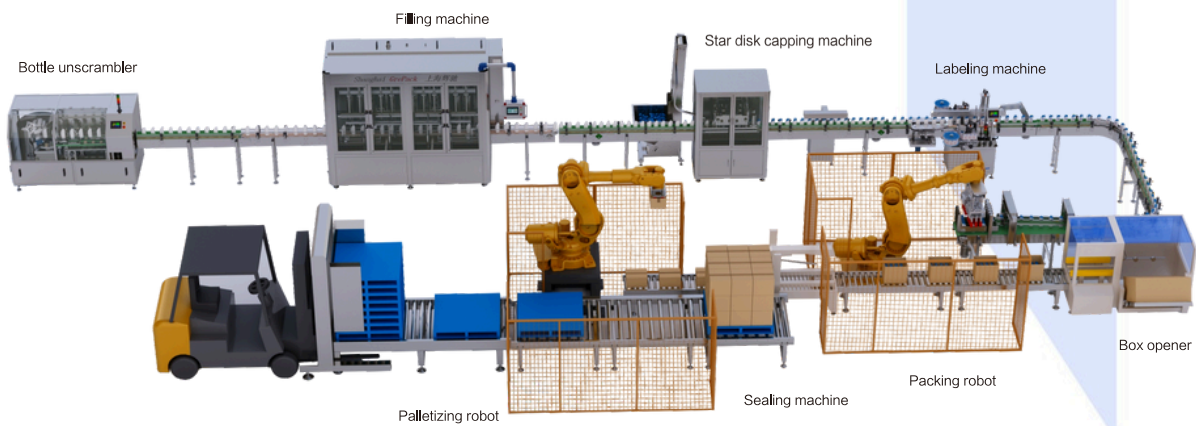

Paint Filling Line

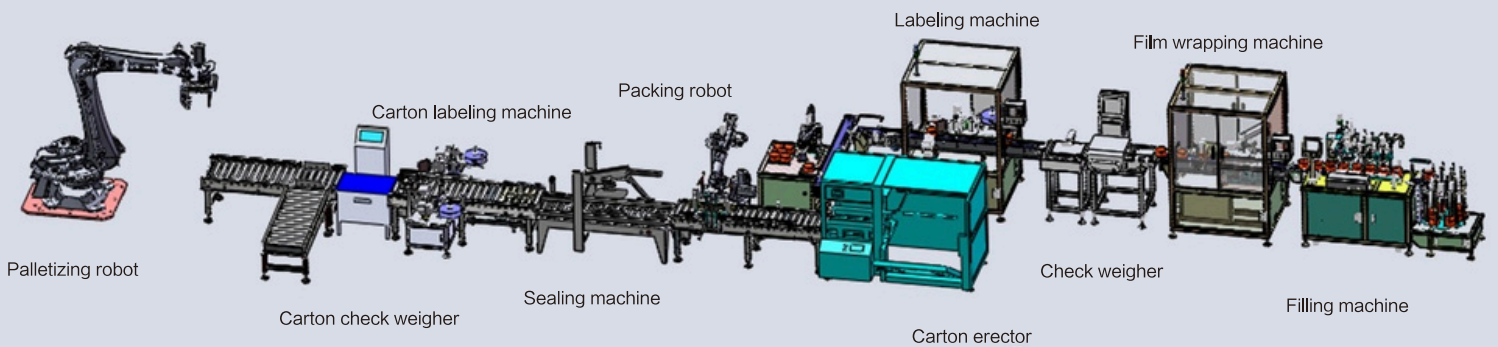

CONTACT US

Multimagotrade.com
+40-758-667-671



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671

INTELLIGENT POUCH PACKING MACHINE

- Horizontal Form Fill Seal Flat Pouch Packing Machine
- Horizontal Form Fill Seal Zipper Doypack Packing Machine
- Horizontal Form Fill Seal Spout Doypack Packing Machine
- Duplex Horizontal Form Fill Seal Shaped Doypack Packing Machine
- Horizontal Premade Pouch Packing Machine
- Rotary Premade Pouch Packing Machine
- Automatic Vertical Packing Machine



CONTACT US


Multimagotrade.com
+40-758-667-671

HC-110 水平式卷膜包装机 Horizontal Form Fill Seal Flat Pouch Packing Machine


产品描述 Product Description

本机可实现三边封、四边封袋型，适合粉剂、颗粒、液体、膏体、固体物等各种物料包装需求。
This machine can realize three-side sealing and four-side sealing bags, which is suitable for packaging various materials such as powders, granules, liquids, pastes, solids, etc.

包装原理图 Packaging elements drawing

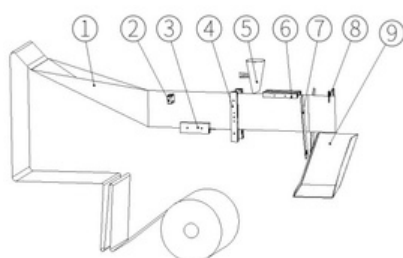

- 1、膜成型/Bag forming
- 2、定位色标/Photo cell
- 3、底封/Bottom seal
- 4、竖封/Vertical seal
- 5、充填/Filling
- 6、顶封/Heat top seal
- 7、剪切/Cutting
- 8、牵袋/Pouch pulling
- 9、成品输出/Outlet

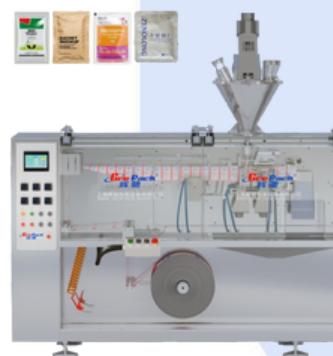

技术参数 Technical Parameters


机型 Model	袋型 Type of Pouch		最小袋 Min. pouch size	最大袋 Max. pouch size	包装速度 Packing speed	包装容量 Packing range
HC-110	三边封/四边封 3/4 side seal		50 × 50mm	110 × 130mm	< 60袋/分钟 pouch per min.	max 60ml
下料工位 Filling station	主机功率 Power	电源要求 Volt	耗气量 Air consumption	工作气压 Air pressure	主机重量 Machine weight	设备尺寸 Machine dimension
1个	2.5KW	380V 3P 50Hz.	400L/min.	0.7 Mpa.	550kg	2060 × 750 × 1330mm

HC-110L 水平式卷膜连袋包装机 Horizontal Form Fill Seal Linked Pouch Packing Machine

产品描述 Product Description

本机可实现三边封、四边封连袋袋型，适合粉剂、颗粒、液体、膏体、固体物等各种物料包装需求。
This machine can realize three-side sealing and four-side sealing continuous bag types, which is suitable for packaging needs of various materials such as powder, granule, liquid, paste, solid, etc.

包装原理图 Packaging elements drawing

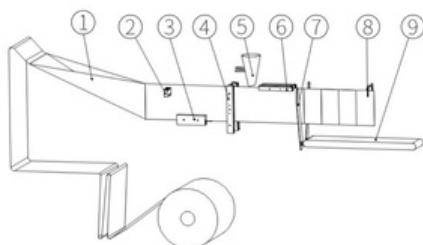

- 1、膜成型/Bag forming
- 2、定位色标/Photo cell
- 3、底封/Bottom seal
- 4、竖封/Vertical seal
- 5、充填/Filling
- 6、顶封/Heat top seal
- 7、剪切/Cutting
- 8、牵袋/Pouch pulling
- 9、成品输出/Outlet



技术参数 Technical Parameters

机型 Model	袋型 Type of Pouch		最小袋 Min. pouch size	最大袋 Max. pouch size	包装速度 Packing speed	包装容量 Packing range
HC-110L	三边封/四边封 3/4 side seal		50 × 50mm	110 × 130mm	< 60袋/分钟 pouch per min.	max 60ml
下料工位 Filling station	主机功率 Power	电源要求 Volt	耗气量 Air consumption	工作气压 Air pressure	主机重量 Machine weight	设备尺寸 Machine dimension
1个	2.5KW	380V 3P 50Hz.	400L/min.	0.7 Mpa.	550kg	2060 × 750 × 1330mm



CONTACT US


HC-130 水平式卷膜包装机 Horizontal Form Fill Seal Flat Pouch Packing Machine

产品描述 Product Description

本机可实现三边封、四边封的袋型，适合粉剂、颗粒、液体、膏体、固体物等各种物料包装需求。

This machine can realize three-side sealed and four-side sealed bags, which is suitable for packaging various materials such as powders, granules, liquids, pastes, solids, etc.

包装原理图 Packaging elements drawing

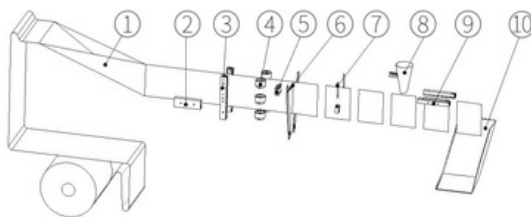

- | | | | |
|--------------------|----------------------|--------------------|----------------|
| 1、膜成型/Bag forming | 4、伺服牵引/Servo advance | 7、开袋/Pouch opening | 10、成品输出/Outlet |
| 2、底封/Bottom seal | 5、定位色标/Photo cell | 8、充填/Filling | |
| 3、竖封/Vertical seal | 6、剪切/Cutting | 9、顶封/Heat top seal | |



技术参数 Technical Parameters

机型 Model	袋型 Type of Pouch	最小袋 Min. pouch size	最大袋 Max. pouch size	包装速度 Packing speed	包装容量 Packing range	
HC-130	三边封/四边封 3/4 side seal	50 × 75mm	130 × 180mm	< 60袋/分钟 pouch per min.	200ml	
下料工位 Filling station	主机功率 Power	电源要求 Volt	耗气量 Air consumption	工作气压 Air pressure	主机重量 Machine weight	设备尺寸 Machine dimension
1个	5KW	380V 3P 50Hz.	300L/min.	0.6 Mpa.	800kg	2850 × 1000 × 1450mm


HC-180 水平式卷膜包装机 Horizontal Form Fill Seal Flat Pouch Packing Machine

产品描述 Product Description

本机可实现三边封、四边封的袋型，适合粉剂、颗粒、液体、膏体、固体物等各种物料包装需求。

This machine can realize three-side sealed and four-side sealed bags, which is suitable for packaging various materials such as powders, granules, liquids, pastes, solids, etc.

包装原理图 Packaging elements drawing

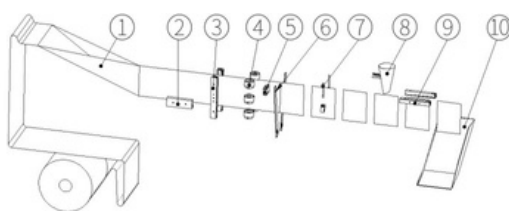

- | | | | |
|--------------------|----------------------|--------------------|----------------|
| 1、膜成型/Bag forming | 4、伺服牵引/Servo advance | 7、开袋/Pouch opening | 10、成品输出/Outlet |
| 2、底封/Bottom seal | 5、定位色标/Photo cell | 8、充填/Filling | |
| 3、竖封/Vertical seal | 6、剪切/Cutting | 9、顶封/Heat top seal | |



技术参数 Technical Parameters

机型 Model	袋型 Type of Pouch	最小袋 Min. pouch size	最大袋 Max. pouch size	包装速度 Packing speed	包装容量 Packing range	
HC-180	三边封/四边封 3/4 side seal	60 × 75mm	180 × 210mm	< 60袋/分钟 pouch per min.	400ml	
下料工位 Filling station	主机功率 Power	电源要求 Volt	耗气量 Air consumption	工作气压 Air pressure	主机重量 Machine weight	设备尺寸 Machine dimension
2个	5KW	380V 3P 50Hz.	300L/min.	0.6 Mpa.	1400kg	3350 × 1000 × 1450mm



CONTACT US


HC-130 水平式卷膜包装机 Horizontal Form Fill Seal Flat Pouch Packing Machine

产品描述 Product Description


本机可实现三边封、四边封的袋型，适合粉剂、颗粒、液体、膏体、固体物等各种物料包装需求。

This machine can realize three-side sealed and four-side sealed bags, which is suitable for packaging various materials such as powders, granules, liquids, pastes, solids, etc.

包装原理图 Packaging elements drawing

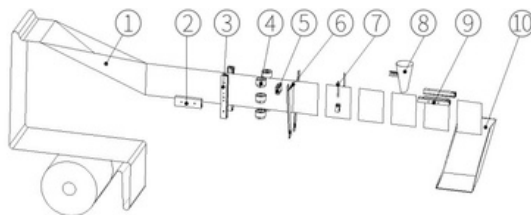

- | | | | |
|--------------------|----------------------|--------------------|----------------|
| 1、膜成型/Bag forming | 4、伺服牵引/Servo advance | 7、开袋/Pouch opening | 10、成品输出/Outlet |
| 2、底封/Bottom seal | 5、定位色标/Photo cell | 8、充填/Filling | |
| 3、竖封/Vertical seal | 6、剪切/Cutting | 9、顶封/Heat top seal | |

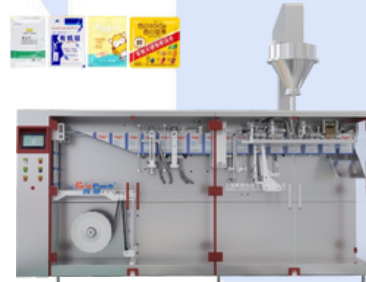

技术参数 Technical Parameters

机型 Model	袋型 Type of Pouch		最小袋 Min. pouch size	最大袋 Max. pouch size	包装速度 Packing speed	包装容量 Packing range
HC-130	三边封/四边封 3/4 side seal		50 × 75mm	130 × 180mm	<60袋/分钟 pouch per min.	200ml
下料工位 Filling station	主机功率 Power	电源要求 Volt	耗气量 Air consumption	工作气压 Air pressure	主机重量 Machine weight	设备尺寸 Machine dimension
1个	5KW	380V 3P 50Hz.	300L/min.	0.6 Mpa.	800kg	2850 × 1000 × 1450mm


HC-180 水平式卷膜包装机 Horizontal Form Fill Seal Flat Pouch Packing Machine

产品描述 Product Description

本机可实现三边封、四边封的袋型，适合粉剂、颗粒、液体、膏体、固体物等各种物料包装需求。

This machine can realize three-side sealed and four-side sealed bags, which is suitable for packaging various materials such as powders, granules, liquids, pastes, solids, etc.

包装原理图 Packaging elements drawing

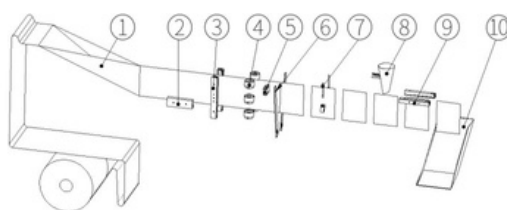

- | | | | |
|--------------------|----------------------|--------------------|----------------|
| 1、膜成型/Bag forming | 4、伺服牵引/Servo advance | 7、开袋/Pouch opening | 10、成品输出/Outlet |
| 2、底封/Bottom seal | 5、定位色标/Photo cell | 8、充填/Filling | |
| 3、竖封/Vertical seal | 6、剪切/Cutting | 9、顶封/Heat top seal | |



技术参数 Technical Parameters


机型 Model	袋型 Type of Pouch		最小袋 Min. pouch size	最大袋 Max. pouch size	包装速度 Packing speed	包装容量 Packing range
HC-180	三边封/四边封 3/4 side seal		60 × 75mm	180 × 210mm	<60袋/分钟 pouch per min.	400ml
下料工位 Filling station	主机功率 Power	电源要求 Volt	耗气量 Air consumption	工作气压 Air pressure	主机重量 Machine weight	设备尺寸 Machine dimension
2个	5KW	380V 3P 50Hz.	300L/min.	0.6 Mpa.	1400kg	3350 × 1000 × 1450mm



CONTACT US

HC-180SDY 水平卷膜自立异形袋包装机

Duplex Horizontal Form Fill Seal Shaped Doypack Packing Machine

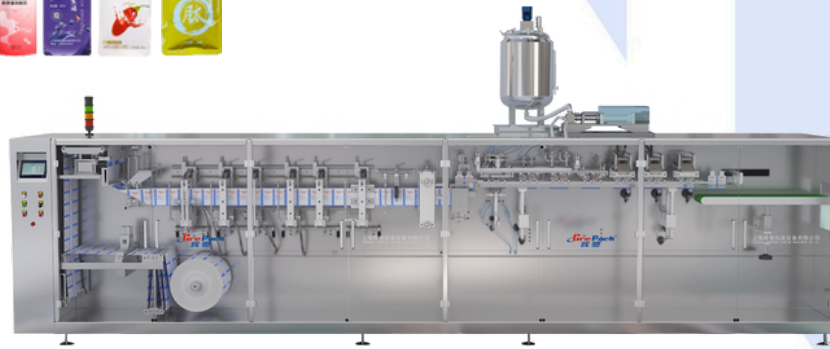


产品描述 Product Description

本机为自动卷膜制袋成型，可根据客户需求定制3/4边封平袋、自立袋、异形袋等袋型，适用于功能饮料、酵素原浆、保健饮品、益生菌乳品、膏体、酱体类等物料的全自动包装。特别适用于食品、大健康、医药行业的异形袋产品的自动化生产项目。

This machine is an automatic film roll bag making machine. It can customize 3/4 side seal flat bags, stand-up bags, special-shaped bags and other bag types according to customer needs. It is suitable for fully automatic packaging of functional beverages, enzyme purees, health drinks, probiotic dairy products, pastes, sauces and other materials. It is especially suitable for the automated production of special-shaped bag products in the food, health and pharmaceutical industries.

包装原理图 Packaging elements drawing

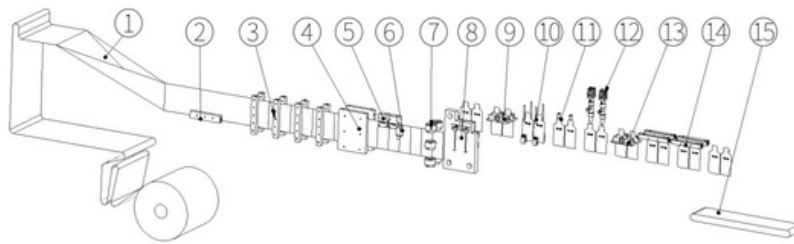

- 1、膜成型/Bag forming
- 2、底封/Bottom seal
- 3、竖封/Vertical seal
- 4、冷却/Cooling
- 5、冲白边/Cutting
- 6、定位色标/Photo cell
- 7、伺服牵引/Servo advance
- 8、冲型/Mould cutting
- 9、牵袋/Pulling
- 10、开袋/Pouch opening
- 11、打袋/Pouch
- 12、充填/Filling
- 13、展袋/Pouch stretch
- 14、顶封/Heat top seal
- 15、成品输出/Outlet

技术参数 Technical Parameters

机型 Model	HC-180SDY
袋型 Type of Pouch	异形自立袋 Shaped Doypack Pouch
最小袋 Min. pouch size	60*120mm
最大袋 Max. pouch size	90*170mm
包装速度 Packing speed	70-90包/分钟 Pouch / min(根据实际物料)
包装容量 Packing range	30-60ml(最大)(max.)
下料工位 Packing station	2
主机功率 Power	8KW
电源要求 Volt	AC380V、50Hz.
耗气量 Air consumption	400L/min.
工作气压 Air Pressure	0.6-0.7Mpa.
主机重量 Machine weight	2500kg
设备尺寸 Machine dimension	6100mm × 1000mm × 2100mm



CONTACT US

Multimagotrade.com
+40-758-667-671

HC-180S/240S 水平卷膜自立袋包装机

Horizontal Form Fill Seal Doypack Packing Machine




产品描述 Product Description

本机可包装物料有液体、粉剂、颗粒、膏体、酱料等各种物料，袋形是普通自立袋，异形袋，挂孔袋，拉链袋，主要适用于食品、日化、医药、农化等行业。

This machine can package various materials including liquids, powders, granules, pastes, sauces, etc. The bag shapes are ordinary stand-up bags, special-shaped bags, hanging hole bags, zipper bags, etc. It is mainly suitable for food, daily chemicals, medicine, agrochemicals and other industries.

包装原理图 Packaging elements drawing

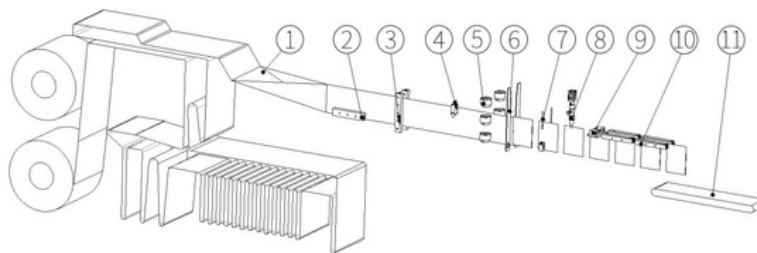

- 1、膜成型/Bag forming
- 2、底封/Bottom seal
- 3、竖封/Vertical seal
- 4、定位色标/Photo cell
- 5、伺服牵引/Servo advance
- 6、剪切/Cutting
- 7、开袋/Pouch opening
- 8、充填/Filling
- 9、展袋/Pouch stretch
- 10、顶封/Heat top seal
- 11、成品输出/Outlet

技术参数 Technical Parameters

机型 Model	HC-180S	HC-240S
袋型 Type of Pouch	自立袋、异形自立袋、挂孔袋 Doypack, Shape, Hanging Hole Pouch	
最小袋 Min. pouch size	70*100mm	120*130mm
最大袋 Max. pouch size	180*250mm	240*320mm
包装速度 Packing speed	30-50ppm(双工模式100PPM duplex model 100PPM)	
包装容量 Packing range	≤1200ml	≤2000ml
下料工位 Packing station	1	1
主机功率 Power	8KW	10KW
电源要求 Volt	380V 3P 50Hz.	
耗气量 Air consumption	200L/min	300L/min.
工作气压 Air Pressure	0.7MPa.	0.8MPa.
主机重量 Machine weight	2300kg	2800kg
设备尺寸 Machine dimension	6450*1100*1400mm	7500*1250*2000mm



CONTACT US

Multimagotrade.com
+40-758-667-671

HC-180SZ/240SZ 水平拉链自立袋卷膜包装机


Horizontal Form Fill Seal Zipper Doypack Packing Machine



产品描述 Product Description

本机是专为拉链袋需求而设计的，还可同时增加特殊功能，如：挂孔、异形等。适用于液体、粉剂、颗粒、膏体、酱料等各种物料包装。This machine is specially designed for zipper bags, and can also add special functions, such as hanging holes, special shapes, etc. It is suitable for packaging various materials such as liquids, powders, granules, pastes, sauces, etc.

包装原理图 Packaging elements drawing

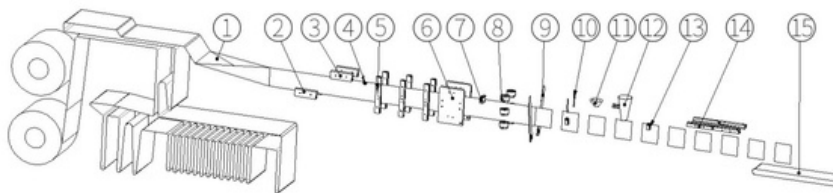

- 1、膜成型/Bag forming
- 2、底封/Bottom seal
- 3、封拉链/Sealing zipper
- 4、开拉链/Open zipper
- 5、竖封/Vertical seal
- 6、冷却/Cooling
- 7、定位色标/Photo cell
- 8、伺服牵引/Servo advance
- 9、剪切/Cutting
- 10、开袋/Pouch opening
- 11、吹气/Air flushing
- 12、充填/Filling
- 13、展袋/Pouch stretch
- 14、顶封/Heat top seal
- 15、成品输出/Outlet

技术参数 Technical Parameters

机型 Model	HC-180SZ	HC-240SZ
袋型 Type of Pouch	自立袋加拉链 Zip Stand Pouch	
最小袋 Min. pouch size	70*100mm	100 × 120mm
最大袋 Max. pouch size	180*250mm	240 × 320mm
包装速度 Packing speed	< 50袋/分钟 < 50 Pouch per min.	
包装容量 Packing range	≤ 1000ml	≤ 2000ml
下料工位 Packing station	1	1
主机功率 Power	10KW	12kw
电源要求 Volt	380V 3P 50Hz.	
耗气量 Air consumption	400L/min	500L/Min.
工作气压 Air Pressure	0.7MPa.	0.8MPa.
主机重量 Machine weight	2500kg	2800kg
设备尺寸 Machine dimension	7200 × 1500 × 2000mm	7500 × 1250 × 2000mm



CONTACT US

Multimagotrade.com
+40-758-667-671

HC-180SPZ/240SPZ 水平式直嘴自立袋卷膜包装机

Horizontal Form Fill Seal Top Spout Doypack Packing Machine




产品描述 Product Description

本机可实现直吸嘴袋包装需求，也可加挂孔，异形，拉链，吸嘴等功能，实现了自动成袋，自动灌装，自动加嘴，自动焊嘴，自动封口。应用于食盐，润滑油，饮料，果汁，酸奶，酱料，食用油，洗护系列等包装。

This machine can realize the packaging needs of straight nozzle bags, and can also add hanging holes, special shapes, zippers, nozzles and other functions, realizing automatic bagging, automatic filling, automatic nozzle addition, automatic nozzle welding, and automatic sealing. It is used in the packaging of salt, lubricating oil, beverages, juice, yogurt, sauces, edible oil, and cleaning series.

包装原理图 Packaging elements drawing

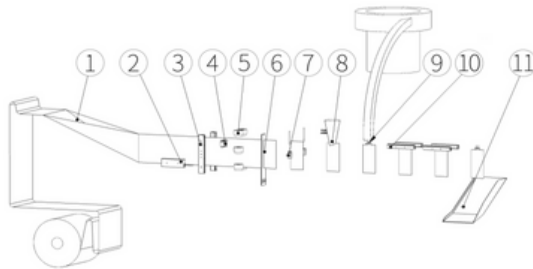

- 1、膜成型/Bag forming
- 2、底封/Bottom seal
- 3、竖封/Vertical seal
- 4、定位色标/Photo cell
- 5、伺服牵引/Servo advance
- 6、剪切/Cutting
- 7、开袋/Pouch opening
- 8、充填/Filling
- 9、加嘴/Insert top
- 10、顶封/Heat top seal
- 11、成品输出/Outlet

技术参数 Technical Parameters

机型 Model	HC-180SPZ	HC-240SPZ
袋型 Type of Pouch	自立直嘴袋 Top Spouted Stand Pouch	
最小袋 Min. pouch size	70 × 100mm	120 × 130mm
最大袋 Max. pouch size	180 × 250mm	240 × 320mm
包装速度 Packing speed	< 50袋/分钟 < 50 Pouch per min.	
包装容量 Packing range	max 1000ml	max 2000ml
下料工位 Packing station	2	2
主机功率 Power	10KW	12.5KW
电源要求 Volt	380V 3P 50Hz.	
耗气量 Air consumption	400L/Min.	500L/min.
工作气压 Air Pressure	0.7MPa.	0.8MPa.
主机重量 Machine weight	3000kg	3500kg
设备尺寸 Machine dimension	7500 × 1500 × 2000mm	8700*1450*2000mm




CONTACT US

Multimagotrade.com
+40-758-667-671

HC-180SP/240SP 水平式斜嘴自立袋卷膜包装机

Horizontal Form Fill Seal Corner Spout Doypack Packing Machine

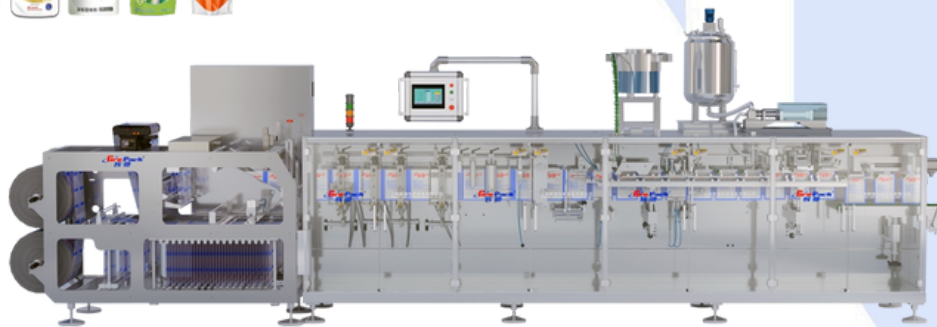


产品描述 Product Description

本机可实现斜嘴袋包装需求，也可加挂孔，异形，拉链，吸嘴，吸嘴等功能，实现了自动成袋，自动灌装，自动加嘴，自动焊嘴，自动封口。应用于食盐，润滑油，饮料，果汁，酸奶，酱料，食用油，洗护系列等包装。

This machine can realize the packaging needs of oblique suction nozzle bags, and can also add hanging holes, special shapes, zippers, suction nozzles and other functions, realizing automatic bagging, automatic filling, automatic nozzle addition, automatic nozzle welding, and automatic sealing. It is used in the packaging of salt, lubricating oil, beverages, juice, yogurt, sauces, edible oil, and cleaning series.

包装原理图 Packaging elements drawing

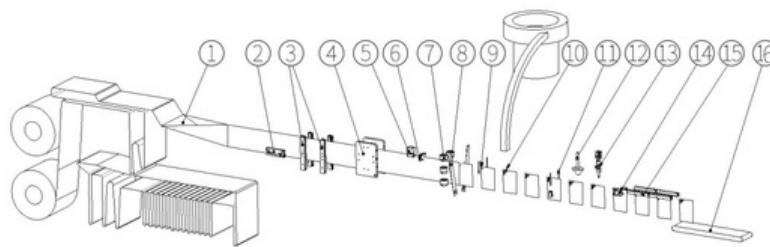

- 1、膜成型/Bag forming
- 2、底封/Bottom seal
- 3、竖封/Vertical seal
- 4、冷却/Cooling
- 5、冲斜角/Corner
- 6、定位色标/Photo cell
- 7、伺服牵引/Servo advance
- 8、剪切/Cutting
- 9、开口/Pouch open
- 10、加斜嘴/Insert corner
- 11、开袋/Pouch opening
- 12、吹气/Air flushing
- 13、充填/Filling
- 14、展袋/Pouch stretch
- 15、顶封/Heat top seal
- 16、成品输出/Outlet

技术参数 Technical Parameters

机型 Model	HC-180SP	HC-240SP
袋型 Type of Pouch	自立斜嘴袋 Corner Spouted Stand Pouch	
最小袋 Min. pouch size	90 × 120mm	120 × 160mm
最大袋 Max. pouch size	180 × 250mm	240 × 320mm
包装速度 Packing speed	< 50袋/分钟 < 50 Pouch per min.	
包装容量 Packing range	max 1000ml	max 2000ml
下料工位 Packing station	2	2
主机功率 Power	10KW	15kw
电源要求 Volt	380V 3P 50Hz.	
耗气量 Air consumption	400L/min.	500L/Min.
工作气压 Air Pressure	0.7MPa.	0.7MPa.
主机重量 Machine weight	3000kg	3500kg
设备尺寸 Machine dimension	7500 × 1500 × 1500mm	9000 × 1500 × 1500mm




CONTACT US

Multimagotrade.com
+40-758-667-671

HC-360S 水平式自立袋四出包装机


Quadruple Horizontal Form Fill Seal Flat Pouch Packing Machine

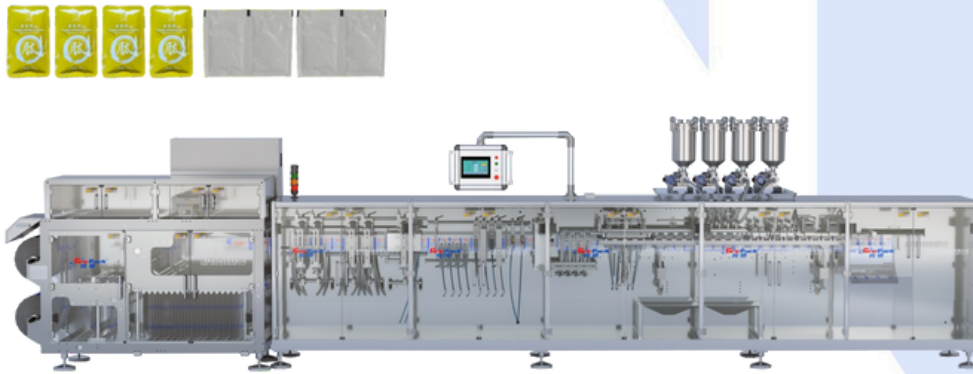

产品描述 Product Description

本机为小袋高速包装机，四工位同步灌装，可实现三边封、四边封、双联袋、自立袋等袋形，满足客户的不同需求。
This machine is a small bag high-speed packaging machine with four-station synchronous filling. It can realize bag shapes such as three-side seal, four-side seal, double-link bag, self-supporting bag, etc. to meet the different needs of customers.

包装原理图 Packaging elements drawing

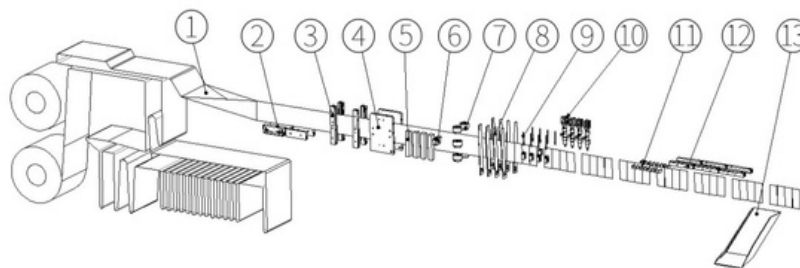

- 1、膜成型/Bag forming
- 2、底封/Bottom seal
- 3、竖封/Vertical seal
- 4、冷却/Cooling
- 5、冲孔/Hole punching
- 6、定位色标/Photo cell
- 7、伺服牵引/Servo advance
- 8、剪切/Cutting
- 9、开袋/Pouch opening
- 10、充填/Filling
- 11、展袋/Pouch stretch
- 12、顶封/Heat top seal
- 13、成品输出/Outlet

技术参数 Technical Parameters

机型 Model	HC-360S
袋型 Type of Pouch	自立/平袋四出袋 doypack stand-pouch/flat pouch
最小袋 Min. pouch size	50 × 110mm
最大袋 Max. pouch size	90 × 220mm
包装速度 Packing speed	< 200袋/分钟 pouch per min.
包装容量 Packing range	max 100ml
下料工位 Packing station	4
主机功率 Power	16KW
电源要求 Volt	380V 3P 50Hz.
耗气量 Air consumption	600L/min.
工作气压 Air Pressure	0.7MPa.
主机重量 Machine weight	3000kg
设备尺寸 Machine dimension	9200 × 1500 × 2000mm



CONTACT US


Multimagotrade.com
+40-758-667-671

HC-180G 预制袋包装机 Horizontal Premade Pouch Packing Machine

产品描述 Product Description

本机可实现三边封、四边封、挂孔袋、自立袋、异形袋等袋型的包装，适合粉剂、颗粒、液体、膏体、固体物等物料包装需求。
This machine can realize the packaging of three-side seal, four-side seal, hanging hole bag, self-supporting bag, special-shaped bag and other bag types, which is suitable for the packaging needs of powders, granules, liquids, pastes, solids and other materials.

包装原理图 Packaging elements drawing

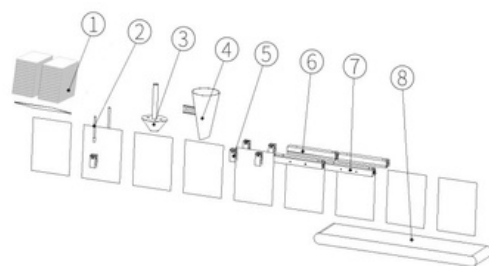

- 1、给袋/Bag feeding
- 2、开袋/Pouch opening
- 3、吹气/Air flushing
- 4、充填/Filling
- 5、展袋/Pouch stretch
- 6、顶封/Heat top seal
- 7、冷封/Cool sealing
- 8、成品输出/Out let



技术参数 Technical Parameters


机型 Model	袋型 Type of Pouch	最小袋 Min. pouch size	最大袋 Max. pouch size	包装速度 Packing speed	包装容量 Packing range	
HC-180G	三边封/四边封/自立袋/背封袋 3/4 side seal, doypack, standup pouch, back seal	70 × 75mm	180 × 225mm	<60袋/分钟 pouch per min.	max. 500ml	
下料工位 Filling station	主机功率 Power	电源要求 Volt	耗气量 Air consumption	工作气压 Air pressure	主机重量 Machine weight	设备尺寸 Machine dimension
1个	2KW	380V 3P 50Hz.	300L/min.	0.6-0.8 Mpa	1000kg	2160 × 1000 × 1400mm

HC-210G 预制袋包装机 Horizontal Premade Pouch Packing Machine

产品描述 Product Description

本机可实现三边封、四边封、挂孔袋、自立袋、异形袋等袋型的包装，适合粉剂、颗粒、液体、膏体、固体物等各种包装需求。
This machine can realize the packaging of three-side seal, four-side seal, hanging hole bag, self-supporting bag, special-shaped bag and other bag types, suitable for various packaging needs such as powder, granule, liquid, paste, solid and so on.

包装原理图 Packaging elements drawing

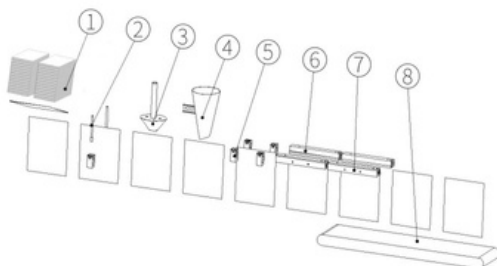

- 1、给袋/Bag feeding
- 2、开袋/Pouch opening
- 3、吹气/Air flushing
- 4、充填/Filling
- 5、展袋/Pouch stretch
- 6、顶封/Heat top seal
- 7、冷封/Cool sealing
- 8、成品输出/Out let



技术参数 Technical Parameters


机型 Model	袋型 Type of Pouch	最小袋 Min. pouch size	最大袋 Max. pouch size	包装速度 Packing speed	包装容量 Packing range	
HC-210G	三边封/四边封/自立袋 3/4 side seal/ stand pouch	100 × 120mm	220 × 300mm	<60袋/分钟 pouch per min.	max. 1000ml	
下料工位 Filling station	主机功率 Power	电源要求 Volt	耗气量 Air consumption	工作气压 Air pressure	主机重量 Machine weight	设备尺寸 Machine dimension
2个	3.5KW	380V 3P 50Hz.	300L/min.	0.7MPa.	1000kg	2600 × 1000 × 1300mm



CONTACT US

HC-180GD 双出水平预制袋包装机


Duplex Horizontal Premade Pouch Packing Machine

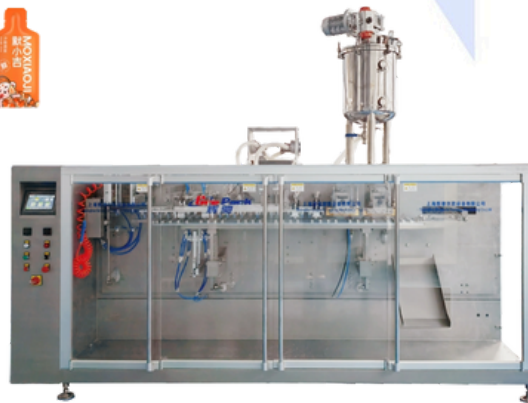

产品描述 Product Description

本机可实现平袋、自立袋和异形袋的包装，适合粉剂、颗粒、液体、膏体、固体物等物料包装需求。
This machine can realize the packaging of flat bags, stand-up bags and special-shaped bags, and is suitable for the packaging needs of powders, granules, liquids, pastes, solids and other materials.

包装原理图 Packaging elements drawing

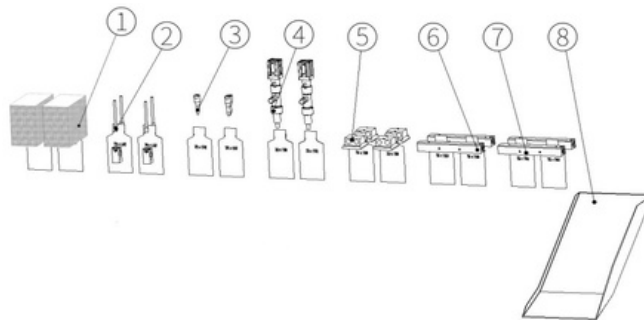

- 1、给袋/Bag feeding
- 2、开袋/Pouch opening
- 3、吹气/Air flushing
- 4、充填/Filling
- 5、展袋/Pouch stretch
- 6、顶封/Heat top seal
- 7、冷封/Cool sealing
- 8、成品输出/Out let

技术参数 Technical Parameters

机型 Model	HC-180GD
袋型 Type of Pouch	三边封/四边封/自立袋 3 or 4 side seal, standup pouch/doypack pouch
最小袋 Min. pouch size	65 × 130mm
最大袋 Max. pouch size	95 × 180mm
包装速度 Packing speed	60-80pouch per min.
包装容量 Packing range	≤100ml
下料工位 Packing station	2
主机功率 Power	5kw
电源要求 Volt	380V 3phase 50Hz
耗气量 Air consumption	450L/min
工作气压 Air Pressure	0.6MPa
主机重量 Machine weight	1500kg
设备尺寸 Machine dimension	3140 × 1000 × 1400mm



CONTACT US

Multimagotrade.com
+40-758-667-671

HC-240GT/280GT 称重水平式给袋包装机

Horizontal Premade Pouch Weighing Type Packing Machine




产品描述 Product Description

本机可实现三边封、四边封、挂孔袋、自立袋、异形袋，拉链袋等，适用于粉剂、颗粒、液体、膏体、固体物等物料包装需求，也可根据客户需求定制。

This machine can realize three-side sealing, four-side sealing, hanging hole bags, self-supporting bags, special-shaped bags, zipper bags, etc. It is suitable for packaging needs of powders, granules, liquids, pastes, solids and other materials, and can also be customized according to customer needs.

包装原理图 Packaging elements drawing

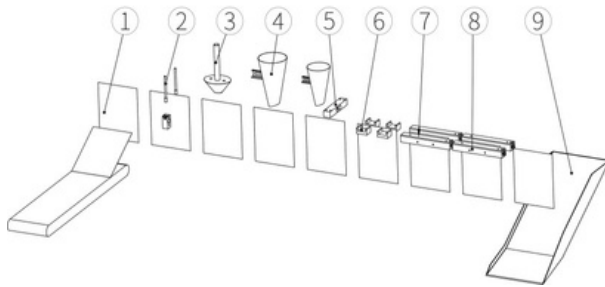

- 1、给袋/Bag feeding
- 2、开袋/Pouch opening
- 3、吹气/Air flushing
- 4、粗灌/Filling
- 5、精灌/Second filling
- 6、展袋/Pouch stretch
- 7、顶封/Heat top seal
- 8、冷封/Cool sealing
- 9、成品输出/Out let

技术参数 Technical Parameters

机型 Model	HC-240GT	HC-280GT
袋型 Type of Pouch	三边封/四边封/自立袋/拉链袋 Three-side seal/four-side seal/stand-up pouch/zipper bag	
最小袋 Min. pouch size	120 x 130mm	150 x 180mm
最大袋 Max. pouch size	240 x 350mm	280 x 400mm
包装速度 Packing speed	< 60袋/分钟 bags per minute	
包装容量 Packing range	≤2000ml	
下料工位 Packing station	2	
主机功率 Power	4KW	
电源要求 Volt	380V 3相 50Hz.	
耗气量 Air consumption	400L/min.	
工作气压 Air Pressure	0.7MPa	
主机重量 Machine weight	1500kg	1800kg
设备尺寸 Machine dimension	3255x1500x1420mm	3657x2160x1420mm



CONTACT US


Multimagotrade.com
+40-758-667-671

HC-240G 水平式给袋包装机 Horizontal Premade Pouch Packing Machine


产品描述 Product Description

本机可实现三边封、四边封、挂孔袋、自立袋、异形袋等袋型的包装，适合粉剂、颗粒、液体、膏体、固体物等物料包装需求。
This machine can realize the packaging of three-side seal, four-side seal, hanging hole bag, self-supporting bag, special-shaped bag and other bag types, which is suitable for the packaging needs of powders, granules, liquids, pastes, solids and other materials.

包装原理图 Packaging elements drawing

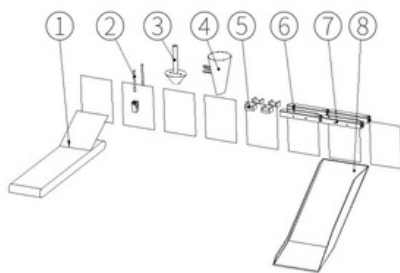

- 1、给袋/Bag feeding
- 2、开袋/Pouch opening
- 3、吹气/Air flushing
- 4、充填/Filling
- 5、展袋/Pouch stretch
- 6、顶封/Heat top seal
- 7、冷封/Cool sealing
- 8、成品输出/Out let

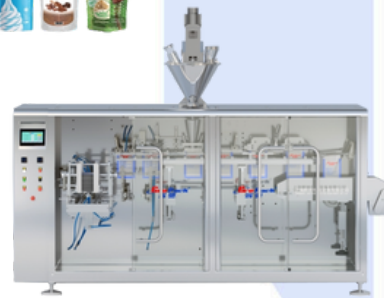

技术参数 Technical Parameters


机型 Model	袋型 Type of Pouch	最小袋 Min. pouch size	最大袋 Max. pouch size	包装速度 Packing speed	包装容量 Packing range	
HC-240G	三边封/四边封/自立袋/拉链袋	120 × 130mm	240 × 350mm	<60袋/分钟 pouch per min.	max 1500ml	
下料工位 Filling station	主机功率 Power	电源要求 Volt	耗气量 Air consumption	工作气压 Air pressure	主机重量 Machine weight	设备尺寸 Machine dimension
1个	3.5KW	380V 3P 50Hz.	300L/min.	0.7 Mpa.	1500kg	2735 × 1500 × 1420mm

HC-280G 水平式给袋包装机 Horizontal Premade Pouch Packing Machine

产品描述 Product Description

本机可实现三边封、四边封、挂孔袋、自立袋、异形袋等袋型的包装，适合粉剂、颗粒、液体、膏体、固体物等物料包装需求。
This machine can realize the packaging of three-side seal, four-side seal, hanging hole bag, self-supporting bag, special-shaped bag and other bag types, which is suitable for the packaging needs of powders, granules, liquids, pastes, solids and other materials.

包装原理图 Packaging elements drawing

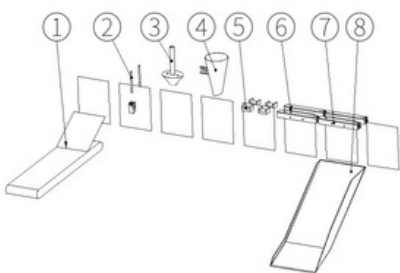

- 1、给袋/Bag feeding
- 2、开袋/Pouch opening
- 3、吹气/Air flushing
- 4、充填/Filling
- 5、展袋/Pouch stretch
- 6、顶封/Heat top seal
- 7、冷封/Cool sealing
- 8、成品输出/Out let



技术参数 Technical Parameters

机型 Model	袋型 Type of Pouch	最小袋 Min. pouch size	最大袋 Max. pouch size	包装速度 Packing speed	包装容量 Packing range	
HC-280G	三边封/四边封/自立袋/拉链袋 3/4 side seal/stand pouch/zip pouch	150 × 180mm	280 × 400mm	<60袋/分钟 pouch per min.	max. 2000ml	
下料工位 Filling station	主机功率 Power	电源要求 Volt	耗气量 Air consumption	工作气压 Air pressure	主机重量 Machine weight	设备尺寸 Machine dimension
1个	3.5KW	380V 3P 50Hz.	300L/min.	0.7MPa.	1800kg	3057 × 2160 × 1420mm



CONTACT US

Multimagotrade.com
+40-758-667-671


HC-330G 水平式给袋包装机 Horizontal Premade Pouch Packing Machine

产品描述 Product Description

本机可实现三边封、四边封、挂孔袋、自立袋、异形袋、拉链袋等，适用于粉剂、颗粒、液体、膏体、固体物等物料包装需求，也可根据客户需求定制。

This machine can realize three-side sealing, four-side sealing, hanging hole bags, self-supporting bags, special-shaped bags, zipper bags, etc. It is suitable for packaging needs of powders, granules, liquids, pastes, solids and other materials, and can also be customized according to customer needs.

包装原理图 Packaging elements drawing

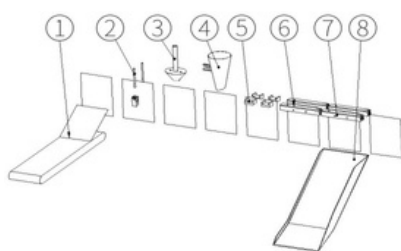

- 1、给袋/Bag feeding
- 2、开袋/Pouch opening
- 3、吹气/Air flushing
- 4、充填/Filling
- 5、展袋/Pouch stretch
- 6、顶封/Heat top seal
- 7、冷封/Cool sealing
- 8、成品输出/Out let



技术参数 Technical Parameters

机型 Model	袋型 Type of Pouch	最小袋 Min. pouch size	最大袋 Max. pouch size	包装速度 Packing speed	包装容量 Packing range	
HC-330G	三边封/四边封/自立袋/拉链袋 side seal/stand pouch/zip zipper pouch	150 × 180mm	330 × 500mm	15-30袋/分钟 pouch per min.	max. 2500ml	
下料工位 Filling station	主机功率 Power	电源要求 Volt	耗气量 Air consumption	工作气压 Air pressure	主机重量 Machine weight	设备尺寸 Machine dimension
1个	3.5KW	380V 3P 50Hz.	300L/min.	0.7MPa.	2000kg	3657 × 2160 × 1420mm

半自动称重式包装机 Semi-automatic Weighing Packing Machine

产品描述 Product Description

本机适用于粉末、颗粒的大袋包装，可与工业缝包机、气动热封口机配套。

This machine is suitable for large bag packaging of powders and granules, and can be matched with industrial bag sewing machines and pneumatic heat sealing machines.



技术参数 Technical Parameters

型号Model	HC-B100
包装重量 Packing Weight	1kg - 50kg
包装精度 Packing Accuracy	1 - 20kg, ≤ ±0.1-0.2%, >20kg, ≤ ±0.05-0.1%
包装速度 Packing Speed	1.5 - 6 次/分钟 1.5 - 6 time per min
电源 Power Supply	3P AC208 - 415V 50/60Hz
压缩空气 Air Supply	6kg/cm2 0.1m3/min
整机功率 Total Power	3.0 Kw
整机重量 Total Weight	500kg
整机体积 Overall Dimension	1125 × 975 × 3230mm
料箱容积 Hopper Volume	100 L



CONTACT US

HC-GZ 吸嘴袋旋转式包装机 Rotary Premade Spout Pouch Packing Machine



产品描述 Product Description

本机可实现平袋吸嘴袋、自立吸嘴袋的包装，适用于婴儿食品、洗涤、护理、饮料、调味品、酱料、化妆品、保健饮品等物料包装。This machine can realize the packaging of flat bag spout bag and self-supporting spout bag, and is suitable for the packaging of baby food, washing, care, beverages, condiments, sauces, cosmetics, health drinks and other materials.

技术参数 Technical Parameters

机型 Model	HC-GZ2	HC-GZ4	HC-GZ6	HC-GZ8
灌装嘴 Filling nozzle	2	4	6	8
包装速度 Packaging speed	25-35 bag/min.	50-70 bag/min.	80-100 bag/min.	100-120 bag/min.
灌装范围 Filling range	20-180ml, 80-350ml, 500-5000ml			
灌装精度 Filling accuracy	± 1%			
额定气压 Air pressure	0.65-0.95Mpa			
耗气量 Air consumption	0.5-0.9m /min.			
电源电压 Voltage	220V/380V 50Hz.			
耗气量 Air consumption	500L/min.			
总功率 Power	7KW			
主机重量 Machine weight	1200kg	1500kg	1800kg	2100kg
设备尺寸 Machine dimension	1100*1300*2000mm	1500*1300*2000mm	2200*1300*2000mm	2600*1300*2000mm



CONTACT US

Multimagotrade.com
+40-758-667-671

HC-G 旋转给袋式包装机 Rotary Premade Pouch Packing Machine



产品描述 Product Description

该机是一种自动旋转式预制袋包装机，适用于各种预制袋的包装。可满足不同规格、体积的产品包装。不仅可以包装三边、四边封袋，还可以包装挂孔袋、自立袋、异形袋、角嘴袋等。通过使用不同的计量设备适用于粉状、颗粒状、液体、膏状、块状等，包装类型切换方便。The machine is an automatic rotary premade pouch packing machine for premade bags with or without a zipper. It can meet the requirements which need different specifications, big or small volume but small capacity. It can not only pack 3-side or 4-side sealed bags but even also bags with hanging holes, standing pouches and shaped bags, and daypack bags with corner spouts, etc. It is applicable to powder, granules, liquid, paste and blocks, etc by using different measuring devices. It is convenient to switch the packing type.

技术参数 Technical Parameters

机型 Model	HC-G210	HC-G260	HC-G300
工位 Station	八工位 8 station	八工位 8 station	八工位 8 station
包装速度 Packing speed	< 70	≤72	≤65
适用袋宽 Bag width	90-210mm	130-260mm	160-300mm
适用袋高 Bag height	120-380mm	150-400mm	150-400mm
袋型样式 Type of bag	预制袋（平面袋，自立袋，拉链袋，手提袋、M袋等） Preformed bags (flat bags, stand-up bags, zipper bags, handbags, M bags, etc.)		
电源电压 Voltage	380V 50/60Hz.		
耗气量 Air consumption	500L/min.		
总功率 Power	8KW		
主机重量 Machine weight	500kg	600kg	650kg
设备尺寸 Machine dimension	1700X1140X1470mm	1850X1250X1520mm	2100*1500*1520mm



CONTACT US

Multimagotrade.com
+40-758-667-671



MULTI MAGO
TRADE

Multimagotrade.com
+40-758-667-671

全自动小立式包装机 Automatic Vertical Packing Machine for Small Volume



液体包装机
Liquid sachet packing machine



粉末包装机
Powder packing machine



颗粒包装机
Granule packing machine

产品描述 Product Description

本机适用于食品、医药、日化等行业的粉末、颗粒、液体、酱料类的产品包装；整机采用PLC+触摸屏控制，整机采用SUS304不锈钢结构，符合GMP标准，整机噪音小，运行稳定，维护简单。

This machine is suitable for packaging powders, granules, liquids, and sauces in food, medicine, daily chemical and other industries; the whole machine is controlled by PLC + touch screen. The whole machine adopts SUS304 stainless steel structure and complies with GMP standards. The whole machine has low noise and smooth operation. Stable and easy to maintain.

技术参数 Technical Parameters

型号 Model	HC-V160	HC-V240	HC-V320	HC-V420
包装袋型 Bag type	背封条袋、圆角袋、异形袋 Back seal bags, rounded corner bags, special-shaped bags	3/4边封袋 3/4-side seal bags	背封袋 Back seal bag	
包装容量 Packing capacity	1-100ml	1-100ml	1-300ml	200-1000ml
包装速度 Speed	20-40包/分钟 pouch/min	30-60包/分钟 pouch/min	20-90包/分钟 pouch/min	20-90包/分钟 pouch/min
最大膜宽尺寸 Max film width	160mm	240mm	320mm	420mm
制袋宽度 Bag making width	30-70mm	30-120mm	35-150mm	90-200mm
制袋长度 Bag making length	30-170mm	30-170mm	50-190mm	50-300mm
计量方式 Measuring method	组合称、线性秤、量杯、活塞泵、粉剂头等 Combination scale, linear scale, measuring cup, piston pump, powder head, etc.			
电源电压 Voltage	AC 220/380V 50/60Hz			
功率 Power	1.5KW	1.8KW	2.2KW	3KW
机器重量 Machine weight	200kg	220kg	250kg	500kg
外形尺寸 Dimensions	900*760*1900mm	920*860*1900mm	1000*910*1960mm	1140*1440*1600mm



CONTACT US

Multimagotrade.com
+40-758-667-671

全自动大立式包装机 Automatic Vertical Packing Machine



立式颗粒包装机
VFFS granules packing machine



立式粉末包装机
VFFS powder packing machine

产品描述 Product Description

HC-V 系列包装机是立式高性能机器，具有独特的性价比。适用于各行业的粉状、液体、酱料、颗粒状包装。它们是具有成本效益的包装解决方案，可以有效节省工厂空间。

The packing machines series HC-V are vertical high-performance machines that provide a unique price-performance ratio. Suitable for various industries' powder, liquid, sauce, and granules packaging. They are cost-effective packaging solutions that can effectively save factory space.

技术参数 Technical Parameters

型号 Model	HC-V520	HC-V620	HC-V720	HC-V820
包装袋型 Bag type	背封袋 Back seal bag			
包装速度 Speed	10-70包/分钟 pouch/min	10-70包/分钟 pouch/min	10-40包/分钟 pouch/min	5-40包/分钟 pouch/min
最大膜宽 Max. film width	520mm	620mm	720mm	820mm
袋子尺寸 Bag size	宽 W: 150-270mm 长 L: 100-400mm	宽 W: 100-300mm 长 L: 100-400mm	宽 W: 200-350mm 长 L: 150-500mm	宽 W: 250-400mm 长 L: 200-600mm
计量方式 Measuring method	组合称、线性秤、量杯、活塞泵、粉剂头等 Combination scale, linear scale, measuring cup, piston pump, powder head, etc.			
电源电压 Voltage	AC 220/380V 50/60Hz			
功率 Power	4KW	5KW	6KW	7KW
机器重量 Machine weight	600kg	700kg	800kg	900kg
外形尺寸 Dimensions	1200*1500*1700mm	1600*1400*1900mm	1600*1350*1950mm	1680*1530*2110mm



CONTACT US

Multimagotrade.com
+40-758-667-671

全自动烫边式包装机 Fully Automatic Edge-scalding Packing Machine



HC-V520T



HC-V720T

产品描述 Product Description

本系列包装机的包装袋是在立式袋基础上增封四个角边使包装袋立体感更强，使用进口伺服电机拉膜，人机界面触摸屏操作，使操作更加便捷；适用于大米、白糖、巧克力、坚果、薯片、虾条、冷冻水饺、糖果、面粉、奶粉等各类颗粒状、块状、条状、粉状物体的自动包装。

This series of packing machines are based on vertical bags with four additional sealed corners, making the packaging bags more three-dimensional. And imported servo motors are used for film pulling, and the human-machine interface touch-screen are used to make the operation more convenient. This series of machines is suitable for the automatic packaging of various granular, block-shaped, strip-shaped, and powdered objects such as rice, white sugar, chocolate, nuts, potato chips, shrimp crackers, frozen dumplings, candies, flour, and milk powder, etc.

技术参数 Technical Parameters

型号 Model	HC-V520T	HC-V720T
包装速度 Speed	10-40 bags/min	Max.25 bags/min
制袋尺寸 Bag size	正面宽 Front width:70-180mm	正面宽 Front width:100-180mm
	侧面宽 Side width:60-100mm	侧面宽 Side width:65-120mm
	边封宽 Width of side seal:5-10mm	边封宽 Width of side seal:5-10mm
	长度 Length:100-350mm	长度 Length:100-420mm
制袋形式 Bag making mode	盒式袋 Block bootom type	盒式袋 Block bootom type
最大膜宽 The max width of packing film	Max.500mm	Max.720mm
电源 Power source	4.5KW 220V 50Hz	4.5KW 220V 50Hz
外型尺寸 Dimension	(L)1600x(W)1400x(H)2000mm	(L)1700x(W)1420x(H)2100mm
机器重量 Machine weight	750kg	900kg



CONTACT US



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671

辅助设备 Auxiliary Equipment



真空上料机
Vacuum Loader



螺杆上料机
Screw auger feeder



Z型上料机
Z-type elevator



量杯
Measuring cup




多头组合秤
Multi head combination weigher



多头线性秤
Linear weigher



伺服螺杆下料
Servo screw filler



伺服活塞泵
Servo piston pump



碗式提升机
Cup elevator



组合秤平台
Platform



CONTACT US

Multimagotrade.com
+40-758-667-671



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671

LABELING INTELLIGENT MACHINE

- Linear self-adhesive labeling machine
- Rotary self-adhesive labeling machine
- Sleeve Shrink Labeling Machine
- Linear Hot Melt Glue Labeling Machine
- Rotary Hot Melt Glue Labeling Machine



CONTACT US

Multimagotrade.com
+40-758-667-671

MPC-AS 圆瓶贴标机 Round Bottle Labeling Machine

产品描述 Product Description

本机是针对食品、医药、日化等行业中不同尺寸的圆柱形产品，实现全自动智能贴标。本机型可以是连线自动化贴标，生产线，也可以单机操作。作为单机使用时，可以选择进料和收料转盘辅件，从而提高生产效率。

This series of machine is designed for cylindrical products of different sizes in the food, pharmaceutical, daily chemical and other industries, and realizes fully automatic intelligent labeling. This model can be connected to automatic labeling, production line, or it can be operated as a single machine. When used as a single machine, you can choose feeding and receiving turntable accessories to improve production efficiency.



技术参数 Technical Parameters

型号 Model	MPC-AS
电源电压 Voltage	AC110V/220V 50/60HZ
功率 Power	1.2kw
贴标速度 Labeling Speed	60-100瓶/分 bottles/min (速度可调, 视物件大小及标签长度而定 speed adjustable, depending on the size of the object and the length of the label)
贴标精度 Labeling accuracy	± 1mm (视产品特性, 软硬度及圆真度而定 depending on product characteristics, hardness and roundness)
物件范围 Bottle Height	高度 Height 40mm-250mm (可根据客户要求定做 can be customized according to customer requirements)
标签规格 Label Specifications	高度 Height 10mm-150mm 长度 Length 15mm-300mm (特殊规格可定做 can be customized)
纸卷尺寸 Paper roll size	内径 Inner diameter Φ76mm 外径 outer diameter Φ300mm (最大 maximum)
机器重量 Machine weight	180kg
设备尺寸 Machine size	2000mm × 1000mm × 1400mm (大 large) 1800mm × 1000mm × 1400mm (小 small)

MPC-DS 单/双面贴标机 Single/Side Labeling Machine

产品描述 Product Description

该系列产品适用于食品、化妆品、保健品、食用油、日用品等行业。针对不同尺寸的方形、扁形、锥形、圆柱形等瓶形，可完成产品的单面、双面贴标。

This series of machine are suitable for food, cosmetics, health care products, edible oil, daily necessities, and other industries. For different sizes of square, flat, tapered, cylindrical, and other bottle shapes, it can complete single-sided and double-sided labeling of products.



技术参数 Technical Parameters

型号 Model	MPC-SS/MPC-DS
电源电压 Voltage	AC110V/220V 50/60HZ
功率 Power	3kw
贴标速度 Labeling Speed	80-150 BPM瓶/分 (速度可调, 视物件大小及标签长度而定) (The speed is adjustable, depending on the size of the object and the length of the label)
贴标精度 Labeling accuracy	± 1mm (视产品特性, 软硬度及圆真度而定) (depending on product characteristics, hardness and roundness)
物件范围 Bottle Height	高度 H40mm-400mm (可根据客户要求定做) (can be customized according to customer requirements)
标签规格 Label Specifications	高度 H10mm-180mm 长度 L15mm-350mm (特殊规格可定做) (Special specifications can be customized)
纸卷尺寸 Paper roll size	内径 inner Φ76mm 外径 outer Φ300mm (最大 max)
机器重量 Machine weight	280kg
设备尺寸 Machine size	2800mm × 1300mm × 1500mm



CONTACT US

Multimagotrade.com
+40-758-667-671

MPC-BS 卧式贴标机 Horizontal Round Bottle Labeling Machine

产品描述 Product Description

本机适用于以下行业产品的全周或半周的自动化贴标要求，制药行业类，如安瓿瓶、口服液等产品；文具用品类，如笔杆、固体胶等产品；化妆品行业类，如口红、眉笔等产品；肉制品行业类，如火腿肠等圆形产品。

This series of machine is suitable for the full-circumference or half-circumference automatic labeling requirements of products in the following industries, pharmaceutical industry, such as ampoules, oral liquid and other products; stationery products, such as penholders, solid glue and other products; cosmetics industry, such as lip-stick, eyebrow pencil and other products; meat products industry, such as Cylindrical products such as ham sausage.



技术参数 Technical Parameters

型号 Model	MPC-BS
电源电压 Voltage	AC110V/220V 50/60HZ
功率 Power	1kw
贴标速度 Labeling Speed	10ml安瓿瓶贴标速度150-250瓶/分 (速度可调) 10ml ampoules, the labeling speed is 150-250 bottles/min (speed adjustable)
贴标精度 Labeling accuracy	± 0.5mm
物件范围 Bottle Height	外径 Outer diameter 10mm~24mm, 高度 height 20mm~150mm (特殊可定制 Customizable)
标签规格 Label Specifications	高度 Height 10mm~60mm 长度 Length 10mm~80mm
纸卷尺寸 Paper roll size	内径 Inner diameter Φ76mm 外径 outer diameter Φ300mm (最大 Maximum)
机器重量 Machine weight	220kg
设备尺寸 Machine size	1800mm × 600mm × 1400mm

MPC-PS平面贴标机 Planar Labeling Machine

产品描述 Product Description

本机适用于在各种物品的上平面贴标签或不干胶膜，如瓶子、罐子、书本、文件夹、盒子、纸箱等，更换覆标机构可适用于不平整表面贴标，可选配打码机或喷码机到贴标头，可实现在标签上打印生产日期、批号和喷印条码等信息。

Flat labeling machine is suitable for flat labeling or self-adhesive film on various items, such as bottles, cans, books, folders, boxes, cartons, etc., replace the labeling mechanism. The machine can be applied to labeling on uneven surfaces. It can be equipped with a coding machine or an inkjet printer to the labeling head, which can print the production date, batch number and printing barcode on the label.



技术参数 Technical Parameters

型号 Model	MPC-PS
电源电压 Voltage	AC110V/220V 50/60HZ
功率 Power	1kw
贴标速度 Labeling Speed	40-200个/分 pcs per min
贴标精度 Labeling accuracy	± 0.5mm (视被贴物的平整度而定 Depending on the flatness of the object to be attached)
纸卷尺寸 Roll size	内径 Inner diameter Φ76mm 外径 Outer diameter Φ300mm (最大 max)
机器重量 Weight	180kg
设备尺寸 Dimension	2000mm × 1000mm × 1500mm




CONTACT US

MPC-DW 定位贴标机 Orientation Labeling Machine

产品描述 Product Description

本机可用于食品、饮料、化妆品等行业对不同尺寸产品进行定位的圆形产品自动贴标，定点定位机构采用瓶体三点定位旋转方式，可实现360度精准定位贴标功能。

This machine can be used for automatic labeling of cylindrical products of different sizes in the food, beverage, cosmetics and other industries. The fixed-point positioning mechanism adopts the three-point positioning and rotation method of the bottle body, which can realize 360-degree precise positioning and labeling function.

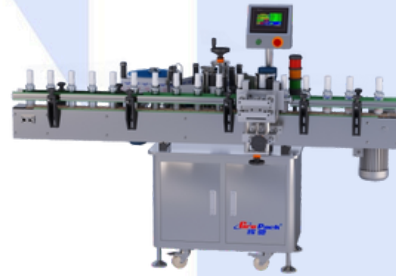

技术参数 Technical Parameters

型号 Model	MPC-DW
电源电压 Voltage	AC110V/220V 50/60HZ
功率 Power	1.5kw
贴标速度 Labeling Speed	30~50瓶/分 bottles/min (速度可调, 视物件大小及标签长度而定) (speed adjustable, depending on the size of the object and the length of the label)
贴标精度 Labeling accuracy	± 0.5mm (视产品特性, 软硬度及圆真度而定) (Depends on product characteristics, softness and roundness)
物件范围 Bottle Height	高度 Height 40mm~300mm (可根据客户要求定做) (Can be customized according to customer requirements)
标签规格 Label Specifications	高度 height 20mm~200mm 长度 Length 20mm~200mm (特殊规格可定做) (Special specifications can be customized)
纸卷尺寸 Paper roll size	内径 Inner diameter Φ76mm 外径 outer diameter Φ300mm (最大 Max.)
机器重量 Machine weight	200kg
设备尺寸 Machine size	2000mm × 1000mm × 1400mm
气压 Air pressure	0.6~0.8Mpa

MPC-DWX 星盘定位贴标机 Star Wheel Orientation Labeling Machine

产品描述 Product Description

本机适用于医药、日化、食品等行业，圆柱形物体全周或半周自动化高速贴标；采用回星盘转式结构。瓶子立进、立贴、立出。大幅提高贴标合格率。

Suitable for pharmaceutical, daily chemical, food and other industries, automatic high-speed labeling of cylindrical objects circumference or half circumference; adopts star wheel rotation structure. The bottle Stand-in, Stand-stick, Stand-out. Significantly improve the pass rate of labeling.



技术参数 Technical Parameters

型号 Model	MPC-DWX
电源电压 Voltage	AC110V/220V 50/60HZ
功率 Power	2.5kw
贴标速度 Labeling Speed	40~80瓶/分 bottles/min (速度可调, 视物件大小及标签长度而定) (speed adjustable, depending on the size of the object and the length of the label)
贴标精度 Labeling accuracy	± 0.5mm (视产品特性, 软硬度及圆真度而定) (Depends on product characteristics, softness and roundness)
物件范围 Bottle Height	高度 Height 40mm~300mm (可根据客户要求定做) (Can be customized according to customer requirements)
标签规格 Label Specifications	高度 Height 20mm~200mm 长度 Length 20mm~200mm (特殊规格可定做) (Special specifications can be customized)
纸卷尺寸 Paper roll size	内径 Inner diameter Φ76mm 外径 Outer diameter Φ300mm (max)
机器重量 Machine weight	280kg
设备尺寸 Machine size	2400mm × 1000mm × 1400mm



CONTACT US

MPC-S 折角贴标机 Corner Labeling Machine

产品描述 Product Description

本系列产品适用于各种包装盒或瓶子的封口贴标，广泛应用于食品、医药、日化、物流等行业，可根据客户需求完成包装盒上表面封口、下表面封口、对角封口、瓶子折角封口等。

This series of machine is suitable for sealing and labeling various packaging boxes or bottles, and is widely used in food, medicine, daily chemicals, logistics and other industries. It can complete the upper surface sealing, lower surface sealing, diagonal sealing, bottle fold angle sealing, etc. according to customer needs.



技术参数 Technical Parameters

型号 Model	MPC-S
电源电压 Voltage	AC110V/220V 50/60HZ
功率 Power	2kw
贴标速度 Labeling Speed	60~90盒/分 pcs/min (速度可调) (Depends on box size)
贴标精度 Labeling accuracy	± 1mm (视产品表面平整度而定) (depending on surface flatness)
物件范围 Bottle Height	高度 Height 20mm~200mm 宽度 Width 50mm~150mm (可根据客户要求定做) (can be customized according to customer requirements)
标签规格 Label Specifications	高度 Height 20mm~80mm 长度 Length 20mm~100mm (特殊规格可定做) (can be customized)
纸卷尺寸 Paper roll size	内径 Inner diameter Φ 76mm 外径 outer diameter Φ 300mm (最大) (maximum)
机器重量 Machine weight	180kg
设备尺寸 Machine size	2400mm × 1000mm × 1400mm

MPC-F 分页贴标机 Pagination Labeling Machine

产品描述 Product Description

本机可用于服装吊牌、卡片、电话卡、纸卡类的物体自动贴标；具有分页定位、自动贴标功能，本机型实现了提高生产效率，降低劳动成本。

This series is widely used for automatic labeling of clothing tags, cards, phone cards, and paper cards; Equipped with pagination positioning and automatic labeling functions, this model achieves improved production efficiency and reduced labor costs.



技术参数 Technical Parameters

型号 Model	MPC-F
电源电压 Voltage	AC110V/220V 50/60HZ
功率 Power	1.2kw
贴标速度 Labeling Speed	30~100张/分 piece/minute (速度可调) (speed adjustable)
贴标精度 Labeling accuracy	± 1mm (视产品表面平整度而定) (depending on product surface flatness)
容器范围 Container range	高度40mm~250mm (可根据客户要求定做) (can be customized according to customer requirements)
标签规格 Label specification	高度10mm~150mm 长度15mm~300mm (特殊规格可定做) (special specifications can be customized)
纸卷尺寸 Roll dimension	内径 internal diameter Φ 76mm 外径 outer diameter Φ 300mm (最大 max)
机器重量 Weight	280kg
设备尺寸 Equipment dimension	1800mm × 900mm × 1400mm




CONTACT US

MPC-PL 即时打印贴标机 Print-apply Labeling Machine

产品描述 Product Description

本机适用于平面、侧面的贴标，采用坚固可靠的重型支架，边压式边打印技术，丰富的通讯接口，高效、稳定、精准、高性价比，快速部署，灵活应用，高产能，适合大批量物流现场作业。

This series of machine are suitable for labeling on the plane and side. It adopts sturdy and reliable heavy-duty brackets, Synchronous pressing-printing technology, rich communication interfaces, high efficiency, stability, precise, highly cost-effective, rapid deployment, flexible application, and high production capacity. , suitable for mass logistics on-site work operations.

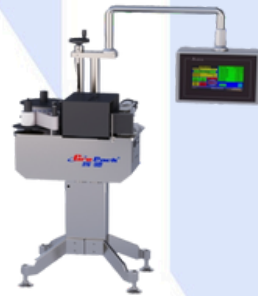

技术参数 Technical Parameters

型号 Model	MPC-PL
电源电压 Voltage	AC110V/220V 50/60HZ.
功率 Power	1kw
贴标速度 Labeling Speed	5-40件/分 pcs/min (与贴物、标签大小及贴标方式有关) (depending on the object being labeled, label size, and labeling method)
贴标精度 Labeling accuracy	± 2mm (不计包装件和标签误差) (excluding packaging and label errors)
容器范围 Container range	高度 Height 40mm-250mm (可根据客户要求定制) (customizable according to customer requirements)
标签规格 Label specification	高度 Height 20mm-104mm 长度 Length 20mm-300mm (特殊规格可定做) (special specifications can be customized)
纸卷尺寸 Roll dimension	内径 inner Φ 76mm 外径 outer Φ 300mm (最大 max.)
机器重量 Weight	150kg
设备尺寸 Equipment dimension	1000mm × 1000mm × 1600mm

MPC-L 纸箱平面贴标机 Carton Flat Labeling Machine

产品描述 Product Description

本机适用于在各种物品的上平面贴标签或不干胶膜，如书本、文件夹、盒子、纸箱等，更换覆标机构可适用于不平整表面贴标，广泛应用于大件产品的平面贴标，规格范围大的平面类物体贴标。

This machine is suitable for labeling flat surfaces or self-adhesive film on the upper surface of various articles, such as books, folders, boxes, cartons, etc. By replacing the labeling mechanism, it can be applied to labeling on uneven surfaces. It is widely used in flat labeling of large products and flat objects with a large range of specifications.



技术参数 Technical Parameters

型号 Model	MPC-L
电源电压 Voltage	220V 50/60Hz
功率 Power	750W
贴标速度 Labeling Speed	40-200个/分 pcs/min (视标签长度及被贴物尺寸计算) Calculated based on label length and the size of the object being labeled)
贴标精度 Labeling accuracy	± 1mm
容器范围 Container range	根据客户需求 (based on customer's needs)
标签规格 Label Specifications	根据客户需求 (based on customer's needs)
纸卷尺寸 Paper roll size	内径 inside diameter 76mm, 外径 Outside diameter 320mm
机器重量 Machine weight	110kg
设备尺寸 Machine size	1500*700*1550mm



CONTACT US

MPC-LG 螺杆进瓶贴标机 Screw Bottle Feeding Labeling Machine

产品描述 Product Description

本机适用于在各种物品的上平面贴标签或不干胶膜，如书本、文件夹、盒子、纸箱等，更换覆标机构可适用于不平整表面贴标，广泛应用于大件产品的平面贴标，规格范围大的平面类物体贴标。

This machine uses a screw conveying mechanism to deliver the product to the labeling position and completes the labeling operation through a precise control system. It is widely used in pharmaceutical, food, beverage and cosmetic industries.



技术参数 Technical Parameters

型号 Model	MPC-LG
瓶子直径 Bottle diameter	35mm
贴标速度 Labeling speed	100-120瓶/分钟 Bottles per min
标签长度 Label length	20-220mm
贴标精度 Label accuracy	+1mm
功率 Power	1.5Kw
电源电压 Voltage	220V 50/60HZ.
重量 Weight	200kg
机器重量 Machine weight	180kg
机器尺寸 Machine dimension	2000*800*1300mm

MPC-DT单标三面贴标机 Square Bottle Wrap Around Labeling Machine

产品描述 Product Description

本机适用于方瓶三面，四面贴标，广泛应用于化妆品、日化、食品、医药、塑胶等行业，在四方形的瓶子，一个周面上贴一张标签，一张标签包三个面或者四个面。

This machine is suitable for labeling three or four sides of square bottles. It is widely used in cosmetics, daily chemicals, food, pharmaceutical, plastics and other industries. On a square bottle, one label is attached to one circumference, and one label covers three or four sides.



技术参数 Technical Parameters

型号 Model	MPC-DT
电源电压 Voltage	AC110V/220V 50/60HZ
功率 Power	2.2kw
贴标速度 Labeling Speed	40-200个/分 pieces/min (与物料及标签尺寸有关) (related to material and label size)
贴标精度 Labeling accuracy	±1mm (视产品圆真度，垂直度而定) (depending on product roundness and verticality)
容器范围 Container range	Height 高度40mm~400mm (可根据客户要求定做 can be customized)
标签规格 Label specification	高度 Height 1mm~180mm 长度 Length 15mm~350mm (特殊规格可定做 can be customized)
纸卷尺寸 Roll dimension	内径 internal diameter Φ 76mm 外径 outer diameter Φ 300mm (最大 max)
机器重量 Weight	280kg
设备尺寸 Equipment dimension	2800mm × 1300mm × 1400mm



CONTACT US

Multimagotrade.com
+40-758-667-671

MPC-TS 双面加顶部贴标机 Double Sides & Top Side Labeling Machine

产品描述 Product Description

双面贴标机的系统自动检测被贴物，贴双侧面同时贴顶标，一次完成三个面的贴标工作，针对扁形、方形等表面不规则及有弧度瓶身而设计以确保贴标精度及效果。

The double-sided labeling machine system automatically detects the object to be labeled, labels double sides and the top at the same time, and completes the labeling work on three sides at one time. It is designed for flat, square and other irregular surface and curved bottles to ensure labeling accuracy and effect.



技术参数 Technical Parameters

型号 Model	MPC-TS
电源电压 Voltage	AC110V/220V 50/60HZ
功率 Power	2.2kw
贴标速度 Labeling Speed	40-200个/分 pieces/minute (与物料及标签尺寸有关) (related to material and label size)
贴标精度 Labeling accuracy	± 1mm (视产品圆真度，垂直度而定 depending on product roundness and verticality)
容器范围 Container range	高度 Height 40mm~400mm (可根据客户要求定做) (can be customized according to customer requirements)
标签规格 Label Specifications	高度 Height 1mm~180mm 长度 Length 15mm~350mm (特殊规格可定做) (special specifications can be customized)
纸卷尺寸 Paper roll size	内径 Inner diameter ϕ 76mm 外径 outer diameter ϕ 300mm (max)
机器重量 Machine weight	280kg
设备尺寸 Machine size	2800mmx1300mmx1400mm

MPC-JB 浆糊贴标机 Wet Glue Labeling Machine

产品描述 Product Description

本机是针对食品、医药、日化等行业中不同尺寸的圆柱形产品，实现全自动智能贴标，本机型可以是连线自动化贴标，也可以单机操作。

This machine is a wet glue labeling machine, suitable for pasting and labeling of various cylindrical bottles. It can automatically complete paper separation, gluing, labeling and cover - marking. It is suitable for labeling cylindrical bottles in condiments, wine (vinegar), pesticides, chemicals and other industries.



技术参数 Technical Parameters

型号 Model	MPC-JB
瓶子直径 Bottle diameter	55-110mm
瓶子高度 Bottle height	40-400mm
贴标速度 Labeling speed	40-130瓶/分钟 Bottles per min.
标签宽度 Label width	20-220mm
标签长度 Label length	80-370mm
贴标精度 Label accuracy	+1mm
机器尺寸 Machine dimension	2400*850*1100mm
重量 Weight	600kg
功率 Power	2500W
电源电压 Voltage	220V/380V 50/60HZ.



CONTACT US

MPC-300高速立式贴标机 High Speed Vertical Labeling Machine

产品描述 Product Description

本机是针对食品、医药、日化等行业中不同尺寸的圆柱形产品，实现全自动智能贴标，本机型可以是连线自动化贴标，也可以单机操作。

This series of products is designed for cylindrical products of different sizes in industries such as food, pharmaceutical, and daily chemicals, achieving fully automatic and intelligent labeling. This model can be connected for automatic labeling or operated as a single machine.



技术参数 Technical Parameters

型号 Model	MPC-300
电源电压 Voltage	AC110V/220V 50/60HZ.
功率 Power	1.4kw
贴标速度 Labeling speed	200~300瓶/分 bottles/minute (速度可调, 视物件大小及标签长度而定) (speed adjustable, depending on object size and label length)
贴标精度 Labeling accuracy	± 1mm (视产品特性, 软硬度及圆真度而定) (depending on product characteristics, hardness, and roundness)
容器范围 Container range	高度 Height 40mm~300mm (可根据客户要求定做) (can be customized according to customer requirements)
标签规格 Label specification	高度 Height 20mm~200mm 长度 Length 20mm~200mm (特殊规格可定做) (special specifications can be customized)
纸卷尺寸 Roll dimension	内径 internal diameter Φ 76mm 外径 outer diameter Φ 300mm (最大 max.)
机器重量 Weight	200kg
设备尺寸 Equipment dimension	2000mm × 1300mm × 1400mm

MPC-400高速卧式贴标机 High Speed Horizontal Labeling Machine

产品描述 Product Description

高速卧式贴标机适用于各种口服液瓶、安瓶、西林瓶等的高速自动贴标和进料。

High-speed horizontal labeling machine is suitable for high-speed automatic labeling and feeding of various oral liquid bottles, ampoules, vials, etc.



技术参数 Technical Parameters

型号 Model	MPC-400
电源电压 Voltage	AC110V/220V 50/60HZ.
功率 Power	2kw
贴标速度 Labeling Speed	200~400瓶/分 bottles/minute (速度可调, 视物件大小及标签长度而定) (speed adjustable, depending on object size and label length)
贴标精度 Labeling accuracy	± 0.5mm (视产品特性而定) (depending on product characteristics)
容器范围 Container range	外径 Outer diameter 10mm~24mm, 高度 height 20mm~150mm (特殊可定制) (Special customizable)
标签规格 Label specification	高度 Height 10mm~60mm 长度 Length 10mm~80mm
纸卷尺寸 Roll dimension	内径 inner Φ 76mm 外径 outer Φ 300mm (最大 Max.)
机器重量 Weight	400kg
设备尺寸 Equipment dimension	3000mm × 1400mm × 1800mm




CONTACT US

MPC-500高速入托贴标机 High Speed Pallet Labeling Machine

产品描述 Product Description

本机集贴标、入托、联动控制全线为一体。适用于各种口服液瓶、安瓶、西林瓶等的高速自动贴标和进料。

This series of machine integrates the whole line of labeling, palletizing, and linkage control. It is suitable for high-speed automatic labeling and feeding of various oral liquid bottles, ampoules, vials, etc.

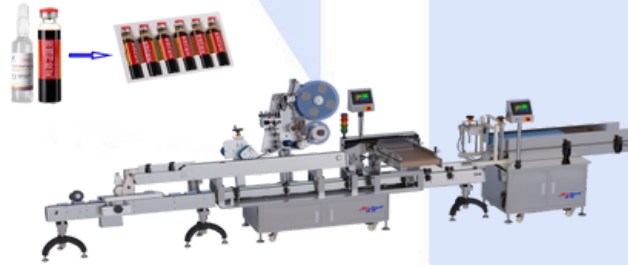

技术参数 Technical Parameters

型号 Model	MPC-500
电源电压 Voltage	AC110V/220V 50/60HZ
功率 Power	2.5kw
贴标速度 Labeling Speed	200~400瓶/分 bottles/minute (速度可调, 视物件大小及标签长度而定) (speed adjustable, depending on object size and label length)
贴标精度 Labeling accuracy	± 0.5mm (视产品特性而定) (depending on product characteristics)
容器范围 Container range	外径 Outer diameter 10mm~24mm, 高度 height 20mm~150mm (特殊可定制) (Special customizable)
标签规格 Label specification	高度 Height 10mm~60mm 长度 Length 10mm~80mm
纸卷尺寸 Roll dimension	内径innerΦ76mm 外径outerΦ300mm (最大max.)
机器重量 Weight	500kg
设备尺寸 Equipment dimension	6000mm × 1400mm × 1800mm

MPC-600 高速星盘贴标机 High Speed Star Wheel Labeling Machine

产品描述 Product Description

本机是针对食品、医药、日化等行业中小圆瓶，实现高速全自动智能贴标，如精油瓶、西林瓶等。

This machine is designed for small and medium-sized round bottles in the food, pharmaceutical, daily chemical and other industries to achieve high-speed fully automatic intelligent labeling, such as essential oil bottles, vials bottles, etc.



技术参数 Technical Parameters

型号 Model	MPC-600
电源电压 Voltage	AC220V 50/60HZ 1PH
功率 Power	2.2KW
供料方式 Material supply method	圆盘立式供料 Vertical disc feeding
贴标方式 Labeling type	螺杆+花盘立式贴标 Vertical labeling of screws and flower plates
贴标速度 Labeling speed	MAX 500~600瓶/分 bottles/minute (根据瓶型大小而定) (depending on bottle size)
贴标精度 Labeling accuracy	± 0.5mm需视产品之外径大小、特性及材质、软硬度及真圆度而定 depends on the outer diameter, characteristics, material, hardness, and roundness of the product
印字气源 Printing gas source	6kg/cm ²
耗气量 Gas consumption	0.5m ³ /min
适用产品 Applicable product	2ml~50ml西林瓶 Penicillin bottle
适用标签 Applicable label	高 Height 15~80mm ,长 Length 23~200mm
标签容量 Label capacity	直径 Diameter 360mm ,纸卷内径 inner diameter of paper roll 76mm



CONTACT US

Multimagotrade.com
+40-758-667-671

MPC-LS 套标机 Sleeve Shrink Labeling Machine

产品描述 Product Description

本机采用国际先进技术，覆盖PET瓶上的圆形标签，然后热缩固定在瓶身指定的位置上，适用于各种瓶型的果汁、茶饮料、乳制品、纯净水、调味品、啤酒、运动饮料等食品饮料行业。

This machine adopts international advanced technology to cover the round label on the PET bottle, and then heat shrink and fix it at the specified position on the bottle body. It is suitable for various bottle types of juice, tea beverages, dairy products, pure water, condiments, beer, sports drinks and other food and beverage industries.



技术参数 Technical Parameters

型号 Model	MPC-LS
主机尺寸 Main engine size	1100*1300*2000mm
套标速度 Labeling speed	100/250/400瓶/分 bottles/min (三速机型) (three speed model)
电源 Voltage	3P AC380/220V
功率 Power	3KW
贴标精度 Labeling accuracy	± 1mm (取决于产品特性、硬度和圆度) (Depends on product characteristics, hardness and roundness)
适用瓶径 Applicable bottle diameter	28mm ~ 125mm
适用标签长度 Applicable label length	30mm ~ 250mm
适用标签厚度 Applicable label thickness	0.035mm ~ 0.13mm
瓶子高度 Air source pressure	15mm~320mm
标签材料 Label material	PVC,PET,OPS
瓶型 Bottle Type	圆形、方形、椭圆形、长方形 round, square, oval, rectangular
机器重量 Weight	700KG

MPC-RS 旋转不干胶贴标机 Rotary Self-adhesive Labeling Machine

产品描述 Product Description

旋转不干胶贴标机适用于圆柱形、方形、椭圆等不同规格产品的单标或多标不干胶定位、不定位贴标。

The rotary self-adhesive labeling machine is suitable for single-label or multi-label self-adhesive positioning or non-positioning labeling of products of different specifications such as cylindrical, square, and oval.



技术参数 Technical Parameters

型号 Model	MPC-RS
贴标速度 Labeling speed	100-600个/分 pcs/min (视标签长度及被贴物尺寸计算 based on label length and the size of the object being labeled)
贴标精度 Label accuracy	± 1mm
容器范围 Container range	直径 diameter φ40-200mm
贴标产品材质 Labeling product material	塑料、金属、玻璃 Plastic, metal, glass
贴标最大宽度(高度) Maximum width (height) of label	220mm
电压 Voltage	380V 50/60Hz.
功率 Power	6KW
机器重量 Weight	3000kg
设备尺寸 Machine dimension	3000*2500*2200mm



CONTACT US

Multimagotrade.com
+40-758-667-671



MULTI MAGO
TRADE

Multimagotrade.com
+40-758-667-671

MPC-LH 直线式热熔胶贴标机 Linear Hot Melt Glue Labeling Machine

产品描述 Product Description

本机可满足圆形、椭圆形、方形等不同形状的塑料、玻璃瓶及铁罐产品的贴标，也可用于灌装前贴标或灌装后贴标。适用于洗涤、饮料、矿泉水、食品等各种OPP、珍珠膜、复合纸等卷装材料标签的贴标。

This machine can meet the labeling requirements of plastic, glass bottles and iron cans of different shapes such as round, oval and square, and can also be used for labeling before or after filling. It is suitable for labeling of various OPP, pearl film, composite paper and other roll material labels for detergent, beverages, mineral water, food, etc.



技术参数 Technical Parameters

型号 Model	MPC-LH
贴标类型 Label type	单周贴标 Single body mark
标签尺寸 Label size	长 Length :125-325mm 高 Height :20-190mm
上胶温度 Gluing temperature	120-160°C
被贴标产品材质 Material of the labeled product	塑料、金属、玻璃 Plastic, metal, glass
产能 Capacity	50-120 瓶/分钟 Bottles/minute
电压 Voltage	380V 50Hz (Customizable)
气源压力 Air source	0.5-0.8Mpa.
耗气量 Air consumption	200L/分钟 minutes
功率 Power	7.5Kw
机器重量 Weight	1500kg
设备尺寸 Machine dimension	3000*1250*1800mm(L*W*H)

MPC-RH 旋转式热熔胶贴标机 Rotary Hot Melt Glue Labeling Machine

产品描述 Product Description

本机可用于洗涤、饮料、矿泉水、食品等各种OPP、珍珠膜、复合纸等卷装材料标签贴标的设备，可用于各种形状的塑料、玻璃瓶和铁罐产品的贴标，如圆形、椭圆形、方形等产品贴标。

This machine can be used for labeling of various OPP, pearl film, composite paper and other roll materials such as detergent, beverage, mineral water, food, etc. It can be used for labeling of plastic, glass bottles and iron cans of various shapes, such as round, oval, square and other product labeling.



技术参数 Technical Parameters

型号 Model	MPC-RH
容器装量范围 Container filling range	200-2500ml
容器直径 Container diameter	40-200mm
贴标头数 Labeling heads	6、12、16头 heads
贴标速度 Labeling speed	100-500瓶/分钟 Bottles per minute
贴标精度 Labeling accuracy	± 1mm
上胶温度 Gluing temperature	120-160°C
被贴标产品材质 Material of the labeled product	塑料、金属、玻璃等容器 Plastic, metal, glass
贴标最大宽度（高度） Maximum width (height) of label	150mm (可根据客户需求定制 Can be customized)
标签卷最大外径 Maximum outer diameter of label roll	600mm
标签卷纸芯直径 Label roll core diameter	152mm
电源 Voltage	AC380V 50/60Hz
功率 Power	8KW
设备重量 Weight	2000kg
设备尺寸 Machine dimension	3000*2500*2200mm



CONTACT US

Multimagotrade.com
+40-758-667-671

HCCW-500纸箱检重秤 Carton Check Weigher



产品描述 Product Description

主要用于大件产品在线重量检测，如整箱产品、整袋产品内物品缺件检测；如一箱药品里面缺件缺量，整箱食品中少量或量过多。可进行重复复核，甄别剔除。

It is mainly used for online weight detection of large products, such as the detection of missing items in the entire box of products and bags of products; such as the missing parts and quantity in a box of medicines, and the small or excessive quantity in the whole box of food. Can be repeatedly reviewed and screened out.

技术参数 Technical Parameters

型号 Model	HCCW-500
称重范围 Weighing Range	20-150kg
最高分选精度 Highest Sorting Accuracy	± 10g
检测速度 Detection Speed	最大输送速度: 20米/分 Max Conveying Speed: 20m/min
剔除方式 Culling method	推杆式 Push rod type
输送带离地高度 Height of conveyor belt from the ground	750 ± 50mm



CONTACT US



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671

CHECK WEIGHER SERIES

- Check Weigher
- Metal Detector
- Xray Inspector Machine
- Real Time Printing and Weighing Labeler
- Carton Check Weigher



CONTACT US

Multimagotrade.com
+40-758-667-671

X射线检测系统 X-ray Inspection System



产品描述 Product Description

X射线异物检测机，适用于食品、药品、化工产品等瓶类包装产品。

X-ray foreign object detection machine, suitable for Bottle packaging products, such as food, medicine, chemical products. etc

技术参数 Technical Parameters

X射线功率 X-ray power	Max.480W 120KV
通道尺寸 Size of channel	W:180mm L:250mm
输送带 Conveyor	输送速度 Conveyor speed: 10-60m/min
X射线泄露 X-ray leakage	<1 μ Sv/H
适合的产品 Suitable products	包装或未包装 Wrapped or unwrapped
维护 Maintain	易清洁和维护 Easy to clean and maintain

金属检测机 Metal Detector



产品描述 Product Description

采用低周波技术，可以高精度的检测铝箔包装产品、铝罐包装产品中微小的铁和不锈钢金属异物；不同于仅测铁类金属杂质的铁磁式检针机，没有普通金属检测机的产品效应问题；适合于检测高温、高盐、高糖、含水的产品。

Aluminum Foil metal detector is specifically capable of detecting minimum ferrous and stainless steel! from packages of aluminum sealing bags, aluminum foil bags, aluminum tinned ham sausage, and products packaged in aluminum. Suitable for detecting high temperature, high salty, high sugar, and water-containing products.

技术参数 Technical Parameters

型号 Model	HC-GC212	HC-GC215	HC-GC315	HC-GC320
防护等级 Degree	IP54/IP66			
速度 Speed	32-52m/min			
剔除方式 Rejection Device	吹气式/拔杆式/推杆式/滑落式 Blowingtype/pullrod type/push rodtype/sidingtype		推杆式/滑落式 push rod type/slidingtype	
通过尺寸(mm) Size	300(W)x120(H)	300(W)x150(H)	400(W)x150(H)	400(W)x200(H)
检测灵敏度(mm) Detection Sensitivity	Fe: ϕ 0.8 Sus: ϕ 1.5	Fe: ϕ 1.0 Sus: ϕ 2.0	Fe: ϕ 1.0 Sus: ϕ 2.0	Fe: ϕ 1.2 Sus: ϕ 2.5
电源要求 Power	220V/440W/50/60HZ/2A		220V/660W/50/60HZ/3A	
包装尺寸(mm) Dimension	1460(L)x1140(W)x1280(H)	1460(L)x1200(W)x1280(H)	1940(L)x1540(W)x1360(H)	2080(L)x1480(W)x1360(H)
包装重量 Weight	270kg	290kg	380kg	390kg



CONTACT US

Multimagotrade.com
+40-758-667-671

HCCW 系列检重秤 HCCW Series check Weigher



产品描述 Product Description

主要用于大件产品在线重量检测，如整箱产品、整袋产品内物品缺件检测；如一箱药品里面缺件缺量，整箱食品中少量或量过多。可进行重复复核，甄别剔除。

It is mainly used for online weight detection of large products, such as the detection of missing items in the entire box of products and bags of products; such as the missing parts and quantity in a box of medicines, and the small or excessive quantity in the whole box of food. Can be repeatedly reviewed and screened out.

技术参数 Technical Parameters

型号 Model	HCCW-150	HCCW-220	HCCW-300
称重范围 Weighing range	5-500g	5-1200g	5-3000g
称重精度 Highest sorting accuracy	± 0.1g	± 0.5g	± 1g
显示分辨率 Display resolution	0.1g		
输送带离地高度 Height of conveyor belt from the ground	720mm ± 50mm		
秤体部分材料 Weigh part of the material	全SUS304不锈钢制作 SUS 304 stainless steel materia		
剔除方式 Culling method	推杆式剔除 Push rod type rejection		

称重即时打印贴标机 Real-time Printing and Weighing Labeler



即时贴标机

Instant Labeling Machine

检重秤
Check Weigher



产品描述 Product Description

该设备是一款自动称重打印贴标机：产品通过自动称重机，实时将重量信息发送至贴标机，贴标机自动打印标签，自动完成贴覆标签，稳定性高，适合各类纸箱，纸盒，各种包装产品的在线作业。

This equipment is an automatic weighing, printing and labeling machine; the product passes through the automatic weighing machine and sends weight information to the labeling machine in realtime. The labeling machine automatically prints labels and automatically completes labeling. It has high stability and is suitable for various applications, Online operations for cartons, cartons, various packaging products, etc.

即时贴标机参数 Instant Labeling Machine Parameters

贴标速度 Labeling speed	5-40件/分 5-40pieces/min
贴标精度 Labeling accuracy	± 1mm
标签宽度 Label width	20-104mm
标签长度 Label length	20-300mm

检重秤技术参数 Technical Parameters of Checkweigher

型号 Model	HCCW-300P	HCCW-500P
称重范围 Weighing range	5-2500g	1-10kg
最高分选精度 Highest Sorting Accuracy	± 1g	± 10g
检测速度 Detection Speed	最大输送速度：30米/分 Max Conveying Speed:30m/min	最大输送速度：20米/分 Max Conveying Speed:20m/min
输送带离地高度 Height of conveyor belt from the ground	750mm ± 50mm(特殊规格可定制) (Special specifications can be customized)	
剔除方式 Culling Method	推杆式 Push rod type	



CONTACT US

Multimagotrade.com
+40-758-667-671



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671



协作机器人
Collaborative Robots

型号 Model	MD-02X
负载 Load	0-25kg, 25-120kg
工作半径 Working radius	1300-1900mm
码垛速度 Palletizing speed	6-8boxes/min
IP等级 IP rating	Ip54
最大功耗 Maximum power consumption	3.3KW
额定电压 Rated voltage	220V 50Hz
整机重量 Machine weight	300kg
占地面积 Floor area	1510 x1720mm



单立柱码垛机
Single Column Palletizer

型号 Model	MD-01L
适用产品 Suitable products	纸箱、膜包、编织袋、大桶等 Cartons, film bags, woven bags, barrels, etc.
码垛速度 Palletizing speed	3-8箱或袋/分钟 Box or bag/minute
搬运重量 Handling weight	≤70kg
运行轨迹 Running track	上下/平面 Up and down/plane
压缩空气 Compressed air	5-6kg/cm3
电源电压 Voltage	220V/380V 50/60Hz
功率 Power	5KW
主机重量 Host weight	约 about 500kg



高位码垛机
High-level Palletizer

型号 Model	MD-02G
适用产品 Applicable products	各类纸箱产品 Various types of cardboard box products
适用栈板 Applicable pallet	L1000-1200mm*W1000-1200mm (特殊规格可定制 Special specifications can be customized)
码垛速度 Stacking speed	13-26袋/分钟 Bag/min
码垛高度 Stacking height	1300-1800mm (特殊规格可定制) Special specifications can be customized)
使用气源 Air source	6-7kg/cm3
电源 Voltage	380V 50/60Hz
功率 Power	13KW
机器尺寸 Dimension	1300*3500*3200mm



低位码垛机
Low Level Palletizer

型号 Model	MD-01D
适用产品 Applicable products	瓶、箱、袋子、桶 Bottles, boxes, bags, barrels
适用栈板 Applicable pallet	L1000-1200mm*W1000-1200mm(特殊规格可定制) Special specifications can be customized)
码垛速度 Stacking speed	单通道:15-25箱/分钟 双通道:20-40箱/分钟 (Single channel: 15-25 boxes/min Dual channel: 20-40 boxes/min)
码垛高度 Stacking height	1300-1800mm
使用气源 Airsource	6-7kg/cm3
电源电压 Voltage	380V 50/60Hz
功率 Power	9KW
机器尺寸 Dimension	7300*4500*3200mm



CONTACT US

Multimagotrade.com
+40-758-667-671



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671

INTELLIGENT SECONDARY PACKAGING PRODUCTION

- Carton Erector
- Carton Packing Machine
- Carton Sealing Machine
- Strapping Machine
- Palletizer
- Intelligent Filling Line




CONTACT US

Multimagotrade.com
+40-758-667-671



MULTI MAGO
TRADE

Multimagotrade.com
+40-758-667-671



全自动立式开箱机
Automatic Carton Opener

型号 Model	CE-1
开箱速度 Unpacking speed	≤12箱/分钟 Carton/min
纸箱范围 Carton dimension	L 250-460*W 150-400*H 100-400mm (最小不可同时存在 Min cannot exist at the same time)
胶带尺寸 Tape size	48/60/75mm
纸箱暂存量 Temporary storage of cartons	80-100PCS (800-1000mm)
台面高度 Table height	620 ± 30mm
耗气量 Gas consumption	450NL/min
电源/气压 Power supply/Air pressure	220V 50/60HZ/6kg/cm
机器重量/尺寸 Machine weight/size	450KG/2100*2100*1450mm



自动折盖封箱机
Automatic Folding and Sealing Machine

型号 Model	ACS-1
封箱速度 Sealing speed	≤20箱/分钟 box/min
最大包装尺寸 Max packing size	W500xH500mm
最小包装尺寸 Min packing size	W120xH120mm
电源电压 Voltage	110V, 220-240V/50-60HZ, 1Phase
耗气量 Air consumption	50NL/min
消耗功率 Power consumption	0.6Kw
外形尺寸 Dimensions	1840x1000x1600mm
重量 Weight	240kg



全自动捆包机
Fully Automatic Strapping Machine

型号 Model	SM-1
PP带 PP belt	宽度 width W9-18mm 厚度 thickness 0.5-1.0mm
带盘适应 Reel Adaptation	宽 width 190-230mm; 内径 inside diameter 200mm; 外径 Outside diameter 200-450mm
捆包速度 Baling speed	24箱/分钟 box/min
弓架尺寸 Bow frame size	850 × 600mm
打包尺寸 Packing size	最小 min 100 × 30mm 最大 max 850 × 600mm
烫粘部位 Hot glue area	底部 bottom
电源 Power supply	220V/380V (50/60HZ)/2.5KW
外形尺寸 Dimensions	L1630*W700*H1570mm



封箱捆包一体机
Sealing and Strapping Machine

型号 Model	CSS-1
适用纸箱 Applicable carton	L200-600xW150-500xH150-500mm (以实际纸箱为准 Subject to the actual carton)
适用胶带 Applicable tape	48-75mm择一使用 (Choose one to use)
适用带宽 Applicable bandwidth	9-15mm择一使用 (Choose one to use)
生产速度 Production speed	10-12箱/分钟 box/min
电源电压 Voltage	220/380V 50/60Hz
压缩空气 Air pressure	5-6kg/cm ³
外形尺寸 Dimensions	L2200*W1400*H1550



CONTACT US

Multimagotrade.com
+40-758-667-671



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671




X轴Y轴抓取式装箱机
X-axis Y-axis Grab Type Case Packing Machine

型号 Model	STC-1
运动学结构 Kinematic structure	直角坐标 Cartesian coordinates
工作范围 Working range	W800*H600mm
自由度 Degree of freedom	2+1°
有效负载 Effective load	50kg
保护等级 Protection level	2P55
拾取和放置动作 Pick and place actions	10-20次/分钟 Times/min
定位精度 Positioning accuracy	±0.2mm
主机重量 Host Weight	450kg



跌落式装箱机
Drop-type Case Packing Machine

型号 Model	DTC-1
包装形式 Packaging type	过桥式下落装箱 Bridge-type drop packing
装箱速度 Packing speed	5-15箱/分钟 Box/min
装箱方式 Packing method	一箱或多箱/次 One or more boxes/times
适用范围 Scope of application	瓶装、罐装产品 Bottled and canned products
空气压力 Air pressure	6-7kg/cm³
功率 Power	5KW
电源 Power supply	220/380V 50/60Hz
机器尺寸 Machine size	定制 Customized

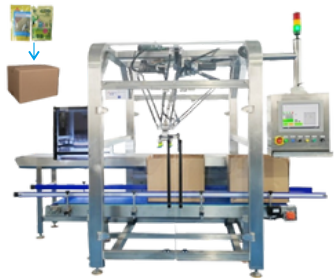

蜘蛛手装箱机
Spider Pick-Put Carton Packing Machine

型号 Model	DR-1300
装箱速度 Packing speed	30-120包/分钟 Packs/min
负载范围 Load range	0-5kg, 5-15kg
产品尺寸 Product size	长L≤450mm, 宽W≤430mm, 高H≤120mm
装箱尺寸 Box size	长L≤600mm, 宽W≤430mm, 高H≤450mm
输入电源 Input Power	AC 380V 50Hz
额定功率 Rated power	9.4KW
机架材质 Frame material	碳钢喷涂或304不锈钢 Carbon steel spraying or 304 stainless steel
外形尺寸 Dimensions	3350*1600*2900mm



机械手装箱机
Robot Packing Machine

型号 Model	HC-Z250
有效负载 Payload	30-250kg (可根据重量选择适合型号的机器人 Choose the right robot model based on weight)
工作半径 Working radius	800-3150mm
装箱速度 Packing speed	10-40箱/分钟 Box/minute
装箱方式 Packing method	单相或多箱/次 Single phase or multiple boxes/times
轴数 axes quantity	4
防护等级 Protection level	IP54
适用气源 Applicable gas source	6-7kg/cm
纸箱尺寸 Carton size	根据客户要求 According to customer requirements



CONTACT US

Multimagotrade.com
+40-758-667-671



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671



抓取式装箱机
Grap Type Case Packing Machine

型号 Model	HC-Z20
包装形式 Packing form	抓取式 Grab type
装箱速度 Packing speed	≤20箱/分钟 Box/min
装箱层数 Packing Layers	一层 Single layer
功率 Power	6KW
压缩空气 Compressed air	0.4-0.6Mpa
耗气量 Gas consumption	30L/min
重量 Weight	2300kg
外形尺寸 Dimensions	2200*1880*3000mm



桁架式装箱机
Truss Type Case Packing Machine


型号 Model	HC-Z500
适用产品 Applicable Products	塑料瓶、玻璃瓶、铝瓶、纸盒等 Plastic bottles, glass bottles, aluminum bottles, paper boxes, etc.
装箱速度 Packing speed	≥6箱/分钟 Box/minute (根据产品装箱数量和层次 According to the product packing quantity and level)
纸箱尺寸 Carton size	根据客户需求 Based on customer's needs
电源 Voltage	AC 380V 50/60Hz
功率 Power	4.8Kw
气源 Gas source	0.6-0.8Mpa
外形尺寸 Dimensions	2550 * 3400 * 2500mm



一片裹包式装箱机
One Piece Wrapping Carton Packing Machine

型号 Model	HC-CB01
箱盒包装成品规格 Box packaging finished product specifications	最大max=L450*W300*H330mm; 最小min=L260*W165*H90mm (特殊规格可定制) (Special specifications can be customized)
包装纸张尺寸规格 Packaging paper size specifications	最大max=L1450*W680mm; 最小min=L582*W373mm (特殊规格可定制) (Special specifications can be customized)
包装材质 Packaging material	瓦楞纸 Corrugated paper
电压 Voltage	220/380V 50Hz/60Hz
功率 Power	8KW
压缩空气 Air pressure	6.0kg/cm ³
耗气量 Air consumption	1000L/min
外形尺寸 Dimensions	L6100*W2800*H2000mm

液体灌装线 Liquid Filling Line

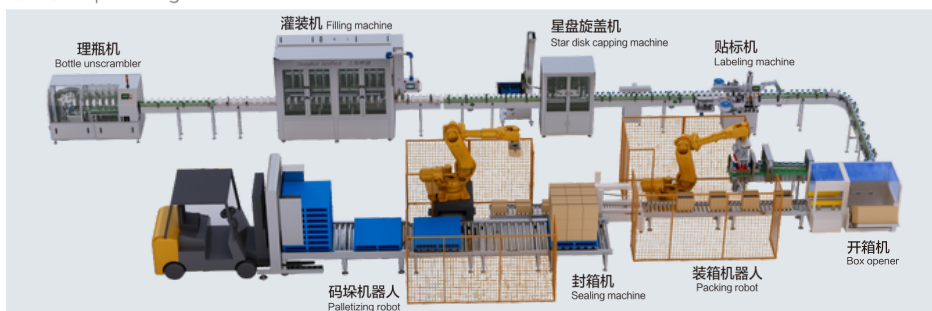

CONTACT US

Multimagotrade.com
+40-758-667-671




MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671


智能灌装生产线 Intelligent Filling Production Line

我们可以提供全套完整的智能灌装生产线，包括灌装机、旋盖机、贴标机、喷码机、铝箔封口机、开箱机、装箱机、封箱机、码垛、仓储。客户可根据不同的产品和产量选择不同的生产设备。
We can provide complete set of intelligent filling production lines, include filling machine, capping machine, labeling machine, coding machine, aluminum foil sealing machine, carton erector, carton packer, carton sealer, palletizer, and storage. Customer can choose different production equipment according to different products and capacity.


日化用品灌装线 Daily and Chemicals Product Filling Line

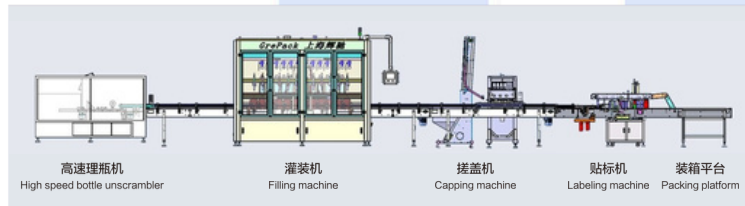

食用油灌装线 Edible oil Filling Line

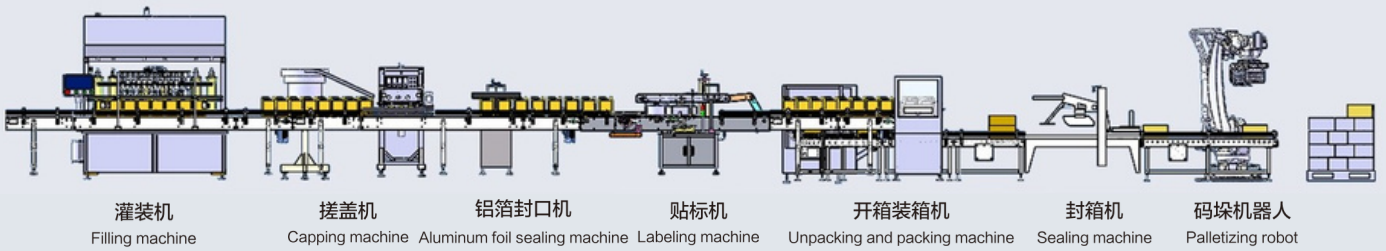

酱料/膏体灌装线 Sauce/Cream Filling Line

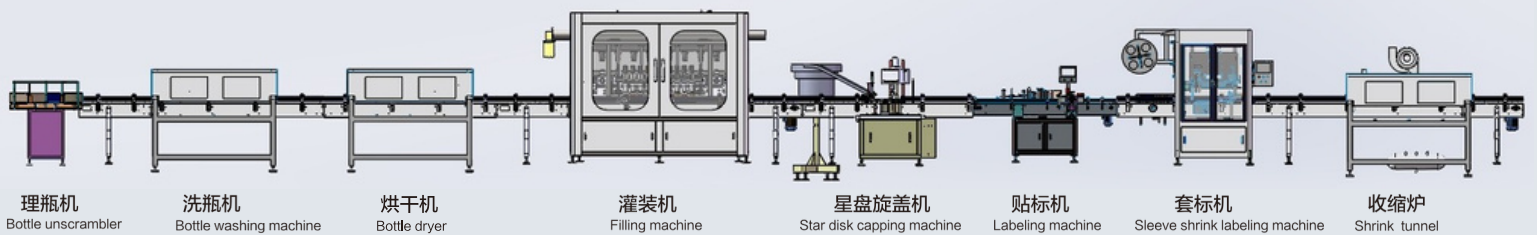

CONTACT US

Multimagotrade.com
+40-758-667-671



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671

二氧化碳激光打印机 CO² Laser Printer



产品描述 Product Description

智能管理您的打标工序，从车间到自动化Th产线让您轻松完成多个任务，重复检查，历史文件等可外部数据导入或扫码枪中获取数据来源；通过串口或网口进行数据通讯并自带单机双机发码软件。

It allows you to automatically scan the data of multiple processes from the production line or from the external production line, so that you can easily complete the automatic inspection of multiple process data sources, such as th; Carry out data communication through serial port or network port, and bring its own single machine and dual machine coding software.

技术参数 Technical Parameters

型号 Model	HC02-30W	HC02-40W	HC02-60W
机器材质 Machine material	喷砂氧化全铝结构 Sandblasted and oxidized all-aluminum structure		
激光器 Laser	密封金属射频CO ² 激光发射器 Sealed metal radio frequency CO ² laser transmitter		
激光波长 Laser wavelength	标准10.6um, 可选10.2或9.3um Standard 10.6um, optional 10.2 or 9.3um		
打标速度 Marking speed	≤12000mm/s		

紫外激光打码机 UV3/5/10W Series Laser Printer



技术参数 Technical Parameters

型号 Model	HUV-3W	HUV-5W	HUV-10W
机器材质 Machine material	喷砂氧化全铝结构 Sandblasted and oxidized all-aluminum structure		
激光器 Laser	密封式紫外激光发Th器 Sealed UV laser Th generator		
激光波长 Laser wavelength	355nm		
打标速度 Marking speed	≤12000mm/s		



CONTACT US

Multimagotrade.com
+40-758-667-671

热发泡喷码机 Thermal Inkjet Printer



产品描述 Product Description


人性化的智能喷印设备,精致牢靠的金属坚固外壳及配件,信息支持文本、时钟、条码、表格、图片随意组合,1-9级灰度可调,加黑喷印效果最高600*600DPI分辨率,打印效果清晰美观,支持U盘信息数据导入导出。

Humanized intelligent printing equipment,Exquisite and reliable metal solid shell and accessories,Information supports any combination of text, clock, barcode, table, and picture.,1-9 levels of grayscale adjustable, plus black printing effect,Up to 600*600DPI resolution, clear and beautiful printing effect,Support U disk information data import and export.

技术参数 Technical Parameters

型号 Model	HC-1000
喷嘴型号 Spray nozzle	0.5吋热发泡专用墨盒 Special ink cartridge for thermal foaming
最大打印高度 Maximum print height	0.5英寸 inch
静态对象 Static object	静态文本,图片,静态条码,表格 Static text, picture, static barcodes, table
墨水类型 Ink type	快干、水性 Quick drying, water-based

热转印打码机 Thermal transfer printer

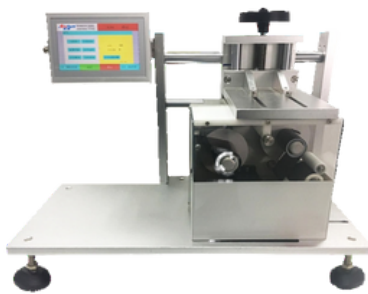

产品描述 Product Description

支持图形、中文打印、序列号、用户自定义文本打印;标配网络接口、USB通讯接口、RS232标准工业串口通讯;可用电脑直接控制;支持变量数据动态打印,包含动态条码、动态二维码、动态中文或其他字符。

Supports pattern, Chinese printing, serial number, and user-defined text printing; standard network interface, USB communication interface, and RS232 standard industrial serial port communication; can be directly controlled by computer; supports dynamic printing of variable data, including dynamic barcodes, dynamic QR codes, dynamic Chinese or other characters.

技术参数 Technical Parameters

打印区域 Print area	32mm x 80mm	32mm x 180mm	53mm x 80mm	53mm x 180mm
打印头 Print head	32mm 300DPI		53mm 300DPI	
打印速度 Print speed	≤400mm/s	≤800mm/s	≤400mm/s	≤800mm/s
打印频次 Print frequency	≤400次/分钟			
色带规格 Ribbon specifications	33mm x 600M (≤900M)		55mm x 600M (≤900M)	



CONTACT US

Multimagotrade.com
+40-758-667-671



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671


真诚品质 · 承诺于世 Sincere Quality & Commitment To The World

FILM Roll/ Bag 膜卷/袋


自立袋 Doypack Pouch



平袋 Flat Pouch

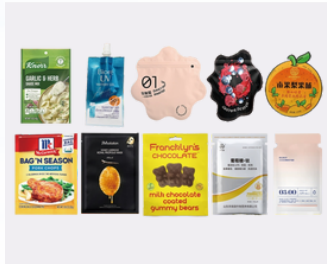

其他袋型 Other pouches

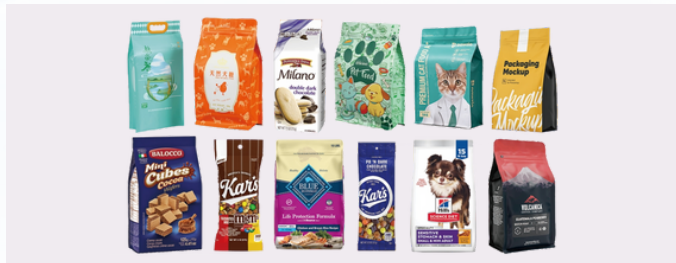

预制袋示意图 Schematic Diagram Of Ready bag



真诚品质 · 承诺于世 Sincere Quality & Commitment To The World


CLASSIC Cases 经典/案列



吸塑铝箔 (FDA)
Aluminum Blister Foil (FDA)




冷成型铝箔
Cold Forming Aluminum Foil/ALU-ALU



纸箔袋 (FDA)
Paper Foil Sachet (FDA)



软双铝膜 (FDA)
Strip Foil (FDA)



CONTACT US

Multimagotrade.com
+40-758-667-671



MULTIMAGO
TRADE

Multimagotrade.com
+40-758-667-671



CONTACT US

Multimagotrade.com
+40-758-667-671