




Interactive Display

4K commercial screen

Anti-glare*|DC dimming*|MEMC motion compensation technology* selects high-quality 4K commercial screen, ultra-wide high-definition picture quality is better, front AG tempered glass, anti-glare and flicker-free screen, effectively eliminating visual fatigue.

Smart whiteboard touch writing

Smart Search*|Smart Form*|Handwriting Recognition*|Scan code to take away 1mm recognition accuracy*+20 points of touch*, a real experience like pen and paper writing. Tables, pictures, etc. can be inserted to make expression more accurate. Supports mobile phone scanning and email, local storage and many other convenient storage methods.

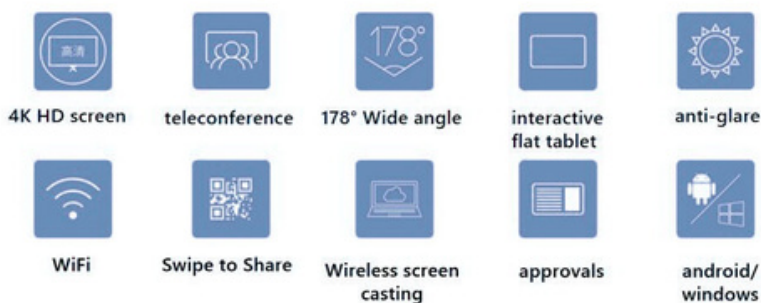

CONTACT US

Multimagotrade.com
+40-758-667-671



Interactive Display

- Dimensions 110 inches
- Screen type AV
- Resolution 3840(H)×2160(V)
- Color level 1.07B(10bit)
- Color gamut 72%
- Contrast ratio 1200:1
- Viewing angle 178°(H/V)
- Screen brightness 350cd/m²

Six mechanisms - simple but not simple

Six machines combined* | -Multi-purpose machine

It integrates projector, whiteboard, computer, monitor, audio and advertising machine into one machine. It has multiple functions, great value and super power. It is simple but not simple.

A classic that looks good both vertically and horizontally

Fourth-level narrow bezels* | Switch between horizontal and vertical directions | Portable and easy to use

Fourth-class narrow bezel, patented appearance design, easy switching between horizontal and vertical screens, meeting the display and interaction needs of different scenes.



CONTACT US

Multimagotrade.com
+40-758-667-671

Interactive Display

Content	T3D Series Android 13 4+32 TOUCH-W/O Camera&MIC			T2W Series Newest Android 14 8+128 TOUCH-With Camera&MIC			
Model	65T3D	75T3D	86T3D	65T2W	75T2W	85T2W	98T2W
Backlight	DLED			DLED			
Resolution	3840*2160			3840*2160			
Viewing angle	178° (H)/178° (V)			178°(H/V)			
Brightness	350nits			350cd/m²			
Contrast ratio	5000:1			Dynamic Contrast 10000:1			
Response time	6.5ms			8ms			
Color	1.07G			1.07B(10 bit)			
System	Android 13			Android 14.0			
Storage	RAM/4G+ROM/32G			4+32			
Input interface	Side Interface: HDMI*2, USB2.0*1, USB3.0*1public-USB2.0*1 (Public USB) Rear Interface: RS232*1, RJ45*1, AUDIO*1, VGA*1,Type-C*1 Front Interface: Type-C*1, HDMI*1, Touch*1, USB3.0*2			RS232 Main Power USB2.0 USB3.0 Ear phone TF CARD RJ45 IN HDMI IN 2.0			
Output interface	AV(mini)*1 LINE*1 ,OPTICAL(SPDIF)*1 TOUCH*1			HDMI out			
Speaker	2*16W(8Ω)			2*15W(8Ω)			
Camera	/	/	/	4800W	4800W	4800W	4800W
MIC	/	/	/	8 PCS	8 PCS	8 PCS	8 PCS
Power	≤250W	≤300W	≤350W	≤250W	≤300W	≤350W	≤400W
Operating voltage	100-240V, 50/60Hz			100-240V, 50/60Hz			
Product dimension(W*D*H)	1490*910*78	1720*1035*78	1970*1175*78	1485.6*900*98	1708*1025*98	1954*1163*98	2225*1331*98
Packing dimension(W*D*H)	1600*190*1015	1830*210*1150	2080*210*1300	1600*190*1015	1830*210*1150	2080*210*1300	2340*300*1430



CONTACT US



Content	H6 Series Android 11 4G+32G		
Model	T55H6	T65H6	T75H6
Backlight	DLED		
Resolution	3840*2160		
Viewing angle	178° (H)/178° (V)		
Brightness	300nits		
Contrast ratio	5000:1		
Response time	6.5ms		
Color	1.07G		
System	Android 11		
Storage	RAM/4G+ROM/32G		
Input interface	Side Interface: RJ45*1,LINE*1,HDMI*2,USB2.0*1,USB3.0*1,USB2.0*1(PUBLIC USB) Rear Interface: OPTICAL OUT*1,RS232*1,VGA*1,MIC*1,PC AUDIO*1, Front Interface: Type-C*1, HDMI*1, Touch*1, USB3.0*2		
Output interface	AV(mini)*1 LINE*1 ,OPTICAL(SPDIF)*1 TOUCH*1		
Speaker	2*10W(8Ω)		
Camera	/	/	/
MIC	/	/	/
Power	≤150W	≤200W	≤250W
Operating voltage	100-240V, 50/60Hz		
Product dimension(W*D*H)	1230*710*67mm	1448*832*68mm	1669*956*74 mmmm
Packing dimension(W*D*H)	1330*150*830mm	1560*180*935mm	1810*175*1090mm



CONTACT US



Digital Signage-Stand

- Different size for optional
- Wide range of applications
- Customized product appearance and logo
- Enabling more delicate detail
- Experiencia moderna

This series of products are widely used in commercial centers, financial places, restaurants, subways, airports, exhibition centers, recreational clubs, hospitals, and other places.



2K/4K HD screen



178° Wide angle



Multi-split screen



WIFI



Android/
windows



30 Media playback
formats



Remote control



Smart Split
Screen



CONTACT US

Multimagotrade.com
+40-758-667-671



A variety of different design Meet your different needs

Interactive Signage
Digital Solution

Digital interactivity leads to repeat visits and improved customer engagement. Human-machine interaction provides rewarding in-person experience and possibly helps to turn your prospects into customers.



CONTACT US

Multimagotrade.com
+40-758-667-671

Content	E Series Android 12 4G+32G With Touch		K Series Android 12 4G+32G Without Touch		X Series Android 12 4G+32G Without Touch	
Model	E55LS	E65LS	55K6-LS	65K6-LS	75X5LS	85X5LS
Backlight	ELED				DLED	
Resolution	3840*2160					
Viewing angle	178° (H)/178° (V)					
Brightness	350nits	350nits	350nits	350nits	350nits	350nits
Contrast ratio	5000:1					
Response time	6.5ms					
Color	1.07G					
System	Andriod12					
Storage	4G +32G					
Input interface	USB2.0*1 /USB3.0*1 /RJ45 IN*1 HDMI IN 2.0*1					
Output interface	/					
Speaker	2*5W(8Ω)					
Power	≤120W	≤150W	≤120W	≤150W	≤250W	≤300W
Operating voltage	100-240V, 50/60Hz					
Product dimension(W*D*H)(mm)	723.4*1905.5*483	848*2000*550	720.4*1899*54	843.5*2000*550	945*1727*500	1070*1950*503
Packing dimension(W*D*H)(mm)	2000*190*840	2100*210*980	2000*190*840	2100*210*980	1810*180*1100	2030*180*1230



CONTACT US

Multimagotrade.com
+40-758-667-671



Video Wall

Video Walls - the ultimate game-changer for unforgettable experiences!

Whether you're hosting a conference, trade show, or special event, unleash the power of infinite flexibility with our cutting-edge Video Wall solutions! 💡🌟

💡 Imagine captivating your audience with stunning visuals that stretch seamlessly across multiple screens, creating an immersive environment like never before! With Video Walls, the possibilities are endless - customize layouts, display dynamic content, and amplify engagement with ease.



CONTACT US

Multimagotrade.com
+40-758-667-671

双边物理拼缝0.88mm、1.7mm、3.5mm



*产品以实物为准

Video Wall

Display information	43" 46" 49" 55" 65"
Physical patchwork	0.88/1.7/3.5mm
Resolution	1920X1080
Brightness	500cd/m ²
Contrast	4000 : 1
Viewing angle	178°
Backlight type	HXV LED
Interface information	
HDMI input	1
DVI input	1
VGA input	1
Video input (BNC terminal)	1
Network cable input (RJ45)	1
Network cable output (RJ45)	1
power supply	
information power	<140W



CONTACT US



Advertising Display

- Different size for optional
- Wide range of applications
- Customized product appearance and logo
- Simple and smooth
- Elegant appearance
- Stable and reliable full sheet metal design

This product is widely used in traffic command centers, financial places, public security and judiciary institutions, subways, railway stations, airports, exhibition centers, commercial office buildings, recreational



2K/4K HD screen



178° Wide angle



Ultra-narrow bezel



WIFI



Android/
windows



30 Media playback
formats



Remote control



Smart Split
Screen



CONTACT US

Multimagotrade.com
+40-758-667-671



Advertising Display- Without Touch

Content	Advertising machine/Android 12 4G+32G/ horizontal and vertical screen wall-mounted display				
Model	AC32 2K	AC43 2K	AC50 4K	AC55 4K	AC65 4K
Backlight	ELED				
Resolution	1920*1080		3840*2160		
Viewing angle	178° (H)/178° (V)				
Brightness	350nits	350nits	350nits	350nits	350nits
Contrast ratio	5000:1				
Response time	6.5ms				
Color	16.7 M		1.07G		
System	Andriod12				
Storage	4G +32G				
Input interface	RS232 *1 DC Power*1 USB2.0*1 USB3.0*1 TF CARD *1 RJ45 IN*1 HDMI IN 2.0*1				
Output interface	LINE*1				
Speaker	2*5W(8Ω)				
Power	100-240V, 50/60Hz				
Operating voltage	≤60W	≤80W	≤90W	≤120W	≤150W
Product	100-240V, 50/60Hz				
dimension(W*D*H)(mm)	737.4*432*54	980*568*54	1135*655.4*54	1249*719.4*54	1467.5*842.5*54
Packing	1080*150*680				
dimension(W*D*H)(mm)	845*130*545	1080*150*680	1240*150*775	1360*150*845	1570*150*960



CONTACT US

Multimagotrade.com
+40-758-667-671




Advertising Display-IR Touch

Content	Advertising Display Android 12 4G+32G / horizontal and vertical screen wall-mounted display /IR touch			
Model	EC43 2K-IR Touch	EC50 4K-IR Touch	EC55 4K-IR Touch	EC65 4K-IR Touch
Backlight	ELED			
Resolution		3840*2160		
Viewing angle	178° (H)/178° (V)			
Brightness	350nits	350nits	350nits	350nits
Contrast ratio	5000:1			
Response time	6.5ms			
Color	16.7M	1.07G		
System	Andriod12			
Storage	4G +32G			
Input interface	RS232 *1 DC Power*1 USB2.0*1 USB3.0*1 TF CARD *1 RJ45 IN*1 HDMI IN 2.0*1			
Output interface	LINE*1			
	2*5W(8Ω)			
Speaker				
Power	≤80W	≤90W	≤120W	≤150W
Operating voltage	100-240V, 50/60Hz			
Packing dimension(W*D*H)(mm)	980*568*54mm	1135*655.4*54mm	1249*719.4*54mm	1467.5*842.5*54mm
Backlight	1080*150*680mm	1240*150*775mm	1360*150*845mm	1570*150*960mm



CONTACT US

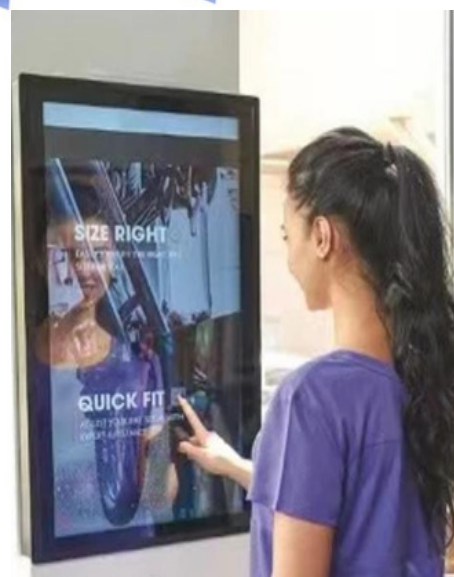

Advertising Display- Capacitive touch

Model	AE32	AE43	AE55(2K)	AE55(4K)
Size	32 inch	43 inch	55 Inch	55 Inch
Maximum display size	698.4 (H) ×392.3(V) (mm)	940.9 (H) ×529.3(V) (mm)	1209.6 (H) ×680.4(V) (mm)	1209.6 (H) ×680.4(V) (mm)
Resolution	1920(H)×1080(V)	1920(H)×1080(V)	1920(H)×1080(V)	3840(H)×2160(V)
Viewing angle	178°(H/V)	178°(H/V)	178°(H/V)	178°(H/V)
Input power	100-240V/AC, 50/60Hz	100-240V/AC, 50/60Hz	100-240V/AC, 50/60Hz	100-240V/AC, 50/60Hz
Machine size	700.4*448.5*53.7mm	982*572.3*62.6mm	1263.2*734*54mm	1263.2*734*54mm
Packaging size	840*130*545mm	1080*150*680mm	1355*150*840 mm	1355*150*840 mm
Net weight	10kg	14.5KG	27kg	27kg
Gross weight	13.3kg	19.5KG	34.2kg	34.2kg
Interface	DC Power*1 USB2.0*1 USB3.0*1 TF CARD *1	DC Power*1 USB2.0*1 USB3.0*1 TF CARD *1	DC Power*1 USB2.0*1 USB3.0*1 TF CARD *1	DC Power*1 USB2.0*1 USB3.0*1 TF CARD *1
	RJ45 IN*1 HDMI IN 2.0*1	RJ45 IN*1 HDMI IN 2.0*1	RJ45 IN*1 HDMI IN 2.0*1	RJ45 IN*1 HDMI IN 2.0*1
Output interface	LINE*1	LINE*1	LINE*1	LINE*1
Left and right channels	2*5W(8Ω)	2*5W(8Ω)	2*5W(8Ω)	2*5W(8Ω)
System version	Andriod 11.0	Andriod 11.0	Andriod 11.0	Andriod 11.0
CPU	Amlogic T982 A55*4 64Bit main frequency2.0 GHz	Amlogic T982 A55*4 64Bit main frequency2.0 GHz	Amlogic T982 A55*4 64Bit main frequency2.0 GHz	Amlogic T982 A55*4 64Bit main frequency2.0 GHz
GPU	Mali G52MP2	Mali G52MP2	Mali G52MP2	Mali G52MP2
RAM	2G DDR / 4G	2G DDR / 4G	2G DDR / 4G	2G DDR / 4G
ROM	16G / 32G	16G / 32G	16G / 32G	16G / 32G



CONTACT US



Multi-screen Display

Shopping Entrance & External Facade


As the gateway to the Shopping mall, multi displays can quickly translate into business value by displaying dining options, upcoming events and more, making it the perfect place to advertise.

The eye-catching LCD display design and bright, colorful video displays make for an impressive that keeps visitors coming back.



CONTACT US

Multimagotrade.com
+40-758-667-671

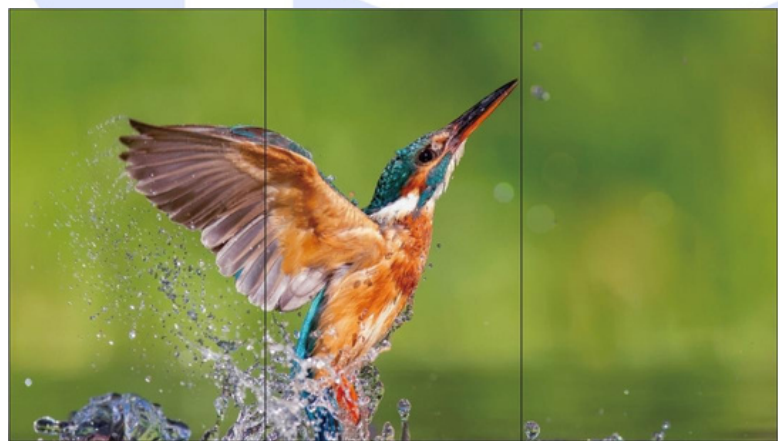

Multi-screen Display

<i>Display information</i>		65"75"85"98"
<i>Physical patchwork</i>		1.5mm
<i>Resolution</i>		3840X2160
<i>Brightness</i>		320-350cd/m ²
<i>Contrast</i>		5000 : 1
<i>Viewing angle</i>		178°
<i>Backlight type</i>		HXV LED
<i>Interface information</i>		
<i>HDMI input</i>		1
<i>DVI input</i>		1
<i>VGA input</i>		1
<i>Video input (BNC terminal)</i>		1
<i>Network cable input (RJ45)</i>		1
<i>Network cable output (RJ45)</i>		1
<i>power supply</i>		
<i>information power</i>		<140W



CONTACT US



Casino Display

Create An Immersive Decorative Effect

Firmly catching customers' eyes in noisy environment, the rich color-changing display LCD displays with an internal casino establishes an exciting atmosphere and interior experience.

We can recommend the right LCD display solution for your interior design needs, and we can customize the LCD display with curved, spherical, strip, and more.



CONTACT US

Multimagotrade.com
+40-758-667-671

Carsino Display

Model	WD-WG6532	WD-WG6531	WD-WG6533	WD-WG6542	WD-WG6541	WD-WG6555	WD-WG6556	WD-WG6556
Size	32	32	32	43	43	55	55	55
Type	C-Sharp	C-Sharp with Lamp	J-shaped with lamp	C-shaped with lamp	J-shaped with lamp	C-shaped with lamp	C-shaped with lamp	J-shaped with lamp
Ratio	16:09	16:09	16:09	16:09	16:09	16:09	16:09	16:09
Shape	Curved Screen, R1800	Curved Screen, R1800	Curved Screen, R1800	Curved Screen, R1500	Curved Screen, R1500	Curved Screen, R1500	Curved Screen, R1500	Curved Screen, R1500
Display Area	698.4×392.85mm	698.4×392.85mm	698.4×392.85mm	941.148×529.416	941.148×529.416	1209.6×680.4mm	1209.6×680.4mm	1209.6×680.4mm
Resolution	1920×1080 (FHD)	1920×1080 (FHD)	1920×1080 (FHD)	3840×2160 (UHD)	3840×2160 (UHD)	3840×2160 (UHD)	3840×2160 (UHD)	3840×2160 (UHD)
Response Time	8ms	8ms	8ms	6ms	6ms	8ms	8ms	8ms
Color	16.7M	16.7M	16.7M	16.7M/1.07B, 67% NTSC	16.7M/1.07B, 67% NTSC	1.07B, 68% NTSC	1.07B, 68% NTSC	1.07B, 68% NTSC
Luminance	250cd/m ²	250cd/m ²	250cd/m ²	400cd/m ²	400cd/m ²	500cd/m ²	500cd/m ²	500cd/m ²
Contrast	3000:1	3000:1	3000:1	1000:1	1000:1	4000:1	4000:1	4000:1
Visual Angle	89/89/89/89 (Typ.)(CR≥10)	89/89/89/89 (Typ.)(CR≥10)	89/89/89/89 (Typ.)(CR≥10)	89/89/89/89 (Typ.)(CR≥10)	89/89/89/89 (Typ.)(CR≥10)	89/89/89/89 (Typ.)(CR≥10)	89/89/89/89 (Typ.)(CR≥10)	89/89/89/89 (Typ.)(CR≥10)
Touch	capacitance	capacitance	capacitance	capacitance	capacitance	capacitance	capacitance	capacitance
Interface	USB	USB	USB	USB	USB	USB	USB	USB
Product Color	Black (white is optional)	Black (white is optional)	Black (white is optional)	Black (white is optional)	Black (white is optional)	Black (white is optional)	Black (white is optional)	Black (white is optional)
Curvature	R1800	R1800	R1800	R1500	R1500	R1500	R1500	R1500
Audio Interface	Audio In/Earphone Out	Audio In/Earphone Out	Audio In/Earphone Out	Audio In/Earphone Out	Audio In/Earphone Out	Audio In/Earphone Out	Audio In/Earphone Out	Audio In/Earphone Out
I/O	HDMI、VGA、USB	HDMI、VGA、USB	HDMI、VGA、USB	HDMI、VGA、USB	HDMI、VGA、USB	HDMI *3、DP *1、USB -A*1、USB-B*1	HDMI *3、DP *1、USB -A*1、USB-B*1	HDMI *3、DP *1、USB -A*1、USB-B*1



CONTACT US



LED Display

Modernize Your Place


Use our Led Display Solutions, Stand out loud and clear from the competition with show-stopping displays that light up the floor, accent architecture, and create an immersive experience.

Stimulating environments—guests want to feel as though they're surrounded by entertainment. Interactive HD screens can enhance the guest experience and make more exciting. Use large video walls to draw in traffic from across the floor, or mount screens throughout the area with news updates, sporting events, or other popular broadcasts.



CONTACT US

Multimagotrade.com
+40-758-667-671

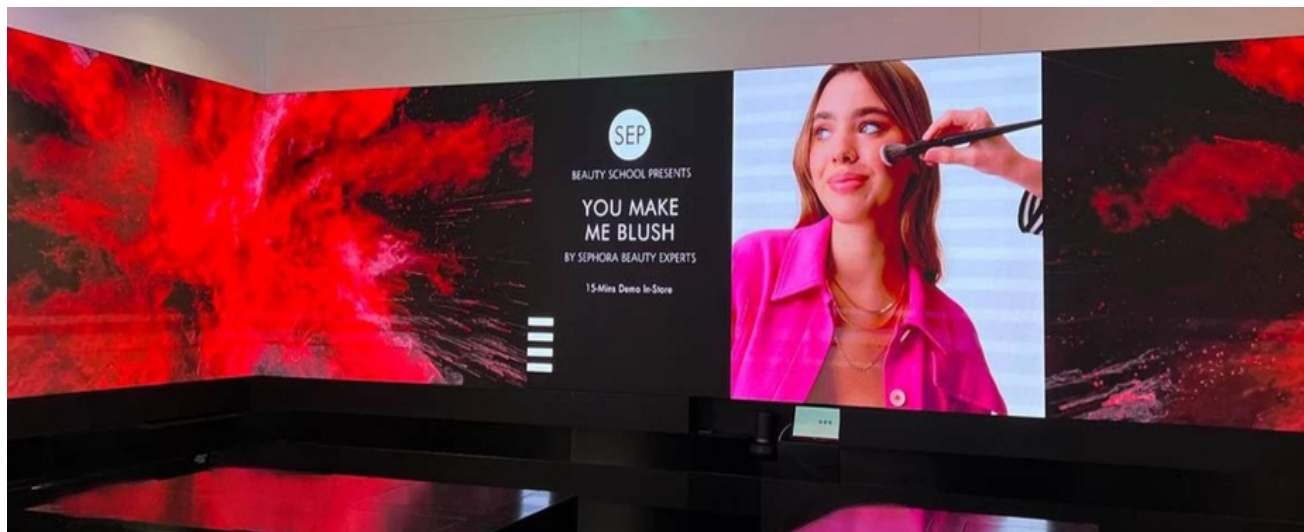


Indoor LED

- Flexible and compact, flat, curved, smooth splicing, compatible with front and back maintenance
- Low brightness and high gray lossless technology, always able to present any picture perfectly and meticulously, leading the industry
- Natural heat dissipation, no fan, zero noise at work
- High heat dissipation panel processing technology for fast heat dissipation and longer life

Product	P2 2mm	P2.5	P3	P4	P5	P6
Pixel pitch	250000dot/m ²	2.5mm	3mm	4mm	5mm	6mm
Pixel density	128*64dots	160000dot/m ²	111111dot/m ²	62500dot/m ²	40000dot/m ²	27777dot/m ²
Module	25W	64*64dots	64*64dots	64*32dots	64*16dots	64*32dots
resolution	256*128mm	15W	15W	20W	20W	20W
Module power	512*512mm	160*160mm	192*192mm	256*128mm	320*160mm	192* 192mm
Module size	512*512mm	480*480mm	576*576mm	512*512mm	640*640mm	576*576mm
Box specification	1/32S	1/32S	1/32S	1/16S	1/16S	1/16S
Drive mode	≥1200cd	≥1200cd	≥1300cd	≥1200cd	≥1400cd	≥1500cd
Brightness	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
Refresh rate	2-10m	2.5-18m	3-10m	4-28m	5-35m	6-42m
Viewing distance	1200W/m ²	800W/m ²	800W/m ²	860W/m ²	700W/m ²	700W/m ²
Maximum power	FM6124	FM6124	FM6124	FM6124	FM6124	FM6124
Drive IC						



CONTACT US

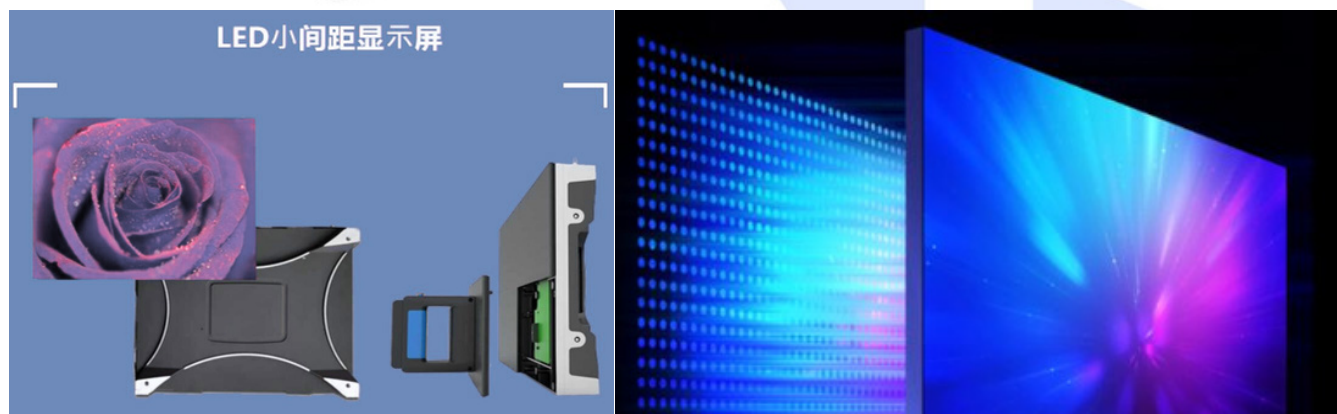

COB LED


- Uniform brightness and chromaticity, no color cast, no seams, ultra-wide viewing angle
- Intelligently adjustable color temperature, broadcast-level color gamut
- Intelligent brightness adjustment, adaptive environment, no fatigue after long-term viewing
- Ultra-high refresh display, fast frame change speed, eliminate ghosting and no tailing
- Ultra-high contrast, ensuring the color performance of the picture

Product	P1.25	P1.56	P1.667	P1.83	P1.86	P1.875
Pixel pitch	1.25mm	1.56mm	1.667mm	1.83mm	1.86mm	1.875mm
Pixel density	640000dot/m ²	409600dot/m ²	360000dot/m ²	295664dot/m ²	288906dot/m ²	284444dot/m ²
Module resolution	160*120dots	128*96dots	120*90dots	176*88dots	192*86dots	128*128dots
Module power	30W	30W	25W	25W	25W	20W
Module size Box	200*150mm	200*150mm	200*150mm	320*160mm	320*160mm	240*240mm
specification Drive	400*300mm	400*300mm	400*300mm	640*640mm	640*640mm	480*480mm
mode Brightness	1/60S	1/48S	1/30S	1/58S	1/43S	1/32S
Refresh rate	≥800cd	≥800cd	≥800cd	≥1000cd	≥1000cd	≥1000cd
Viewing distance	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
Maximum power	2-50m 1250W/m ²	900W/m ²	1000W/m ²	1000W/m ²	1000W/m ²	1000W/m ²
Drive IC	ICN2153	ICN2153	ICN2153	ICN2153	ICN2153	ICN2153



CONTACT US

Multimagotrade.com
+40-758-667-671

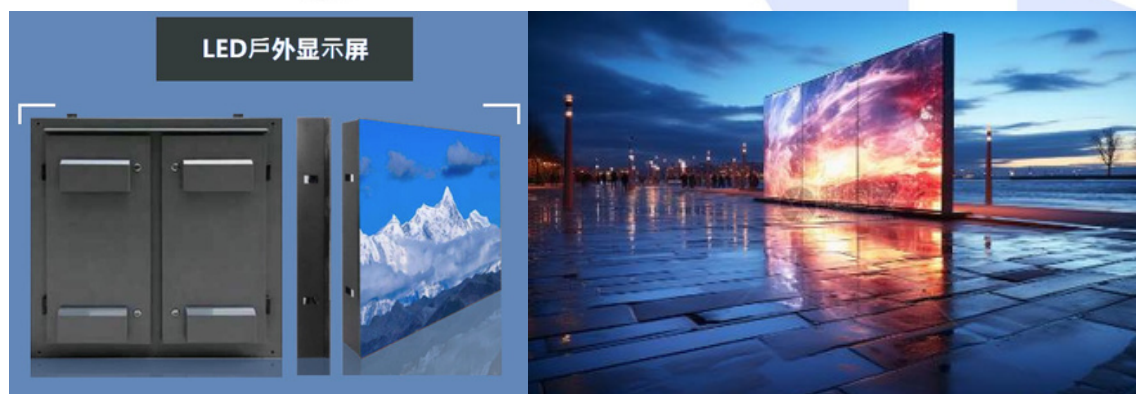


Outdoor LED

- **Strong structure:** The box adopts die stamping and folding technology, which has high strength; CNC precision machining, accurate size and good consistency
- **Ultra-wide viewing angle:** The horizontal and vertical viewing angles can reach 140°, and high-quality display effects can be seen at all angles
- **Easy maintenance:** The box has a rear door design, and the module can be maintained from the front/back
- **Energy saving and environmental protection:** Excellent heat dissipation performance, low power consumption, and high stability

Product	Pixel	P2.5	P3 3mm	P4 4mm	P5 5mm	P6	P8 8mm
pitch	Pixel	2.5mm	111111dot/ m ²	62500dot/ m ²	4000dot/ m ²	6mm	15625dot/ m ²
density	Module	160000dot/m ²	64*64dots	64*32dots	32*32dots	27777dot/m ²	32*16dots
resolution		64*64dots	45W	25W	25W	64*64dots	30W
Module power		30W	192*192mm	256*128mm	160*160mm	35W	256*128mm
Module size		160*160mm	576*576mm	512*512mm 1/8S	960*960mm	192*192mm	768*768mm
Box specification		640*640mm	1/16S	5500-	1/8S	576*576mm	1/4S
Drive mode		1/16S	5500-	6000cd		1/8S	
Brightness		≥5000cd	6000cd	≥1920Hz 4-	≥5500cd	≥6000cd	≥6500cd
Refresh rate		≥1920Hz	≥1920Hz	35m	≥1920Hz	≥1920Hz	≥1920Hz
Viewing distance		2.5-50m	3-40m	1250W/ m ²	5-35m	6-70m	10-70m
Maximum power		1200W/m ²	1250W/m ²	FM6124	1200W/m ²	900W/m ²	850W/m ²
Drive IC		FM6124	FM6124	FM6124	FM6124	FM6124	FM6124



CONTACT US

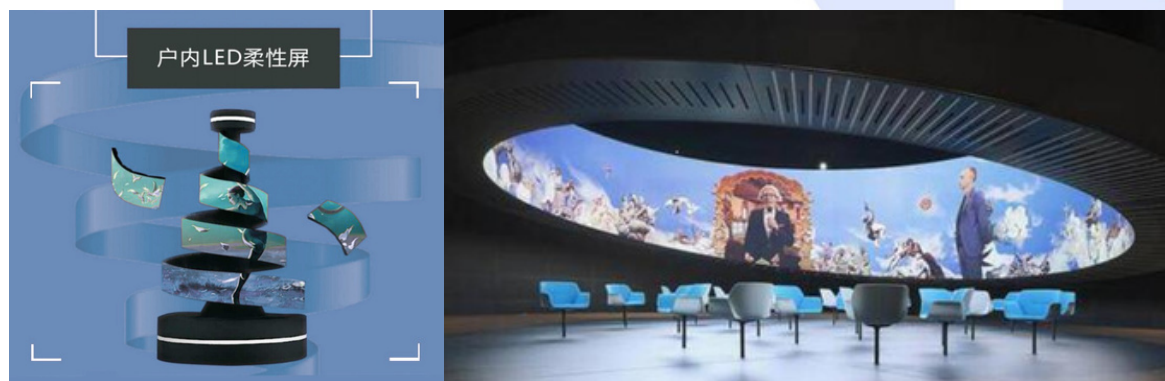

Flexibility LED

- **Ultra-flexible:** can design rolling, bending and swinging effects according to customer needs
- **Ultra-thin:** using special materials and advanced technology, ultra-thin and ultra-light, the weight of a single module is only 85g
- **No box:** reduces the weight of the LED screen, reduces costs, and can be designed in any shape according to customer needs
- **Easy to install:** adopts strong magnetic adsorption installation, direct adsorption
- **Quality assurance:** 10,000 bending and folding tests, 1,500 days of terminal market application

Pixel pitch	1.579mm	1.875mm	2mm	2.5mm	3mm	4mm
Pixel density	401111dot/m ²	284444dot/m ²	250000dot/m ²	160000dot/m ²	111111dot/m ²	62500dot/m ²
Module resolution	152*76dots	128*64dots	128*64dots	128*64dots	80*40dots	64*32dots
Module power	35W	20W	20W	20W	48W	48W
Module size	240*120mm	240*120mm	256*128mm	320*160mm	240*120mm	256*128mm
Drive mode	1/38S	1/32S	1/32S	1/32S	1/16S	1/16S
Brightness	≥800cd	≥800cd	≥780cd	≥800cd	≥800cd	≥800cd
Refresh rate	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
Viewing distance	1-30m	2-30m	2-30m	3-30m	3-30m	4-30m
Maximum power	800W/m ²	780W/m ²	7800W/m ²	800W/m ²	780W/m ²	800W/m ²
Drive IC	ICN2153	ICN2153	FM6124	ICN2153	FM6124	FM6124



CONTACT US

Multimagotrade.com
+40-758-667-671



Product	P1	P2	P3	P5	P8	P10
Pixel pitch	1.9*3.9mm	2.8*5.6mm	3.91*7.81mm	5.2*10.4mm	7.8*7.8mm	10.4*10.4mm
Pixel density	129,024dot/m ²	61,952dot/m ²	32,768dot/m ²	18,432dot/m ²	16,384dot/m ²	9,216dot/m ²
Module resolution	252*16dots	176*22dots	128*16dots	96*12dots	64*16dots	48*12dots
Module power	504*128dits	352*88dits	256*64dits	192*48dits	128*64dits	96*48dits
Module size	>42%	>45%	>65%	>75%	>65%	>75%
Box specification	1000*500mm	1000*500mm	1000*500mm	1000*500mm	1000*500mm	1000*500mm
Drive mode	<3.5kg	<3.5kg	<3.5kg	<3.5kg	<3.5kg	<3.5kg
Brightness	800-4500 nits	800-5500 nits	800-5500 nits	800-5500 nits	800-5500 nits	800-8000 nits
Refresh rate	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
Viewing distance	160-240W/m ²	160-240W/m ²	160-240W/m ²	160-240W/m ²	160-240W/m ²	160-240W/m ²
Maximum power	400/800W/m ²	400/800W/m ²	400/800W/m ²	400/800W/m ²	400/800W/m ²	400/800W/m ²
Drive IC	SM16218	CS2017	CS2017	CS2017	CS2017	CS2017

LED transparent screen

- **Highly transparent:** borderless design, high transparency, little effect on the lighting perspective of the glass curtain wall
- **Slim and light:** the screen thickness is 3.5 mm, and the product weighs only about 7 kg per square meter
- **Wide viewing angle:** 160° viewing angle, the screen can be viewed from multiple angles
- **Easy to install:** modular design, easy to assemble and install the box



CONTACT US